

# Adventurer™ Pro NTEP Approved

**Precision Balances** 



### Adventurer™ Pro – The Most Complete Balance in Its Class!

Since its introduction, the OHAUS Adventurer™ *Pro* has established itself as the industry's most versatile balance. It counts, it sums, it holds and it delivers traceable results. Now, we're taking versatility to the next level by expanding the Adventurer *Pro* line to include a range of NTEP approved precision models. The Adventurer *Pro* meets or exceeds the Class II or III accuracy requirements in accordance with the National Institute of Standards and Technology (NIST) Handbook 44. Certificate of Conformance Number 05-118 was issued under the National Type Evaluation Program (NTEP) of the National Conference on Weights and Measures. NTEP approved Adventurer *Pro's* make it easy to comply with current regulations in a variety of markets including:

### Standard Features Include:

- Direct sales to the public of precious metals and semi-precious gems
- Direct sales to the public of dry commodities such as coffee, nuts, candy and tobacco
- Pharmacy use


### No other balance in its class offers all these features in a compact design:

- SmarText™ Software Guides Users Through Balance Use
- QuadraStance<sup>™</sup> Design Provides Superior Footprint
- Flexibility of Available Options

# Adventurer<sup>TM</sup> Pro NTEP Balances

## SmarText™ Software Guides Users Through Balance Use

SmarText<sup>™</sup> is OHAUS' easy to use balance software that utilizes text prompts to guide users through application use and balance setup. Delivered through a 2-line backlit LCD and clearly marked buttons, SmarText tells you what is going on and what you have to do next.







# **QuadraStance™ Design Provides Superior Footprint**

QuadraStance<sup>™</sup> design incorporates four feet to provide superior footprint stability on any surface. QuadraStance helps prevent rocking and tipping enhancing the weighing stability of the balance

Along with QuadraStance, Adventurer *Pro* has also been designed with an up front level indicator eliminating the need to look behind the balance during the leveling process. A quick glance at the up front level indicator helps to ensure that the balance is level prior to each use.

## **Available Second Interface Options**

Along with an included RS232, an available second RS232 or USB interface option allows connection to multiple peripherals with full GLP/GMP data output. GLP/GMP data is valuable for traceability and compliance requirements

The feature rich Adventurer *Pro* is built with a large stainless steel weighing platform, mechanical and software overload/underload protection, an integrated security bracket, weigh below hook and has a standard protective in-use cover.



Software features include a stability indicator, a low battery indicator, user selectable span calibration points, auto tare, user selectable printing options, user selectable communications settings, user selectable data print options, user definable project & user ID's, a software reset menu and a software lockout menu.

### Multiple Application Modes: (not available in Legal for Trade mode)

- **Animal Weighing Mode** This mode allows the user to weigh small animals and filters out animal movements to provide a stable weight indication
- Parts Counting with Optimization This mode allows the user to count based on a calculated piece weight. With optimization, counting accuracy is improved through auto re-calculation of the piece weight
- Percentage Mode This mode allows the user to display the weight of a sample as a
  percentage of a reference weight
- Check Weighing Mode This mode allows the user to check the weight of a sample against a preset target
- **Totalization Mode** This mode allows the user to sum a series of sample weights
- Display Hold Mode This mode allows the user to hold the highest stable weight on the display until cleared







## Feature Rich: Adventurer Pro Is The Most Complete Balance In Its Class

### To prevent unwarranted movement or theft, an integrated security bracket accommodates the security device

accessory

### Easy to Clean Security


Adventurer Pro's stainless steel platform and removable wind ring make it extremely easy to clean

Adventurer Pro comes with an RS232 interface. A second RS232 or USB interface is also available as a user installed option

Connectivity



Adventurer Pro features a 2-line alphanumeric LCD with brilliant backlight. Portable models include a backlight auto-off feature to conserve battery life



and can operate on either the included AC adapter, or on 4 "AA" batteries. An Auto

Shutoff feature helps conserve battery life



Weigh-Below Hook

Adventurer Pro's integral weigh-below hook allows density determination

or calculating the specific gravity of samples


Multiple Weighing Units

Adventurer Pro features multiple weighing units including a userdefined custom unit for use in unique weighing applications

Easy to Use Keypad

Four-button keypad with dedicated YES, NO, BACK and EXIT functions simplify menu navigation and balance set-up

### **Outline Dimensional Drawings**

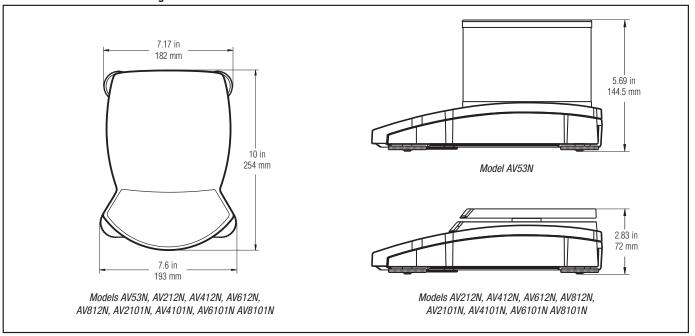

# Adventurer<sup>TM</sup> *Pro* NTEP Balances

### **Specifications**

Model	AV53N	AV212N	AV412N	AV612N	AV812N	AV2101N	AV4101N	AV6101N	AV8101N	
Capacity (g)	51	210	410	610	810	2100	4100	6100	8100	
Readability "d" (g) "e" = "d"	0.02	0.1				1				
Repeatability (Std. dev.) (g)	0.02	0.1				1				
Linearity (g)	± 0.02	± 0.1				± 1				
Class	II	III								
Weighing Units Legal for Trade Mode	Milligram, Gram, Ounce, Carat, Pennyweight, Ounce Troy, Grain	Ounce, Carat, Pennyweight, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Ounce Troy, Grain								
Additional Weighing Units Not Legal for Trade Mode	Newton, Hong Kong Tael, Singapore Tael, Taiwan Tael, Momme, Tical, Baht, Mesghal, Tola, Custom									
Application Modes Not Legal for Trade Mode	Animal / Dynamic Weighing, Parts Counting with Automatic Sample Recalibration, Percent Weighing, Checkweighing, Totalization, Display Hold									
Tare Range	To capacity by subtraction									
Stabilization Time (s)	2.5	1.5		3				2		
Operating Temperature Range	50° - 104°F / 10° - 40°C									
Power Requirements	AC Adapter (Included) or 4 AA Batteries (Not Included)									
Calibration	Digital with External Weight									
Display Type	2-Line Alphanumeric Backlit LCD									
Display Size (in/cm)	4 x 1 / 10 x 2.5									
Draftshield Type Height Over Pan (in/cm)	Round: 2.75 / 7	None								
Pan Size (in/cm)	3.9 / 10 dia.	4.7 / 12 dia. 5.8 x 6.3 / 14.9 x 16.2								
Balance Dimensions W x H x D (in/cm)	7.6 x 5.7 x 10 / 19.3 x 14.5 x 25.4	7.6 x 2.8 x 10 / 19.3 x 7.2 x 25.4								
Shipping Dimensions W x H x D (in/cm)	10.9 x 6.3 x 15.2 / 27.6 x 27.6 x 38.5	10.9 x 6.3 x 15.2 / 27.6 x 16 x 38.5								
Net Weight (lb/kg)	3.1 / 1.4	2.6 / 1.2 3.3 / 1.5								
Shipping Weight (lb/kg)	5.7 / 2.6	4.8 / 2.2 5.5 / 2.5								

#### **Approvals**

NTEP, Certificate Number 05-118
CE, FCC, <sub>c</sub>UL<sub>us</sub>, <sub>c</sub>CSA<sub>us</sub>, NRTL
C Tick
CB Scheme
IP33 (without Power Adapter; with Pan put on)
IP20 (with Power Adapter, with Pan put on)

Options and Accessories  Dot Matrix Printer	OHAUS Number 80252042
Cable kit to connect Dot Matrix Printer to Adventurer <i>Pro</i>	
Paper for Dot Matrix Printer	80251932
Ink Ribbon for Dot Matrix Printer	80251933
Thermal Printer	80251992
Paper for Thermal Printer	80251931
Cable kit to connect Thermal Printer to Adventurer <i>Pro</i>	80252581
Ohaus Collect Software	80500746
TAL Software WinWedge	
RS232 Cable, PC 25 Pin to Adventurer Pro	80500524
RS232 Cable, PC 9 Pin to Adventurer Pro	80500525
Density Determination Kit for Adventurer Pro analytical balances (0.1mg) except AV53	80253384
Security Device for Adventurer <i>Pro</i>	76288-01
In-Use Cover for Adventurer Pro (large housing)	12103879
2nd RS232 Interface Kit for Adventurer Pro	80850092
USB Interface Kit for Adventurer <i>Pro</i>	

#### **OHAUS CORPORATION**

\* 7 Campus Drive Suite 310 Parsippany, NJ 07054 USA

Tel: 800.672.7722 973.377.9000 Fax: 973.944.7177

www.ohaus.com

With offices throughout Europe, Asia, and Latin America

\* ISO 9001

80774380\_D © Copyright OHAUS Corporation

Registered Quality Management System

