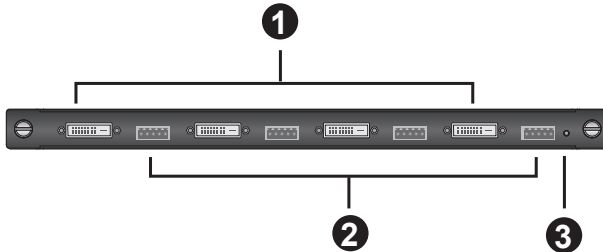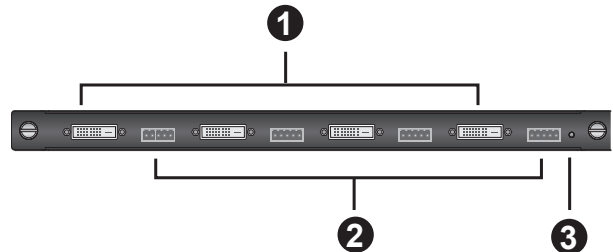# VM7604 / VM8604
4-Port DVI Input/Output Board Quick Start Guide

VM7604 Front View

VM8604 Front View

Hardware Review

VM7604 Front View

1. DVI Input Ports
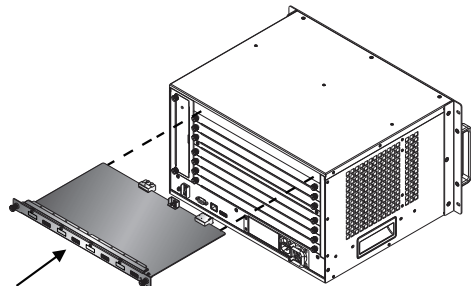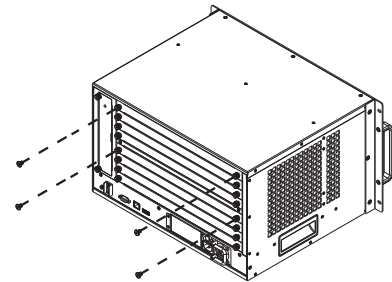2. Audio Input Ports
3. Status LED

VM8604 Front View

1. DVI Output Ports
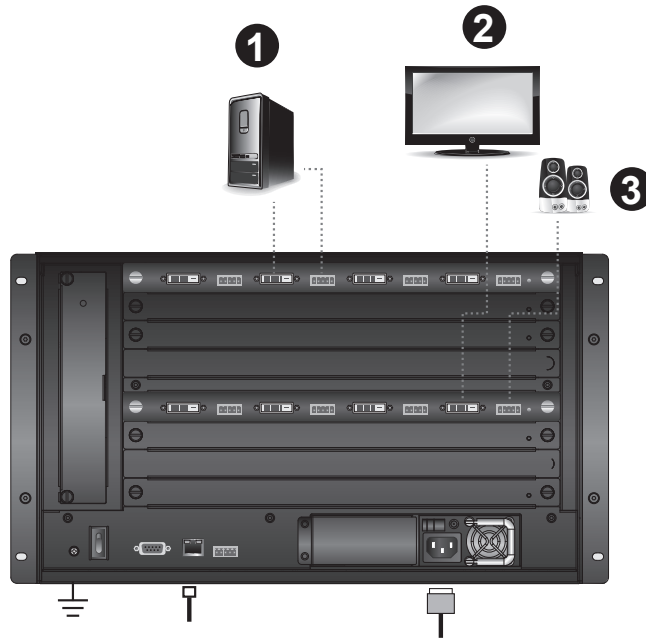2. Audio Output Ports
3. Status LED

Hardware Setup

I/O Board Installation

1. (Optional) Power off the Modular Matrix switch.
   Note: The Input/Output Boards are hot swappable.

2. On the rear of the VM1600 unscrew the two phillips head screws and remove a back panel

3. Slide the I/O board into the open slot on the VM1600 until it secures in place.
   Note: The upper four slots are for input boards; the lower four slots are for output boards.

4. Tighten the screws on the I/O board to fasten it to the Modular Matrix switch, until its secure.

5. Repeat the steps if you are installing more I/O boards.
6. Power on the Modular Matrix switch.

Installation

1. Connect your A/V input source device to the DVI / audio input port of the VM7604.
2. Connect your video display device to the DVI output port of the VM8604.
3. Connect your speakers / audio output device to the Audio output port of the VM8604.
4. Power on the VM1600 and all devices in the installation