
Natural Cork Panels & Rolls

Tackboard Resurfacing Material





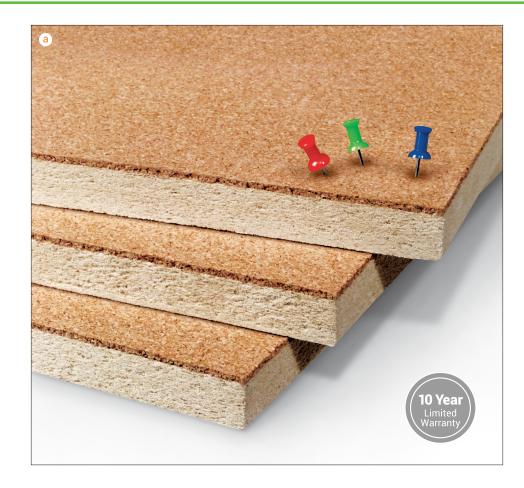

Natural Cork Panels & Rolls

Renew or replace any torn or worn board with natural cork panels and rolls. Natural cork is an environmentally responsible and naturally renewable resource. Cork is harvested from a cork tree, stripped with careful cuts that do not harm the inner core of the tree. The cork bark regrows, and this process allows a useful life of more than 150 years for each tree. TAA compliant. Manufactured in the US of foreign and domestic materials. Ten year limited warranty.

- A. Natural Add-Cork Panel A durable tackable layer of .13" natural cork bonded to .38" lightweight tackable core material.
- **B. Natural Cork-Plate Panel** The ultimate in tack surfaces, featuring a layer of .25" natural cork laminated to .25" moisture-resistant rigid core material.
- C. Natural Cork Roll Available either cut to size or in precut sizes. Adhesive for rolls sold separately. Please add fiberboard or other appropriate backer to allow for use as tack surface.

Part No.	Product Dim.	Ship Wt.
A. Natural Add	-Cork Panel	
302XD [†]	4'H x 4'W	18 lbs
302XG [†]	4'H x 6'W	27 lbs
302XH [†]	4'H x 8'W	36 lbs
302XK	4'H x 10'W	45 lbs
302XM	4'H x 12'W	54 lbs
B. Natural Cork	-Plate Panel	
303XD [†]	4'H x 4'W	24 lbs
303XG [†]	4'H x 6'W	36 lbs
303XH [†]	4'H x 8'W	48 lbs
303XK	4'H x 10'W	60 lbs
303XM	4'H x 12'W	72 lbs

Product Dim.	Ship Wt.	
C. Natural Cork Roll		
4'H x 6'W	9 lbs	
4'H x 8'W	12 lbs	
4'H x 12'W	18 lbs	
4'H x 24'W	36 lbs	
4'H x 36'W	54 lbs	
4'H x 48'W	72 lbs	
4'H x 100'W	150 lbs	
	4'H x 6'W 4'H x 8'W 4'H x 12'W 4'H x 24'W 4'H x 36'W 4'H x 48'W	

Shipping weights are listed on a per item basis and may vary based on quantities ordered. †Billed at dimensional weight of 70 lbs due to box dimensions.

Natural Cork Technical Information

- Natural cork resurfacing offers excellent resiliency and tack holding properties.
 Available in a variety of panel material options.
- Natural cork layer consists of finely grained composition cork produced with .5mm granulated cork and a polyurethane binder.
- Add-Cork has a .13" thick layer of natural cork with a .44" thick layer of insulation board.
- Cork-Plate has a .25" thick layer of natural cork bonded to a .25" thick layer of MDF.



MooreCo | Balt | Best-Rite

2885 Lorraine Avenue | Temple, TX 76501 P. 800.749.2258 | F. 866.888-7483

www.moorecoinc.com