

JBC

The Soldering Co.



Wire Stripper Stations

Designed for thermal wire insulation stripping

Wire Stripper Stations

Our **WSS** and **WSB** Wire Stripper Stations are specially designed for stripping high-temperature wire insulations.

WSST Stand for WS140 / **WSBT** Stand for WS440
Sleep & Hibernation Modes automatically detect the tool in the stand and reduces the tip temperature.

The position of the tool holder is easily adjustable to suit your needs and **Cable Collector** is designed for perfect movement adaptation and to keep cables away from the working area.

WSU
High-Temperature Wire Stripper Station
Specially designed for stripping wire insulations made of thermostable materials such as Teflon*, Kapton*, silicone, rubber, etc.


It incorporates predetermined power levels for each type of material. In addition, it features a customized working mode.

CC1001
Cable Collector
Designed for a **perfect movement adaptation**, avoiding any undesired movement in the tool while performing your soldering job and keeping the troublesome cables away from the soldering area.

SCH
Cartridge Holder
A practical and **stable holder for cartridge storage** and suitable for the following cartridges:

C120, C210, C245, C250, C420, C470, **W140, W440**, and C560 Desoldering Tips.


WS140
High-Temperature Precision Wire Stripper Tweezers
WS140 works exclusively with the interchangeable **W140 Blade Cartridge Range** which includes different AWG sizes from **40 to 14 AWG (0.08 to 1.63 mm)** and reaches temperatures up to **800°C**.

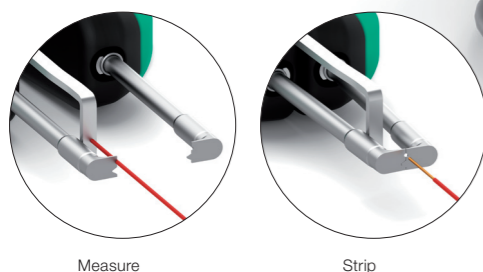

Measure

Strip

WS440
High-Temperature Wire Stripper Tweezers
WS440 works exclusively with the interchangeable **W440 Blade Cartridge Range** which includes different AWG sizes from **34 to 16 AWG (0.16 to 1.29 mm)** and reaches temperatures up to **800 °C**.

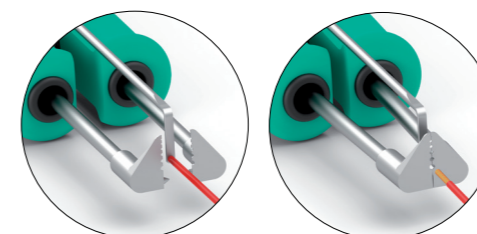

Measure

Strip

Insulation Materials

POLYVINYL CHLORIDE
Symbol: PVC
Power Level: 6%
Thermoplastic

POLYETHYLENE
Symbol: PE
Power Level: 7%
Thermoplastic

NYLON®¹
Symbol: PA
Power Level: 10%
Thermoplastic

KNAR®²
Symbol: PVDF
Power Level: 16%
Thermoplastic

TEFZEL®¹
Symbol: ETFE
Power Level: 17%
Thermoplastic

TEFLON®¹
Symbol: FEP / PFA / PTFE
Power Level: 16% / 21% / 40%
Thermostable

ETHYLENE PROPYLENE/ RUBBER
Symbol: EPM/EPR
Power Level: 44%
Thermostable

SILICONE RUBBER
Symbol: SI
Power Level: 51%
Thermostable

KAPTON®¹
Symbol: PI
Power Level: 90%
Thermostable

¹ Registered Trade Marks of DuPont

² Registered Trade Marks of Arkema

Specifications

Ref. - Voltage (AC) / Fuse	WSS-9A - 100V 50/60Hz.	Max. Temperature	800 °C / 1472 °F
	WSS-1A - 120V 50/60Hz.	Output Peak Power	75 W
	WSS-2A - 230V 50/60Hz.	Operating temp. range	10 to 50 °C / 50 to 120 °F
	WSB-9A - 100V 50/60Hz.	Connections	USB-B
	WSB-1A - 120V 50/60Hz.		
	WSB-2A - 230V 50/60Hz.		

Complies with CE standards. ESD Protected.

W140 Blade Cartridge Range for WS140 Precision Tweezers

Cartridge Ref.	Tip Hole	AWG Solid	AWG Stranded						
W14040G	Ø 0.08 mm / 0.0031 in	40	-						
W14038G	Ø 0.10 mm / 0.0039 in	38	-						
W14037G	Ø 0.11 mm / 0.0043 in	37	-						
W14036G	Ø 0.13 mm / 0.0051 in	36	-						
W14034G	Ø 0.16 mm / 0.0063 in	34	36 (7 x 44)						
W14032G	Ø 0.20 mm / 0.0079 in	32	34 (7 x 42)						
W14030G	Ø 0.25 mm / 0.0098 in	30	32 (19 x 44)						
W14028G	Ø 0.32 mm / 0.0126 in	28	30 (7 x 38)						
			30 (19 x 42)						
W14026G	Ø 0.40 mm / 0.0157 in	26	28 (19 x 40)						
			27 (7 x 35)						
W14024G	Ø 0.51 mm / 0.0201 in	24	26 (19 x 38)						
			26 (10 x 36)						
W14022G	Ø 0.64 mm / 0.0252 in	22	24 (19 x 36)						
			24 (7 x 32)						
W14020G	Ø 0.81 mm / 0.0319 in	20	22 (19 x 34)						
			20 (42 x 36)						
			20 (19 x 32)						
W14018G	Ø 1.02 mm / 0.0402 in	18	20 (7 x 28)						
W14016G	Ø 1.29 mm / 0.0508 in	16	18 (19 x 30)						
			16 (7 x 24)						
W14014G	Ø 1.63 mm / 0.0642 in	14							
W14003F	Flat Blade: Ø 3 mm / 0.118 in	-	-						
				W14005F			Flat Blade: Ø 5 mm / 0.197 in	-	-
W14003F	Flat Blade: Ø 3 mm / 0.118 in	-	-						
				W14005F			Flat Blade: Ø 5 mm / 0.197 in	-	-
W14012F	Flat Blade: Ø 12 mm / 0.472 in	-	-						

W440 Blade Cartridge Range for WS440 Tweezers

Cartridge Ref.	Tip Hole	AWG Solid	AWG Stranded					
W440021	Ø 0.16 mm / 0.0063 in	34	36 (7x44)					
	Ø 0.25 mm / 0.0098 in	30	32 (19 x 44)					
	Ø 0.32 mm / 0.0126 in	28	30 (7 x 38)					
			30 (19 x 42)					
	Ø 0.40 mm / 0.0157 in	26	28 (19 x 40)					
	Ø 0.51 mm / 0.0201 in	24	27 (7 x 35)					
			26 (19 x 38)					
Ø 0.64 mm / 0.0252 in	22	26 (10 x 36)						
W440023	Ø 0.4 mm / 0.0157 in	26	24 (19 x 36)					
	Ø 0.51 mm / 0.0201 in	24	27 (7 x 35)					
			26 (19 x 38)					
	Ø 0.64 mm / 0.0252 in	22	26 (10 x 36)					
	Ø 0.81 mm / 0.0319 in	20	24 (19 x 36)					
			24 (7 x 32)					
	Ø 1.02 mm / 0.0508 in	18	22 (19 x 34)					
Ø 1.29 mm / 0.0508 in	16	20 (42 x 36)						
		20 (19 x 32)						
W440025	Flat Blade: 12.5 mm / 0.4921 in	-	-					
					W440023	Flat Blade: 12.5 mm / 0.4921 in	-	-

