


Autoranging Characteristics

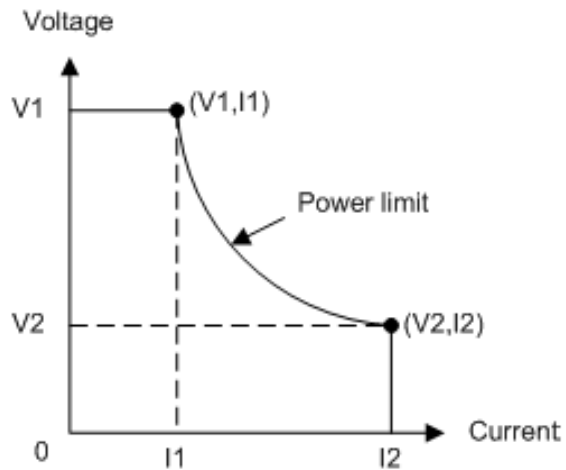

5 kW Models	N8920A N8940A	N8921A N8941A	N8923A N8943A	N8924A N8944A
V1	80 V	200 V	500 V	750 V
I1	62.5 A	25 A	10 A	6.667 A
V2	29.4 V	71.43 V	166.67 V	250 V
I2	170 A	70 A	30 A	20 A

10 kW Models	N8925A N8945A	N8926A N8946A	N8928A N8948A	N8929A N8949A	N8930A N8950A
V1	80 V	200 V	500 V	750 V	1000 V
I1	125 A	50 A	20 A	13.33 A	10 A
V2	29.4 V	71.43 V	166.67 V	250 V	333.33 V
I2	340 A	140 A	60 A	40 A	30 A

15 kW Models	N8931A N8951A	N8932A N8952A	N8934A N8954A	N8935A N8955A	N8937A N8937APV N8957A N8957APV
V1	80 V	200 V	500 V	750 V	1500 V
I1	187.5 A	75 A	30 A	20 A	10 A
V2	29.4 V	71.43 V	166.67 V	250 V	500 V
I2	510 A	210 A	90 A	60 A	30 A