


		P404	P484	P554
LCD MODULE				
Panel Technology		SPVA	SPVA	S-IPS
Viewable Image Size		40"	48"	55"
Native Resolution		1920 x 1080		
Brightness (Typical/Minimum)		550 cd/m ² / 700 cd/m ²		
Contrast Ratio (Typical)		4000:1		1200:1
Viewing Angle		178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10		
Aspect Ratio		16:9		
Displayable Colors		Over 1.07 Billion		
Orientation		Landscape and Portrait		
Panel Haze (%)		25		44
CONNECTIVITY				
Input Terminals	Digital	HDMI 2.0 x2 (with HDCP), DVI-D (with HDCP), DisplayPort x2 (with HDCP)		
	Analog	VGA 15-pin D-SUB, RCA Composite		
	Audio	3.5mm Audio Mini Jack x2, DisplayPort Audio x2, HDMI Audio x3		
	External Control	LAN (100Mbit), 3.5 Mini Jack IR Remote, RS232C		
	Data	microSD (Media Player), USB 2.0 (Media Player), USB 2.0 (Service), USB Type-B (Upstream), USB 2.0 x2 (Compute Module, Powered 5V/2A)		
Output Terminals	Digital	DisplayPort (Outputs DisplayPort)		
	Audio	3.5mm Audio Mini Jack		
	External Control	LAN (100Mb)		
POWER CONSUMPTION				
On (Typ/Max)		92W/115W	115W/140W	125W/175W
Network Standby		3W		
Normal Standby		<0.5W		
Current Rating		2.9A - 1.2A @ 100V - 240V	3.1A - 1.2A @ 100V - 240V	3.6A - 1.5A @ 100V - 240V
Speaker Rating		Integrated 10W x 10W, Optional 15W x 3		
PHYSICAL SPECIFICATIONS				
Bezel Width (L/R, T/B)		13.2mm/13.2mm/ 13.2mm/13.2mm	13.2mm/13.2mm/ 13.2mm/13.2mm	14.2mm/14.2mm/ 14.2mm/14.2mm
Net Dimensions (Without stand; W x H x D)		36.1 x 20.9 x 2.2 in. 918.0 x 530.6 x 54.7mm	42.8 x 24.6 x 2.2 in. 1086.5 x 625.3 x 54.7mm	49.0 x 28.1 x 2.5 in. 1244.0 x 714.8 x 62.9mm
Net Weight (Without Stand)		31.5lbs / 14.3kg	38.8lbs / 17.6kg	54.2lbs / 24.6kg
VESA Hole Configuration		4x M6 x 12mm (300 x 300)		
SENSORS				
Ambient Light Sensor		Integrated and programmable		
Human Sensor		Optional through KT-RC2 Accessory		
Temperature Sensor		Integrated and programmable; linked to cooling fans		
NFC Sensor		Integrated; works in conjunction with free NEC Intelligent Wireless Data Application		
ENVIRONMENTAL CONDITIONS				
Operating Temperature		0 to 40C		
Operating Humidity		20-80%		
Operating Altitude		3000m (9843ft)		
LIMITED WARRANTY		5 years Advanced Replacement		
ADDITIONAL FEATURES		Ambient Light Sensor, AMX Support, Auto ID/Auto TileMatrix, Automated Email Alert Function, CEC Support through HDMI, Crestron Roomview Support, DICOM Simulation, Display Browser Control, Display Wall Calibrator Compatible, Factory Uniformity Correction, High Haze Panel, Image Flip, Intelligent Wireless Data (NFC), Key Guide, Media Player through Browser Control/SD Card/USB, Multi Picture Mode, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, OPS Compatible, PJ Link Support, Point Zoom Function, Power USB Port (5V/2A), Programmable LUT x3, Raspberry Pi Compute Module Compatible, Removeable Logo Ornament, Real Time Clock, SpectraView Engine Support, SNMP Support (with Uniformity Control), 24-Hour Scheduler Function, UHD Support through HDMI/DisplayPort		
SHIPS WITH		3m AC Power Cord, 1.8m DVI Cable, IR Remote Control, Batteries, CD-ROM (User Manual)		
OPTIONAL ACCESSORIES		Table Top Stand (ST-401), Optional Speakers (SP-TF1), All OPS Option Cards, NEC Raspberry Pi Compute Module (RP3CM16GB) with optional Compute Module Interface Board (DS1-IF10CE), Wall Mount (WMK-3257), Slim Wall Mount (WMK-3255S), Human Sensor (KT-RC2)		

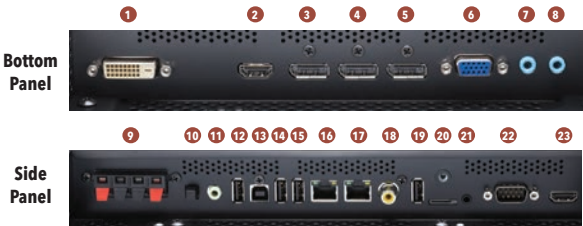

MultiSync, NaViSet and TileMatrix are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries.

HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.

CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc.

AMX is a trademark or registered trademark of AMX in the United States and other countries.


VESA is a trademark of a nonprofit organization, Video Electronics Standard Association.

All other trademarks are the property of their respective owners. The images in this brochure are samples.

All specifications are subject to change without notice.

©2019 NEC Display Solutions of America, Inc. and the NEC logo are registered trademarks of NEC.

Dimensions

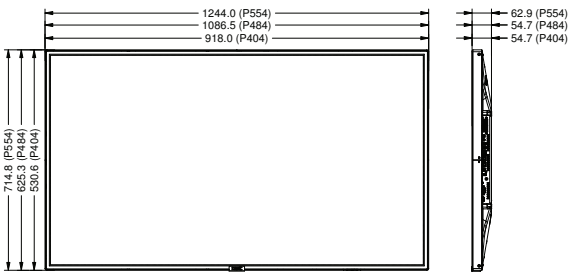

Options

OPS PC's

OPS-APIC-PS

OPS-PCIB-PS

OPS-TCIS-PS

OPS-PCAEQ-PS

OPS-APIS-PS



SDI

HD-SDI

3G-SDI

SB-01HC

SB-04HC



HDBaseT

SB-07BC



Compute Module

Compute Module Interface Board

NEC Raspberry Pi Compute Module

DS1-IF10CE

RP3CM16GB




Tabletop Stand

ST-401

Speaker

SP-TF1

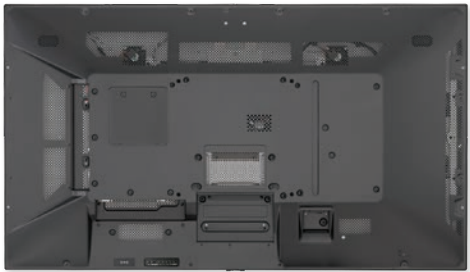

Input Panels

- DVI-D
- HDMI IN2
- DisplayPort IN2
- DisplayPort IN1
- DisplayPort OUT
- VGA (RGB, YPbPr)
- Audio IN1
- Audio IN2
- External Speaker Terminal
- Internal/External Speaker Switch
- Audio OUT
- USB1
- USB2
- USB CM1 (2A)
- USB CM2
- LAN1
- LAN2
- VIDEO IN
- USB MP
- microSD
- REMOTE IN
- RS-232C
- HDMI IN1

