


IN CEILING SPEAKERS

Constellation series

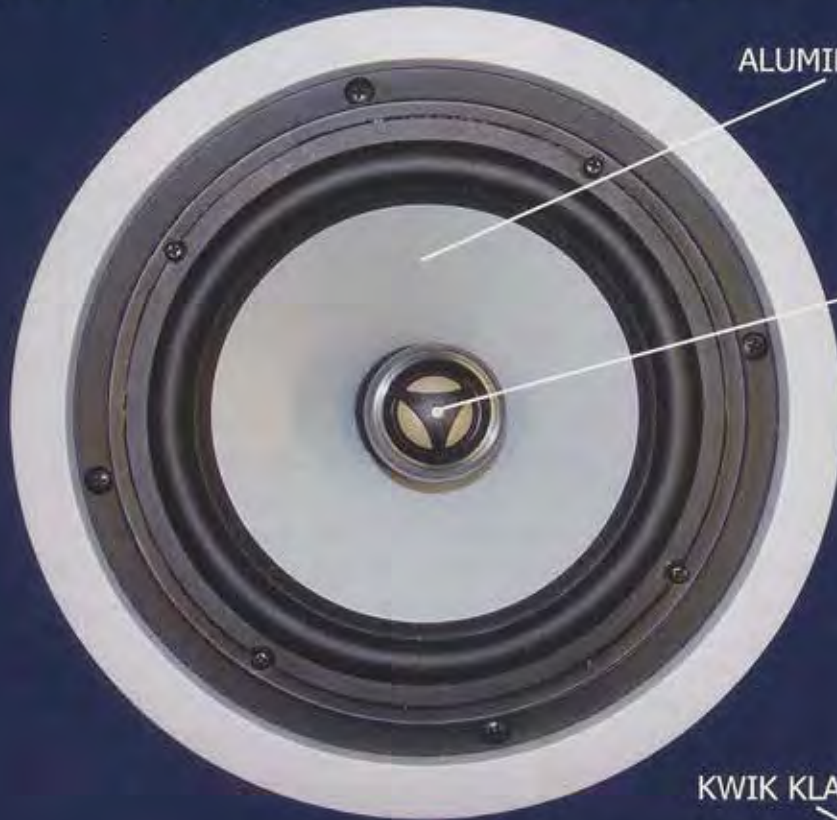

ALUMINUM WOOFER

SWIVEL CERAMIC
DOME TWEETER

ICT 62A -6" SPEAKER

ICT SERIES PC BOARD


KWIK KLAMPS

+/- 3 dB SWITCH

SELF RESET FUSE

PUSH BUTTON CONNECTION

- ELEGANT STYLE
- FAST SIMPLE INSTALLATION
- LUXURIOUS SOUND
- ALUMINUM GRILL
- SWIVEL TWEETER
- PAINTABLE

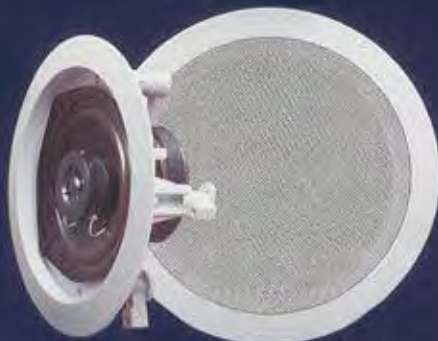

IC5 - 5.25" WOOFER
IC6 - 6.5" WOOFER



IC6 DVC - 6.5" WOOFER
DUAL VOICE COIL



OWI Incorporated
17141 Kingsview Avenue
Carson, CA 90745-1207 USA
Tel 310.515.1900
WWW.OWI-INC.COM

EST. 1978

IN-CEILING: CONSTELLATION SERIES

ARCHITECTS AND ENGINEERS
SPECIFICATION / TECHNICAL DATA



GENERAL SPECIFICATIONS:

| MODEL NUMBER: | ICT-62A | IC-5 | IC-6 | IC6-DVC |
|--------------------------|--|--------------------------------|-------------------------------|--|
| COVERED OUTDOOR: | YES | YES | YES | NO |
| DESCRIPTION: | 6.5", 2-Way Co-Axial with Swivel Tweeter | 5" 2-Way Co-Axial Speaker | 6.5" 2-Way Co-Axial Speaker | 6.5" Dual Voice Coil w/ Twin Tweeters |
| IMPEDANCE: | 8 Ohms | 8 Ohms | 8 Ohms | 8 Ohms |
| SENSITIVITY(1W/1M): | 88 dB | 85 dB | 86 dB | 87 dB |
| MAX POWER: | 150 Watts | 40 Watts | 50 Watts | 60 Watts |
| NOMINAL POWER: | 100 Watts | 20 Watts | 25 Watts | 30 Watts |
| FREQUENCY RESPONSE: | 50 Hz - 20 kHz | 80 Hz - 20 kHz | 65 Hz - 20 kHz | 60 Hz - 20 kHz |
| CROSS OVER: | 4 kHz | | | 2.5 kHz |
| HIGH FREQUENCY DRIVER: | 1" (25 mm) Swivel Soft Dome | .5" PEI | .5" PEI | Twin .5" (13 mm) Hard Dome Tweeter |
| LOW FREQUENCY DRIVER: | 6.5" (165 mm) Aluminum/Rubber | 5.25" (133 mm) Paper PP Coated | 6.5" (165 mm) Paper PP Coated | 6.5" (165 mm) Poly Carbonate Rubber Surround |
| WOOFER SIZE: | 6.5" (165 mm) | 5.25" (133 mm) | 6.5" (165 mm) | 6.5" (165 mm) |
| WOOFER MATERIAL: | Aluminum/Rubber | Paper PP Coated | Paper PP Coated | Poly Carbonate Rubber Surround |
| TWEETER/S: | 1 Each | 1 Each | 1 Each | 2 Each |
| TWEETER SIZE: | 1" (25 mm) Swivel | .5" (13 mm) | .5" (13 mm) | .5" (13 mm) |
| TWEETER MATERIAL: | Ceramic | PEI | PEI | Poly Carbonate |
| TWEETER PROTECTION FUSE: | YES | NO | NO | NO |
| TWEETER CONTROLS: | +/- 3 dB Switch | NO | NO | NO |
| GRILL MATERIAL: | Aluminum | Aluminum | Aluminum | Aluminum |
| CUT OUT SIZE: | 7 ^{5/8} " (194 mm) | 6 ^{5/8} " (168 mm) | 7 ^{11/16} " (195 mm) | 7 ^{3/4} " (197 mm) |
| DEPTH: | 2 ^{15/16} " (75 mm) | 3 ^{1/8} " (80 mm) | 3 ^{1/2} " (88 mm) | 4" (102 mm) |
| OVERALL SIZE: | 9" (228 mm) | 7.95" (202 mm) | 8 ^{5/16} " (227 mm) | 9 ^{1/8} " (232 mm) |
| PAINTABLE: | YES | YES | YES | YES |



OWI Incorporated

17141 Kingsview Avenue
Carson, California 90746

Tel: (310) 515 1900 • Toll Free: (800) 638 1694 • Fax: (310) 515 1606

E-mail: info@owi-inc.com • Website: www.owi-inc.com