



SCIOLOGEX


SCIOLOGEX  
1275 Cromwell Avenue  
Suite C6  
Rocky Hill, CT 06067 USA  
SCIOLOGEX.COM



THERMO CONTROL



CENTRIFUGES

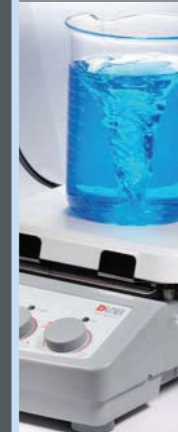

DISTILLING & MIXING



LIQUID HANDLING

# Company Profile

SCIOGEX is a brand of innovative and unique laboratory products for all areas of research. Every product has been carefully selected for quality and priced to meet your budget so your lab can operate at its highest level of efficiency. Our goal is to provide great products, great prices and great service.

SCIOGEX Liquid Handling Products and Bench-top Instruments are available through our authorized distributor network. To locate a distributor in your area, please contact us. Our knowledgeable staff will be delighted to provide you with pre-purchase support and product recommendations.

Our Liquid Handling Products come with a 1 year warranty and our Bench-top Instruments come with a 2 year warranty and are manufactured in an ISO9001 facility and cTUVus certified for UL & CSA so you can purchase in confidence.

Please visit our New Products page to keep up to date with new and exciting products and our Promotions page for the latest great deals we are offer.

We thank you for your continued support and we look forward to bringing you new and exciting products at VERY competitive prices.



# Contents

## Liquid Handling

# 2

- Electronic Pipettes / 3 - 4
- Mechanical Pipettes / 5 - 10
- Pipette Fillers / 11 - 12
- Pipette Controllers & Pumps / 13
- Repeat Pipetter / 14 - 15
- Bottle-Top Dispensers / 16
- Electronic Bottle-Top Dispenser / 17
- Bottle-Top Dispensers / 18 - 19
- Vacuum Aspiration System / 20



## Thermal Control

# 21

- Thermal Cyclers / 22 - 23
- Dry Baths / 24 - 25
- Thermal Mixers / 26 - 27

## Heating & Mixing

# 28

- Rotary Evaporators / 29 - 37
- Hotplates / Stirrers / 38 - 50
- Overhead Stirrers / 51 - 53
- Vortex Mixers / 54 - 55
- Microplate Mixers / 56
- Tube Rotators / 57 - 59
- Tube Rollers / 60
- Shakers / 61 - 66
- Rockers / 67 - 70
- Homogenizers / 71 - 72



## Centrifuges & Miscellaneous

# 73

- Mini Centrifuges / 74 - 75
- High Speed Microcentrifuges / 76 - 82
- Hematocrit Centrifuges / 83 - 84
- Low-speed Centrifuges / 85 - 87
- Multi-Purpose Centrifuge / 88 - 91
- Spectrophotometers / 92 - 94
- Gel Documentation / 95 - 96
- Cryogenic Dewar Flasks / 97 - 98
- Dry-Ice Maker / 99

SCIOLOGEX products are manufactured in accordance with ISO9001 and ISO13485. All products comply with EU and North America standards, CE, cTUVus, FCC marked and subjected to the strict QC control.

SCIOLOGEX instruments are tested and conform to the following safety and EMC standards:

EN 61010-1 UL 3101-1 CAN/CSA C22.2(1010-1)

EN 61010-2-10 EN 61326-1 EMC-guidelines: 89/336/EWG Instrument guidelines: 73/023/EWG

# Liquid Handling



## iPette+ Multifunction Electronic Pipettors

### Features

- High accuracy, high performance stepper motor ensures accuracy and repeatability, eliminating manual pipetting errors
- A motor driven digital control pipette with multifunction
- 2 buttons handle all operational settings
- Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting
- Pipetting, Mixing, Stepper and Dilution(Only dPette+)
- Pipetting, Mixing(dPette)
- Adjustable speeds for aspiration and dispensing
- Li-ion battery and dual charging modes enable longer operation time
- Self calibration – dPette can be connected to a PC via. USB for calibration by the user. Third party calibration is not required



### Specifications

Channels	Volume Range	Increment	Test Volume	Error limits in accordance to ISO8655-2			
				accuracy error		precision error	
				µL	%	s.d.*µL	CV%*
1	0.5-10	0.01	10	±0.10	±1.00	0.05	0.50
			1	±0.035	±3.50	0.03	3.00
1	5-50	0.1	50	±0.40	±0.80	0.15	0.30
			5	±0.15	±3.00	0.125	2.50
1	30-300	1	300	±1.80	±0.60	0.60	0.20
			30	±0.90	±3.00	0.21	0.70
1	100-1000	5	1000	±6.00	±0.60	2.00	0.20
			100	±3.00	±3.00	0.60	0.60

\* s.d. = Standard Deviation

\*CV = Coefficient of Variation

# iPette Electronic Pipettor

iPette is an innovative electronic pipette developed by SCILOGEX. It combines the features of manual pipette and ergonomic and lightweight.



## MicroPette plus

121°C  
FULLY  
Autoclavable

### Features

- Fully autoclavable
- Ergonomic design provides excellent operating experience
- Easy-to-read volume display
- The pipettes cover the volume range from 0.1µL to 5mL
- Easy calibration and maintenance
- Manufactured from innovative materials
- Each MicroPette Plus supplied with an individual calibration certificate according to ISO8655
- Online calibration is available



## MicroPette plus multi-channel


121°C  
FULLY  
Autoclavable

### Features

- Dispensing head rotates for effortless pipetting convenience
- Individual piston and tip cone assembly allow for easy repair and maintenance
- Compound material-made tip cone secures high sealing performance
- Compatible with most universal tip brands
- Online calibration is available





# Mechanical Pipettes

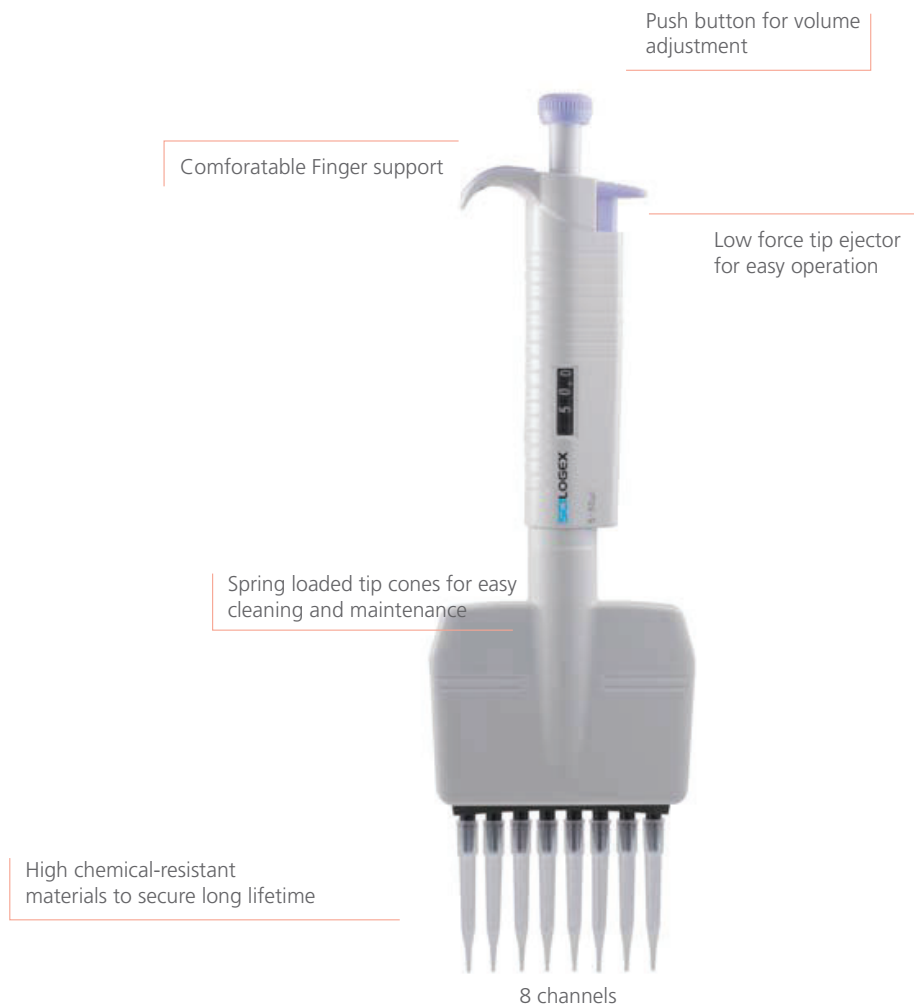

## Fully autoclavable

The MicroPette Plus pipettes are fully autoclavable, enable easy cleaning and reduce the risk of contamination. Steam autoclaving can be performed at 121°C, 1 bar for 20 minutes. After autoclaving, the pipette must be cooled down and left to dry for 12 hours before use.

It is recommended to check the performance of the pipette after each autoclaving. Greasing and sealing of the pipette piston after every 10th autoclaving will secure an enhanced function.

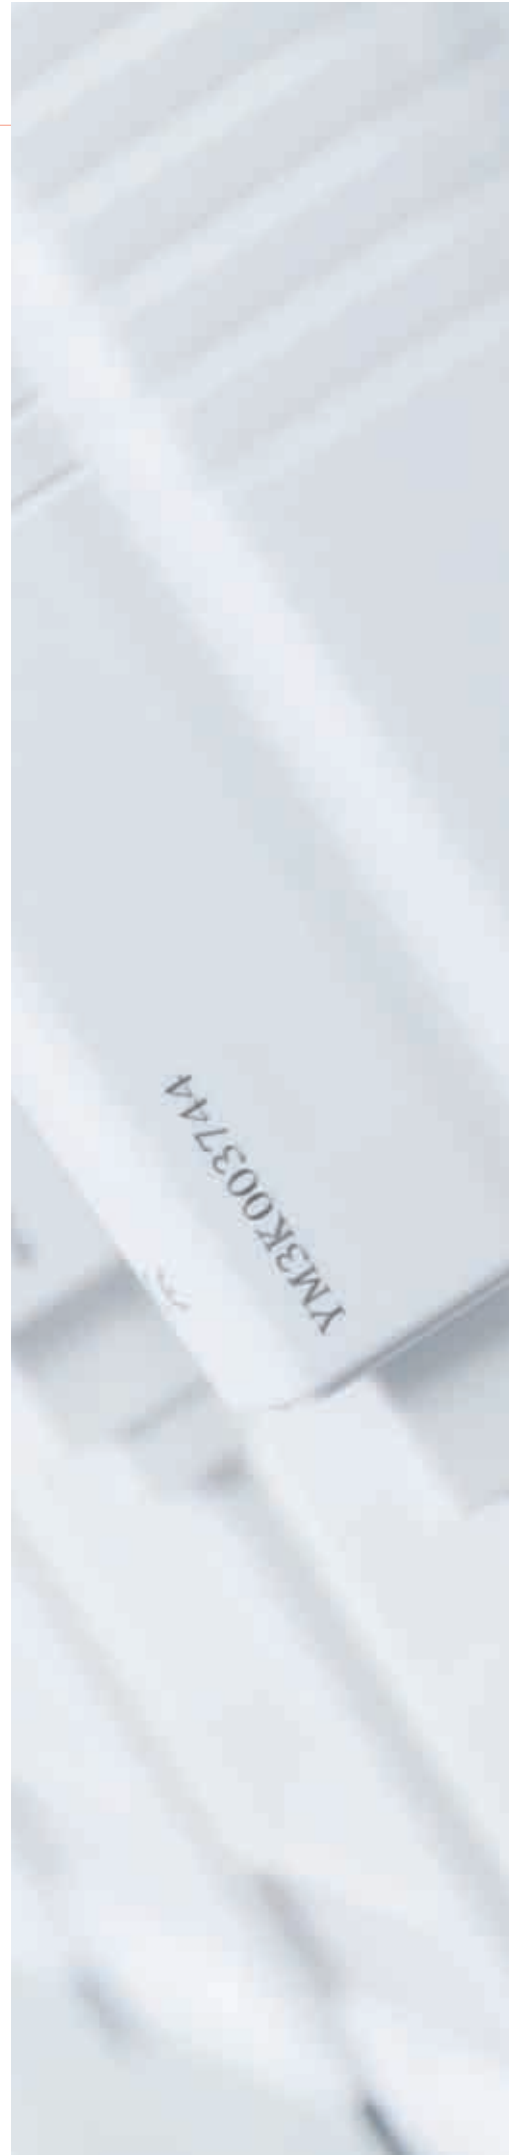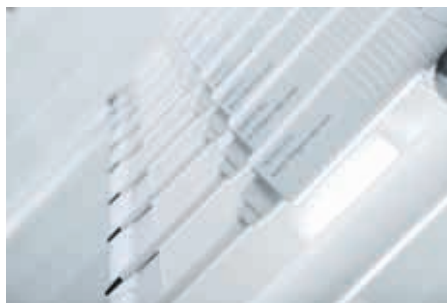



# Mechanical Pipettes

## MicroPette

### Features

- Pipettes cover a volume range from 0.1 µL to 10 mL
- Ergonomic design provides excellent operating experience
- Large display window allows for easy volume identification
- Easy calibration and maintenance
- Each MicroPette supplied with an individual calibration certificate according to ISO8655
- Online calibration is available

121°C  
HALF  
Autoclavable



## MicroPette multi-channel

### Features

- 8 and 12 channel pipettes are appropriate for 96 well plates
- Dispensing head rotates for effortless pipetting convenience
- Individual piston and tip cone assemblies allowing easy repair and maintenance
- Compound material-made tip cone secures high sealing performance
- Compatible with most universal tip brands
- Online calibration is available

121°C  
HALF  
Autoclavable



# Mechanical Pipettes



## Calibration

All SCILOGEX pipettes have been quality tested according to ISO8655-2:2002 and are supplied with individual calibration certificates. The quality control includes gravimetric testing of each pipette with distilled water at 22°C

# Mechanical Pipette Volume Selection

## Specifications

This list is appropriate for MicroPette and MicroPette plus (Adjustable and Fixed volume)

### Single-channel Adjustable Volume Pipettes

Volume Range	Increment	Test Volume	Error limits in accordance with ISO8655-2			
			(Accuracy error)		(Precision error)	
			%	µL	%	µL
0.1-2.5µL	0.05µL	2.5µL	2.50%	0.0625	2.00%	0.05
		1.25µL	3.00%	0.0375	3.00%	0.0375
		0.25µL	12.00%	0.03	6.00%	0.015
0.5-10µL	0.1µL	10µL	1.00%	0.1	0.80%	0.08
		5µL	1.50%	0.075	1.50%	0.075
		1µL	2.50%	0.025	1.50%	0.015
2-20µL	0.5µL	20µL	0.90%	0.18	0.40%	0.08
		10µL	1.20%	0.12	1.00%	0.1
		2µL	3.00%	0.06	2.00%	0.04
5-50µL	0.5µL	50µL	0.60%	0.3	0.30%	0.15
		25µL	0.90%	0.225	0.60%	0.15
		5µL	2.00%	0.1	2.00%	0.1
10-100µL	1µL	100µL	0.80%	0.8	0.15%	0.15
		50µL	1.00%	0.5	0.40%	0.2
		10µL	3.00%	0.3	1.50%	0.15
20-200µL	1µL	200µL	0.60%	1.2	0.15%	0.3
		100µL	0.80%	0.8	0.30%	0.3
		20µL	3.00%	0.6	1.00%	0.2
50-200µL	1µL	200µL	0.60%	1.2	0.15%	0.3
		100µL	0.80%	0.8	0.30%	0.3
		50µL	1.00%	0.5	0.40%	0.2
100-1000µL	5µL	1000µL	0.60%	6	0.20%	2
		500µL	0.70%	3.5	0.25%	1.25
		100µL	2.00%	2	0.70%	0.7
200-1000µL	5µL	1000µL	0.60%	6	0.20%	2
		500µL	0.70%	3.5	0.25%	1.25
		200µL	0.90%	1.8	0.30%	0.6
1000-5000µL	50µL	5000µL	0.50%	25	0.15%	7.5
		2500µL	0.60%	15	0.30%	7.5
		1000µL	0.70%	7	0.30%	3
2-10mL	0.1mL	10mL	0.60%	60	0.20%	20
		5mL	1.20%	60	0.30%	15
		2mL	3.00%	60	0.60%	12

# Mechanical Pipette Volume Selection

## 8-channel Adjustable Volume Pipettes

Volume Range	Increment	Test Volume	Error limits in accordance with ISO8655-2			
			(Accuracy error)		(Precision error)	
			%	µL	%	µL
0.5-10µL	0.1µL	10µL	1.50%	0.15	1.50%	0.15
		5µL	2.50%	0.125	2.50%	0.125
		1µL	4.00%	0.04	4.00%	0.04
5-50µL	0.5µL	50µL	1.00%	0.5	0.50%	0.25
		25µL	1.50%	0.375	1.00%	0.25
		5µL	3.00%	0.15	2.00%	0.1
50-300µL	5µL	300µL	0.70%	2.1	0.25%	0.75
		150µL	1.00%	1.5	0.50%	0.75
		50µL	1.50%	0.75	0.80%	0.4

## 12-channel Adjustable Volume Pipettes

Volume Range	Increment	Test Volume	Error limits in accordance with ISO8655-2			
			(Accuracy error)		(Precision error)	
			%	µL	%	µL
0.5-10µL	0.1µL	10µL	1.50%	0.15	1.50%	0.15
		5µL	2.50%	0.125	2.50%	0.125
		1µL	4.00%	0.04	4.00%	0.04
5-50µL	0.5µL	50µL	1.00%	0.5	0.50%	0.25
		25µL	1.50%	0.375	1.00%	0.25
		5µL	3.00%	0.15	2.00%	0.1
50-300µL	5µL	300µL	0.70%	2.1	0.25%	0.75
		150µL	1.00%	1.5	0.50%	0.75
		50µL	1.50%	0.75	0.80%	0.4

## Fixed Volume Pipettes

Volume Range	Increment	Test Volume	Error limits in accordance with ISO8655-2			
			(Accuracy error)		(Precision error)	
			%	µL	%	µL
5µL	-	5µL	1.3%	0.065	1.2%	0.06
10µL	-	10µL	0.8%	0.08	0.8%	0.08
20µL	-	20µL	0.6%	0.12	0.5%	0.1
25µL	-	25µL	0.5%	0.125	0.3%	0.075
50µL	-	50µL	0.5%	0.25	0.3%	0.15
100µL	-	100µL	0.5%	0.5	0.3%	0.3
200µL	-	200µL	0.4%	0.8	0.2%	0.4
250µL	-	250µL	0.4%	1.0	0.2%	0.5
500µL	-	500µL	0.3%	1.5	0.2%	1.0
1000µL	-	1000µL	0.3%	3.0	0.2%	2.0
2000µL	-	2000µL	0.3%	6.0	0.15%	3.0
5000µL	-	5000µL	0.3%	15	0.15%	7.5

## SCI-Filler

### Motorized Pipette Filler

#### Features

- Compatible with most of the plastic and glass pipettes from 0.1 -100mL
- Eight speeds of selection for aspiration and dispensing different liquids
- Large LED display showing low battery warning and speed settings
- Enables single-handed operation with minimum effort
- Light and ergonomic design providing easy usability
- High capacity Li-ion battery enable long runtime of operation
- Powerful pump fills a 25mL pipette in <5 seconds
- 0.45µm replaceable hydrophobic filter
- Rechargeable during use

Large LED display showing low battery warning and speed settings

Select the desired coarse speed by pressing the button +/-



Aspiration and dispensing operation buttons

Operating button for motor and gravity dispensing



Hydrophobic filter 0.45µm

Silicone adapter for 0.1-100mL



#### Specifications

Aspiration Speed	25mL<7s (8 shift)
Dispensing Speed	Motor (8 shift)/Gravity
Battery	Lithium-ion
Battery Service Life	More than 8 Hours of Intermittence Use
Charging Time	2-3 Hours
Pipette Types	Glass or Plastic Pipette (0.1-100mL), Pasteur Pipettes
Filter	0.45µm Hydrophobic
Weight	200g

# Pipette Filler

## SCI-Filler2

### Motorized Pipette Filler

SCI-Filler pipette filler has an excellent comfortable and ergonomic design, suitable for almost all commonly used glass or plastic serological pipettes.

#### Features

- Enables single-handed operation with minimum effort
- Compatible with most of the plastic and glass pipettes from 0.1-100mL
- Easily adjustable speed control
- 0.45µm replaceable hydrophobic filter
- Stable and reliable performance, elegant appearance
- High capacity Li-ion battery enable long operation time.



#### Specifications

Aspiration Speed	25ml<7s
Dispensing Speed	Motor/Gravity
Battery	Lithium-ion
Battery Service Life	More than 8 Hours of Intermittence Use
Charging Time	2-3 Hours
Pipette Types	Glass or Plastic Pipette (0.1-100mL), Pasteur Pipettes
Filter	0.45µm Hydrophobic
Weight	200g

# Pipette Controllers & Pumps

## SCI-Pet

### Pipette Controller

#### Features

- Ease of use
- Precise pipetting control
- Robust and light weight
- Compatible with most of the plastic and glass pipettes from 0.1 -100mL
- 3µm replaceable hydrophobic filter
- Easy cleaning and maintenance



Compress the suction bellows before attaching the pipette

Button to expel residual liquid when using blow-out pipette

Aspiration and dispensing comfortably achieved with a sensitive lever

## Levo E

### Pipette Pump

#### Features

- Volume capacity 2mL, 10mL and 25mL
- Colour-coded by volume with green, blue and red
- Thumb wheel guarantees precise operation
- Resistant to acids and alkalis
- Easy for cleaning and maintenance



3µm replaceable Hydrophobic filter

Silicone adapter for 0.1-100mL pipette tip, fully autoclavable



Designed for single-handed operation, Pipette Pump identifies itself with a thumbwheel, allowing precise aspiration or dispensing. The feature of side lever enables complete liquid dispensing, without a droplet remaining.

# Repeat Pipettor

Based on the principle of positive displacement, **SCI-Mate Stepper** is designed for trouble-free and reliable dispensing of liquids, especially for high viscosity, high density and high vapor pressure. The 48-step dispensing allows for enhanced accuracy and usability.

## SCI-Mate Repeat Pipettor

### Features

- Light and ergonomic solution provides easy usability
- Single-handed operation
- Volume range from 10µL to 5mL
- Up to 48 dispensing steps
- Maintenance free
- Equipped with durable tip
- insertion lever
- Fits seven sizes of disposable polypropylene syringes from 0.5mL to 50mL

### How to select dispensing volume

Find the required dispensing volume in the table  
 Use the adjusting wheel to set the required volume  
 Select and insert a suitable tip  
 Follow the maximum dispensing steps

Tips \ Sel	1	2	3	4	5
0.50ml	10µl	20µl	30µl	40µl	50µl
1.25ml	25µl	50µl	75µl	100µl	125µl
2.50ml	50µl	100µl	150µl	200µl	250µl
5.00ml	100µl	200µl	300µl	400µl	500µl
12.50ml	250µl	500µl	750µl	1000µl	1250µl
25.00ml	500µl	1000µl	1500µl	2000µl	2500µl
50.00ml	1000µl	2000µl	3000µl	4000µl	5000µl
Steps	48	23	15	11	8

Tip volume

Dispensing Volume

Steps

Optimized for smooth dispensing of even the smallest volumes

Five easy-to-select settings control dispensing volume

By pushing the slide upwards, the syringe is filled

The stop lever secures the syringe







SCIOGEX repeater pipette tips are particularly suitable for dispensing of fluids with high viscosity, high vapor pressure etc. Tips are made from high-quality materials (Cylinder: PP, Piston: PE-HD) without soft lubricants or other additives.



## Specifications

Note: The first and last dispensing liquid should be discarded for precision.

Dial setting		1	2	3	4	5			
Number of steps		48	23	15	11	8			
Cat. No.	Syringe volume (mL)	Sample volume (μL)					A %	P %	Description
17900032	0.50	10	20	30	40	50	± 0.8	≤ 0.7	0.5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900033	1.25	25	50	75	100	125	± 0.8	≤ 0.5	1.25mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900034	2.50	50	100	150	200	250	± 0.8	≤ 0.4	2.5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900035	5.00	100	200	300	400	500	± 0.4	≤ 0.3	5mL, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900036	12.50	250	500	750	1000	1250	± 0.3	≤ 0.3	12.5ml, piston PE-HD, cylinder PP, 1 packing, 5 pcs/packing
17900037	25.00	500	1000	1500	2000	2500	± 0.2	≤ 0.3	25mL, piston PE-HD, cylinder PP, 1 packing, 2pcs/packing with 1 pc adapter
17900038	50.00	1000	2000	3000	4000	5000	± 0.2	≤ 0.2	50mL, piston PE-HD, cylinder PP, 1 packing, 2pcs/packing with 1 pc adapter

# SCI-Spence2

## New Bottle-Top Dispensers

The SCI-Spence2 is a variable volume bottle-top dispenser available in five fully adjustable sizes. All models are fitted reagent recovery and anti-drip caps.

This model features a seamless, smooth action glass piston with strong chemical resistance which is easily removed for cleaning.

Reagent recovery into bottle while priming prevents waste

Anti-drip screw-cap

Telescopic liquid inlet tube to accommodate most reagent bottles sizes

Fast & accurate volume adjustment

Supplied with 6 adapters to fit most reagent bottles



### Features

- Excellent chemical resistance;
- Fully autoclavable at 121°C;
- Reagent recovery function reduces waste and prevents dripping when not in operation;
- Fast, reliable and reproducible volume locking mechanism;
- Easy to disassemble and clean, minimum maintenance;
- With 6 different adapters for reagent bottles of various sizes;
- For liquid with vapor pressure up to 500mbar, viscosity up to 500mm<sup>2</sup>/s, temperature up to 40°C, density up to 2.2g/cm<sup>3</sup>;
- Flexible filling tube adapts to reagent bottles of various sizes.

### Specifications

Volume Range mL	Graduation mL	A <sub>±</sub>		CV <sub>≤</sub>	
		%	μL	%	μL
0.5-5	0.1	0.5	25	0.2	10
1.0-10	0.2	0.5	50	0.2	20
2.5-25	0.5	0.5	125	0.2	50
5.0-50	1.0	0.5	250	0.2	100
10~100	2.0	0.5	500	0.2	200

### Accessories

Cat. No.	Description
17400135	S40, Adapter, 45/40mm
17400131	GL32, Adapter, 45/32mm
17400132	GL38, Adapter, 45/38mm
17400133	GL25, Adapter, 32/25mm
17400134	GL28, Adapter, 32/28mm
17400037	Reagent Bottle (Brown, 1L, Optional)
17900158	Filling tube
17000802	Discharge tube

# SCI-Spense Bottle-Top Dispensers

Easy-to-use volume adjustment

Smooth piston design provides effortless dispensing

Closure cap protects, against reagent contact and is easy to attach/detach, without taking gloves off.



6 Adapters allow fitting to standard reagent bottles

Filling tube adjusts easily for different size bottles



## Features

- Excellent chemical resistance, components are made of PTFE, FEP, BSG, PP
- Fully autoclavable at 121°C
- Four ranges of bottle-top dispenser covering a volume range from 0.5mL to 50mL
- Easy for cleaning and maintenance
- The optional flexible discharge tube with safety handle permits fast and precise dispensing
- Vapor pressure max. 500mbar, viscosity max. 500mm<sup>2</sup>/s,
- temperature max. 40°C, density max. 2.2g/cm<sup>3</sup>
- Dispensemate is supplied with S40, GL32, GL38, GL25, GL28 sized adapters

## Specifications

Cat. No.	Volume Range mL	Graduation mL	A±		CV≤	
			%	µL	%	µL
7032100001	0.5-5	0.1	0.5	25	0.2	10
7032100002	1.0-10	0.2	0.5	50	0.2	20
7032100003	2.5-25	0.5	0.5	125	0.2	50
7032100004	5.0-50	1.0	0.5	250	0.2	100

## Accessories

Cat. No.	Description
17100553	GL45, Adapter, 45mm
17000069	S40, Adapter, 45/40mm
17400131	GL32, Adapter, 45/32mm
17400132	GL38, Adapter, 45/38mm
17400133	GL25, Adapter, 32/25mm
17400134	GL28, Adapter, 32/28mm
17400037	Reagent Bottle (Brown, 1L, Optional)
17400021	Filling tube(m)
17100073	Discharge tube(m)

# iFlow

## Electronic Bottle-Top Dispenser

### Features

Motorized operation minimizes the grip force  
Electronic control decreases the repetitive strain injury  
Control panel prevents manual disturbance during operation  
Two Dispensing modes, dispense and multi-dispense function options 10ml piston capacity  
Ideal for small volume repeat dosing



### Specifications

VolumeRange	0.1-99.9mL, Max piston volume is 10mL, resolution is 100 $\mu$ L
Volume Accuracy	Dispenser: R = 10mL $\pm$ 30 $\mu$ L; CV = 10ml $\pm$ 10 $\mu$ L Stepper: R = 1mL $\pm$ 6 $\mu$ L; CV = 1ML $\pm$ 9 $\mu$ L
Operating Temperature Range	10°C-30°C
Quality Control	DIN EN ISO 8655
Contro Type	External control

# iTrite

## Electronic Burette

The iTrite Digital Burette provides accurate, precise and convenient bottle-top titration, as well as optimum operator safety. It combines both magnetic stirrer and titrator functions, making it easier for the operator to achieve satisfactory results in the field of analytical chemistry, food industry, water analysis etc.



### Features

- High quality motor providing excellent precision and accuracy
- Electronic control decreases the repetitive strain injury
- Remote control panel prevents manual disturbance during operation
- Built-in magnetic stirrer
- Meniscus free readings

### Specifications

Volume Range	0.01mL-99.99mL, Max piston lift is 10mL, resolution is 10µL
Volume Accuracy	R=0.2% CV=0.07%
Velocity	16 stages
Operating Temperature Range	10°C-30°C
Quality Control	DIN EN ISO 8655
Control Type	External control, including the stirrer and the burette program

# Vacuum Aspiration System

SCI-Vac is designed for laboratory waste recovery and separation of liquid and solid. It can be widely used in cell culture, DNA extraction, microplate waste removal, and any other liquid separation or recovery.

## SCI-Vac Vacuum Aspiration Systems

### Features

- Vacuum power can be set to different levels to achieve 1mL/S to 15mL/S aspiration speed
- Sensitive level sensor to prevent liquid overflow during operation
- Fully autoclavable waste collection bottle, tubing and handle
- Lid, tubing and handle are easy for disassembling, cleaning and autoclaving
- Wide range of adapters to fit tube, microplate and disk plate for various tasks
- Interchangeable hand operator -tip adapters make it suitable for various tasks from single channel to 8-channel based on the applications in tube, micro plate, disk plate etc.


### Specifications

Vacuum range	0-600mbar
Aspirating speed	1-15mL/S
Autoclave component	tube; waste bottle; operation handle;
Dimension[WxDxH]	180x240x450mm
Weight	3kg
Input voltage	100-240VAC, 50/60 Hz
Bottle Volume	4L



Hydrophobic filter  
0.45µm  
Φ6mm

Wide range of adapters fit well with tube, microplate and disk plate for various of tasks, all of which can be fully autoclaved ( At 121°C 1 bar for 20 minutes, After autoclaving the equipment must be cooled down before use ).

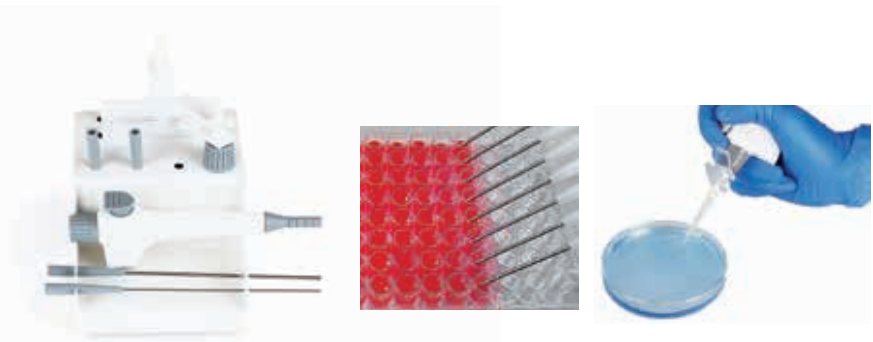

# Thermal Control



# Thermal Control

## SCI1000-G

Thermal Cycler Gradient

## SCI1000-S

Thermal Cycler


The SCIOLOGEX SCI1000-S and New SCIOLOGEX SCI1000-G gradient Thermal Cyclers deliver high performance, high throughput with easy programming via the color touch screen display. Excellent temperature uniformity and high speed ramping rates with outstanding heat conductivity.

### Features

- Reliable heating/cooling elements and precise temperature control
- Unique design of block ensures the temperature uniformity and repeatable results
- 7 inch Large color touch panel screen for easy programming with user friendly software
- High performance DSP and temperature control
- Fast heating and cooling rate
- Large user program storage







Excellent temperature uniformity



Gradient function (not available in the USA)



LCD touch panel



Excellent temperature accuracy



## Specifications

	SCI1000-G	SCI1000-S
Sample Capacity	96X0.2mL PCR tube, 8X12 PCR plate or 96 well plate	96X0.2mL PCR tube, 8X12 PCR plate or 96 well plate
Heating Temperature Range	4-105°C	4-105°C
Lid Temperature Range	30-110°C	30-110°C
Temperature Display Accuracy	±0.1°C	±0.1°C
Temperature Control Accuracy [at 55°C]	±0.3°C	±0.3°C
Temperature uniformity[at 55°C]	<0.3°C	<0.3°C
Max. Heating/Cooling Rate	3°C/Sec	3°C/Sec
Gradient Temperature Setting Range	30-99°C	-
Gradient Range	1-42°C	-
Adapter block material	aluminum	aluminum
Display	7" LCD 800x480	7" LCD 800x480
Input	Touch panel	Touch panel
User defined file system	Max. 30 segments 99 cycles max. 16 folder and 16 files each folder	Max. 30 segments 99 cycle max. 16 folder and 16 files each folder
Power off protection	Yes	Yes
Power Supply	100-120V/200-240V,50/60Hz	100-120V/200-240V,50/60Hz
Dimension[WxDxH]	280x370x250 mm	280x370x250 mm
Weight	11kg	11kg

# Dry Bath

## SCI120-S

### Dry bath

#### Features

- A wide range of temperature control up to 120°C
- Timer function support is available
- Various types of optional blocks are available
- Overheating protection
- Lid for protection and heat preservation



#### Specifications

	SCI120-S
Functions	Heating
Temperature range	Room temp.-120°C
Temperature control accuracy	± 0.5°C
Temperature uniformity	± 0.5°C
Max. heating rate	5.5°C/min
Timer	0min-99h59min
Screen	LED
Overheating protection	140°C
Adapter block material	aluminum
Voltage, Frequency	100-120V/220-240V,50Hz/60Hz
Power	160W
Dimension[WxDxH ]	175 x 290 x 85mm
Weight	3kg

Cat.No.	Block types	Capacity	Diameter Depth
18900218		0.2mLx54	6.4mm 15mm
18900219		0.5mLx40	8.2mm 26.4mm
18900253 (1.5mL) 18900220 (2mL)		1.5mLx40 2mLx40	11mm 34.7mm
18900221		5/15mLx28	17mm 48mm
18900222		50mLx8	29.8mm 48mm
18900224		0.2mL+0.5mL+1.5/2mL 18+18+18	-
18900223		96 or 384 well plate	-



Adapter block selection



Overheating protection



Timer



LED display

# Dry Baths



The SCILOGEX Mini Dry baths are portable and compact and useful for rapid and uniform heating of biological samples, in applications like preservation, denaturation of nucleic acids and proteins and many other applications.

## SCI-100MiniHCL SCI-100MiniHC SCI-100MinH Dry Bath

### Features:

- Lightweight
- LCD displays temperature and time.
- Rapid calibration support
- Overheating protection.
- Optional blocks with different capacities are available.
- Safe and stable.
- USB interface to save the data
- Mini HCL100 with hot lid to preserve the generated heat.

Cat.NO.	Block types	Capacity	Diameter x depth
18900414		0.2mlx40	6.4x20 mm
18900415		0.5mlx24	8.2x28.4mm
18900416		1.5mLx15	11.2x31mm
18900428		2mlx15	11x31mm
18900417		5mLx6	17x31mm
18900426		15mlx4	16.4x45mm
18900427		50mlx2	29x45mm

### Specifications

	SCI-100MiniHCL	SCI-100MiniHC	SCI-100MiniH0
Display	LCD	LCD	LCD
Temperature setting range[°C]	0-100	0-100	25-100
Temperature range [°C]	Room temperature-23~100	Room temperature-23~100	Room temperature+5~100
Temperature control accuracy[°C]	± 0.5	± 0.5	± 0.5
Temperature display accuracy[°C]	0.1	0.1	0.1
Minimum time taken for heating(25°C-100°C )	≤20min	≤20min	≤20min
Minimum time for cooling ( 20°C-0°C )	≤25min	≤25min	/
Max. Heating Rate	8° C /min	8° C /min	6.5° C /min
Max. Cooling Rate	3° C /min	3° C /min	/
Time setting range	0-999min/0-999sec	0-999min/0-999sec	0-999min/0-999sec
No. of programs in memory	9(2steps for each )	9(2steps for each )	9(2steps for each )
Rapid calibration	Support	Support	Support
USB interface	Support	Support	Support
Error code reminder	Support	Support	Support
External dimension [mm]	110x162x140	110x162x140	110x162x140
Overall weight [kg]	≤1	≤1	≤1
Power supply	DC 12V,100-240V, 50/60Hz	DC 12V,100-240V, 50/60Hz	DC 12V,100-240V, 50/60Hz
Power[w]	60	60	60
Operating temperature[°C]	+10-40	+10-40	+10-40
Operating humidity [% RH]	≤80	≤80	≤80

# Thermal Mixers

## SCI-110HC-Pro Dry bath with cooling

### Features

- Precise temperature control for heating and cooling
- Flexible adapter selection
- Programmable
- Compatible with various tubes
- Quick interchange of blocks with magnet adhesion technology and without any tools
- Block equipped with a lid for heat preservation



Excellent temperature accuracy



Programmable



Adapter self recognition



Cat.No.	Blocks	Speed	Capacity	Diameter x Depth
18900238		1500rpm	24x0.5mL	8.1x26mm
18900237		1500rpm	24x1.5mL	10.9x30.8mm
18900239		1500rpm	24x2mL	10.9x30.8mm
18900240		1500rpm	8x5mL	13.6x42mm
18900241		800rpm	8x15mL	6.5x80mm
18900242		600rpm	4x50mL	29.6x80mm
18900244		1500rpm	well plate	-
18900243		1500rpm	0.2mLx96 PCR plate	-

### Specifications

Functions	SCI-110HC-Pro
Temperature range	Heating & cooling Heating: room temp. - 110°C Cooling: room temp. - below room temp. 25°C
Temperature control accuracy[@20-45°C]	± 0.5°C
Temperature uniformity[@20-45°C]	Max ± 0.5°C
Max. heating rate	5.5°C/min
Max. cooling rate	2.5°C/min (100°C-room temp.) 0.5°C/min (below room temp.)
Screen	TFT
Program	9
Overheating protection	150°C
Adapter block material	aluminum
Voltage, Frequency	100-240V,50/60Hz
Power	200W
Dimension[WxDxH] ( without the heating block )	200x235x120mm
Weight	7.3kg

The Thermo Mix series allow for precise and efficient heating and mixing, as well as excellent temperature accuracy and uniformity, offering a wide range of applications, such as gene synthesis, gene purification, gene and protein denaturation, enzymatic reaction, bacterial growth, etc.

## SCI-100HCM-Pro

Thermal mixer

## SCI-100HM-Pro

Thermal mixer with heating



### Features

- Excellent mixing result
- Stable and wide range of speed adjustment
- Precise temperature control for heating and cooling
- Flexible adapter selection
- Programmable
- Compatible with various tubes
- Quick interchange of blocks with magnet adhesion technology and without any tools
- Block equipped with a lid for heat preservation



Blocks self recognition

### Specifications

	SCI-100HCM-Pro	SCI-100HM-Pro
Functions	Heating, cooling & mixing	Heating & mixing
Temperature range	Heating: room temp. - 100°C Cooling: room temp. - below room temp. 15°C	Heating: room temp. - 100 °C
Temperature control accuracy[@ 20–45°C]	± 0.5°C	± 0.5°C
Temperature uniformity[@ 20–45°C]	Max. ± 0.5°C	Max. 0.5 °C
Max. heating rate	5.5°C/min	5.5°C/min
Max. cooling rate	5°C/min(100°C-room temp.) 0.5°C/min(below room temp.)	-
Mixing frequency	200-1500rpm	200-1500rpm
Mixing orbit	3mm	3mm
Screen	TFT	TFT
Program	9	9
Overheating protection	150°C	150°C
Adapter block material	aluminum	aluminum
Voltage, Frequency	100–240V, 50Hz/60Hz	100-240V, 50Hz/60Hz
Power	200W	200W
Dimension[WxDxH] ( without the heating block )	200×235×120mm	200×235×120mm
Weight	7.3kg	7.3kg

# Distilling & Mixing



## SCI20L-PRO Rotary Evaporator

### 20L capacity

The SCI20L-Pro is ideal for continuous distillation of many volatile solvents under reduced pressure. It offers an excellent distilling solution in a wide range of applications.



#### Features:

- Large LCD digital display with heating temperature, rotation speed, clockwise, anti-clockwise and timer;
- Simple automatic motorized lift (stroke 180mm), smooth and silent;
- Water/oil heating bath with wide temperature range from room temperature range to max. 180°C;
- Speed range from 10 to 150rpm, and interval operation in clockwise and anti-clockwise directions for drying process;
- Double-layer high-efficiency condensing tube with large condensation area and strong evaporation capacity, ensuring efficient sample recovery;
- Patented PTFE double sealing ring with excellent sealing performance.
- A switching valve for continuous collection without compromising the system vacuum and solvent distillation.



Large LCD display



Overheating protection



Chemical resistance

# Rotary Evaporator



**Double-layer high-efficiency condenser**  
large condensation area and strong evaporation capacity, ensuring efficient sample recovery.



**Switching valve design**  
A switching valve for continuous collection without compromising the system vacuum and solvent distillation.



**Heating bath**

- Water & oil bath;
- Enhanced lifetime through exclusive use of corrosion-free stainless-steel;
- The heating bath has special heat insulation structure design, so that the surface temperature is far lower than the temperature in the bath, to help prevent accidental burns.

## Specifications

		SCI20L-Pro
performance	Temperature range	Room temp. ~180°C (both water and oil)
	Control Accuracy	Water: ±1°C Oil: ±3°C
	Rotation Speed	10~150rpm
	Evaporation capacity	Max.4.0L/h (water vapor volume)
function	Ultimate vacuum	Less 2.6hpa
	Temperature control method	Micro processor PID control
	Display	LCD (temperature/speed/clockwise and Anti-clockwise/time)
	Stroke Displacement	Automatic 180mm
constitute	Safety features	Motor over-current protection, Residual Current Device, lifting overload protection, Boil-dry protection, over-temperature protection
	Sample flask	Round flask 20L
	Receiving flask	Round flask 10L with drain valve
	Condenser	Two-section vertical triple serpentine condenser, cooling surface 1.2m <sup>2</sup>
Specification	Heating bath size	φ450×240mm
	Takeover caliber	Cooling/suction nozzle outer diameter 16mm, vacuum pump nozzle outer diameter 16mm
Dimension[D×W×H]		1160mm×600mm×1860mm
Power supply		220V/4600W/50/60Hz 380V/6000W/50/60Hz



## SCI100-Pro Digital Rotary Evaporator




LCD Digital Rotary Evaporator is an essential instrument in chemical laboratories for the efficient and gentle removal of solvents from samples by evaporation. It offers an excellent distilling solution in a wide range of applications.

### Features:

- Digital display of both rotation speed and heating temperature allows for optimal control of all distillation processes
- Automatic motor lift releases the evaporating flask to a safe position in case of power failure
- 5L heating bath with wide temperature range from room temp. to 180°C)
- Overheating protection temperature at 220°C
- Speed range from 20 to 280rpm, and interval operation in clockwise and anticlockwise directions for drying process
- Patented condenser (cooling surface 1700cm<sup>2</sup>) with excellent cooling effect
- Ejection mechanism ensures easy removal of evaporating flask
- Patented double spring sealing ring which is made of PTFE provides an excellent sealing performance
- Remote function provides PC control and data transmission



Large LCD display



USB connector



Chemical resistance



Overheating protection



Compatible with all range of glassware

### Specifications

	SCI100-Pro
Motor Type	Brushless DC motor
Speed Range	20-280rpm
Display	LCD(speed,temperature, time)
Clockwise and Anti-clockwise	Yes
Heating Temperature Range	Room temp. to 180°C
Control Accuracy	±1°C
Heating Power	1300W
Stroke Displacement	automatic 150mm
Timer	Yes
Time Setting Range	1-999min
Dimension[D×W×H]	465×457×583mm
Weight	15kg
Permissible Ambient Temperature	5-40°C
Permissible Relative Humidity	80%RH
Protection Class	IP20
USB Interface	Yes
Voltage/Frequency	100-120/200-240V 50/60 Hz
Power	1400 W

# Rotary Evaporator

The SCIOGEX SCI100-S Digital Rotary Evaporator is an excellent choice for evaporation, distillation and separation of chemicals. It can be used as a multifunctional system in combination with vacuum pump, vacuum controller and circulating refrigerators to provide excellent distillation solutions in many laboratory applications.

## Features:

- 5L heating bath with a wide temperature range (room temp. to 180°C), independent temperature control, make it can be used separately. Water/oil heating mode can be changed only through a switch.
- Manual lift combined with auxiliary lift for precise positioning of the glassware.
- PID control ensures high temperature accuracy at  $\pm 1^\circ\text{C}$  (water).
- Overheating protection temperature at 220°C
- Boil-dry protection, automatically power off if heating without water/oil in the heating bath.
- Speed range from 20 to 200rpm, timing interval operation in clockwise and anticlockwise directions for drying process.
- Patented condenser (cooling surface 1200/1700cm<sup>2</sup> for selection), double helix condensing tube + center circular arc design to speed up the flow rate of liquid with excellent cooling effect.
- Ejection mechanism ensures easy exchange of evaporating flask
- Adjustable immersion angle
- Patented double spring sealing ring which is made of PTFE provides an excellent sealing performance
- Remote function provides PC control and data transmission.
- Compatible with the entire range of RE100-Pro glassware.



USB connector



Chemical resistance




Overheating protection



Compatible with all range of glassware

## SCI100-S LED Digital Rotary Evaporator

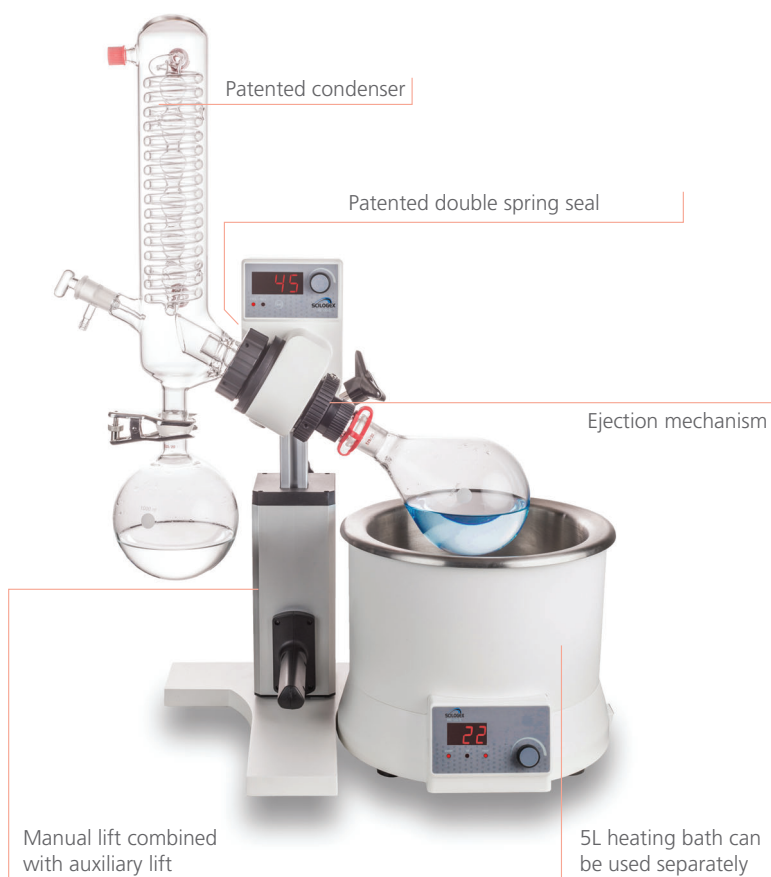

## Specifications

	SCI100-S
Motor Type	Brushless DC motor
Speed Range	20-200rpm
Display	LED (speed, temperature, time)
Clockwise and Anti-clockwise	Yes
Heating Temperature Range	Room temp. to 180°C
Control Accuracy	water: $\pm 1^\circ\text{C}$ oil: $\pm 3^\circ\text{C}$
Heating Power	1010 W
Stroke Displacement	Manual 110mm + auxiliary 100mm
Interval Time Setting Range	1~999s
Dimension [D × W × H]	Main Unit: 440 × 320 × 450mm Heating Bath: 300 × 300 × 240mm
Weight	Main Unit: 7kg Heating Bath: 3kg
Permissible Ambient Temperature	5~40°C
Permissible Relative Humidity	80%RH
Protection Class	IP20
USB Interface	Yes
Voltage/Frequency	100~120/200~240V 50/60 Hz
Power	1100 W

## Condenser



### Vertical

Cat. No.	Glassware type	Volume	Cooling surface
18900165	Evaporating flask(NS29/32) Receiving flask(KS35/20)	1000mL	1700cm <sup>2</sup>
18900173	Evaporating flask(NS24/40) Receiving flask(KS35/20)	1000mL	1700cm <sup>2</sup>
18900166	(COATED)Evaporating flask(NS29/32) Receiving flask (KS35/20)	1000mL	1700cm <sup>2</sup>
18900174	(COATED)Evaporating flask(NS24/40) Receiving flask (KS35/20)	1000mL	1700cm <sup>2</sup>
18202410	evaporating flask (NS 29/32) Receiving flask (KS 35/20)	1000mL	1200cm <sup>2</sup>



### Diagonal

Cat. No.	Glassware type	Volume	Cooling surface
18900163	Evaporating flask(NS29/32)Receiving flask(KS35/20)	1000mL	1700cm <sup>2</sup>
18900171	Evaporating flask(NS24/40)Receiving flask(KS35/20)	1000mL	1700cm <sup>2</sup>
18900164	(COATED)Evaporating flask(NS29/32) Receiving flask (KS 35/20)	1000mL	1700cm <sup>2</sup>
18900172	(COATED)Evaporating flask(NS24/40) Receiving flask (KS35/20)	1000mL	1700cm <sup>2</sup>



### Heating Bath

Cat. No.	Description	Volume
18900201	Rotary Evaporator, 220V	5L
18900202	Rotary Evaporator, 110V	5L
18101888	LED heating bath, 220V	5L
18101936	LED heating bath, 110V	5L



# Rotary Evaporator | Accessories

## Glassware



### Evaporating flask

Cat. No.	Volume	Size
18300116	50mL	NS 29/32
18300117	100mL	NS 29/32
18300118	250mL	NS 29/32
18300119	500mL	NS 29/32
18300120	1000mL	NS 29/32
18300121	2000mL	NS 29/32
18300655	50mL	NS24/40
18300201	100mL	NS 24/40
18300202	250mL	NS 24/40
18300203	500mL	NS 24/40
18300204	1000mL	NS 24/40
18300205	2000mL	NS 24/40



### Receiving flask

Cat. No.	Volume	Size
18300107	100ml	KS 35/20
18300108	250ml	KS 35/20
18300109	500ml	KS 35/20
18300110	1000ml	KS 35/20
18300111	2000ml	KS 35/20



### Distilling spider with 5 flasks(without flask)

Cat. No.	Volume	Size
18900194	/	NS 29/32, NS24/29
18900177	/	NS 29/42, NS24/40

### Foam brake

Cat. No.	Volume	Size
18300093	250ml	NS 29/32
18300207	250ml	NS 24/40



### Vapor tube

Cat. No.	Volume	Size
18100998	/	NS 29/32
18300206	/	NS 24/40

### Connector

Cat. No.	Volume	Size
18300094	/	NS 29/32, NS24/29
18300095	/	NS 29/32, NS19/26
18300096	/	NS 29/32, NS14/23
18300199	/	NS24/40, NS19/22
18300200	/	NS 24/40, NS14/20
18900193	/	NS 24/40, NS 29/42



## Additional

### MZ 1C Chemistry-design diaphragm pump

#### Specification

Number of heads / stages: 2 / 2  
 Max. pumping speed: 0.75 m<sup>3</sup>/h  
 Ultimate vacuum (abs.): 12mbar  
 Nozzle Size: DN 8-10 mm  
 Rated motor power: 0.06kW  
 Rated motor speed: 1500/1800 rpm  
 Noise level: 45dB  
 ATEX: II 3G IIC T3 X Internal Atm. only

#### Cat. No.

#### Voltage

18900231	Cn plug, 100V-120V/200-230V 50Hz/60Hz
18900232	Euro plug, 100V-120V/200-230V 50Hz/60Hz
18900233	USA plug, 100V-120V/200-230V 50Hz/60Hz
18900234	UK plug, 100V-120V/200-230V 50Hz/60Hz



### C410 Chemistry-design diaphragm pump

#### Specification

Maximum Vacuum: 13mbar  
 Work Mode: In Successions  
 Nozzle Size: 8mm, Power: 95W  
 Motor speed: 1450rpm  
 Flow Rate:

mbar	1000	880	750	600	480	280
L/min	25	22	20	12	7.5	5



### Vacuum regulator/moisture trap

#### Cat. No.

#### Description


18900186  
 In use of control small volume, installed in a vacuum between DVR480 and vacuum system.  
 Material: PVDF, PTFE, ABS, Borosilicate Glass, Stainless Steel



### Seals and other accessories

#### Cat. No.

#### Description

18202027	PTFE vacuum seal	
18900362	Ultra resistant FFKM seal for applications with highly abrasive solutions	
18900190	Evaporation flask clip (red) CS002440	
18900188	Evaporation flask clip (green) CS002942	

# Magnetic Hotplate Stirrers

SCIOLOGEX 550°C series magnetic stirrer is developed for demanding applications. It is widely used in chemical synthesis, physical and chemical analysis, bio-pharmaceuticals etc. Combining with glass ceramic work plate, brushless DC motor and external temperature sensor, the work plate temperature is optimized up to 550°C.

## SCI550-Pro LCD Digital Magnetic Hotplate Stirrer

### Features

- LCD display for precise monitoring of speed and temperature
- Built-in PID controller ensures safe heating of the medium with overheating protection
- Max. heating plate temperature 550°C
- Glass ceramic work plate provides excellent chemical resistant performance and most efficient heat transfer
- External temperature control is possible by connecting the temperature sensor(PT1000) with an accuracy at  $\pm 0.2^{\circ}\text{C}$
- Digital speed controlling, max. speed at 1500rpm
- Outstanding brushless DC motor enables more stirring power
- Two rotating knobs enable easy adjustment of speed and temperature
- The "HOT" warning will flash when the work plate temperature is above 50°C even when the hotplate is turned off
- Remote function provides PC control and data transmission



## SCI550-S LED Magnetic Hotplate Stirrer

### Features

- LED display for precise monitoring of temperature
- A wide speed range of 0 to 1500rpm
- Max. Heating plate temperature 550°C
- External temperature control is possible by connecting the temperature sensor(PT1000) with accuracy at  $\pm 0.2^{\circ}\text{C}$
- The "HOT" warning will flash if the work plate temperature is above 50°C

# Magnetic Hotplate Stirrers



Overheating protection



External sensor



Wide range of accessories



Chemical resistance



## Specifications

	SCI550-Pro	SCI550-S
Work plate Dimension [W x D]	184x184mm (7 inch)	184x184mm (7 inch)
Work plate material	Glass ceramic	Glass ceramic
Motor type	Brushless DC motor	Shaded pole motor
Motor rating input	18W	15W
Motor rating output	10W	1.5W
Power	1050W	1030W
Heating output	1000W	1000W
Voltage	100-120/200-240V 50/60Hz	100-120/200-240V 50/60Hz
Stirring positions	1	1
Max. stirring quantity, [H <sub>2</sub> O]	20L	10L
Max. magnetic bar[length]	80mm	80mm
Speed range	100-1500rpm resolution ±1rpm	0-1500rpm
Speed display	LCD	Scale
Temperature display	LCD	LED
Heating temperature range	Room Temp.-550°C, increment 1°C	Room temp.-550°C, increment 5°C
Temperature control accuracy	±1°C(<100°C) ±1%(>100°C)	±10°C
Overheating protection	580°C	580°C
Temperature display accuracy	±0.1°C	±1°C
External temperature sensor	PT1000 (accuracy ±0.2)	PT1000 (accuracy ±0.2)
"Hot" warning	50°C	50°C
Data connector	RS232	-
Protection class	IP21	IP21
Dimension [WxDxH]	215x360x112mm	215x360x112mm
Weight	5.3kg	4.5kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH

## Magnetic Hotplate Stirrers

SCIOGEX 340°C magnetic hotplate stirrers include all leading safety standards and features for superior ease of use and are cost-effective. They are widely used in chemical synthesis, physical and chemical analysis, bio-pharmaceuticals, etc.

### SCI340-ProT LCD Digital Magnetic Hotplate Stirrer with Timer



### SCI340-Pro LCD Digital Magnetic Hotplate Stirrer



#### Features

- Brushless DC motor is maintenance free
- Digital temperature control with max. temperature at 340°C
- Digital speed control with max. speed up to 1500rpm
- Max. stirring quantity of H<sub>2</sub>O at 20L
- Safety circuits provide overheating protection
- The "HOT" warning will flash if the plate temperature is above 50°C even when the hotplate is turned off
- Wide range timer function from 1min to 99h59min(MS-H-ProT only)
- High-resolution LCD display shows actual temperatures and speed (MS-H-ProT displays the time also)
- External temperature control is possible by connecting the temperature sensor(PT 1000) with accuracy at  $\pm 0.2^{\circ}\text{C}$
- Stainless steel work plate with ceramic coating provides good chemical-resistant performance
- Remote function provides PC control and data transmission
- A wide variety of accessories are available

### SCI340-HS Magnetic Hotplate Stirrer

#### Features

- Maintenance free brushless DC motor
- Max. temperature to 340°C
- Stirring speed up to 1500 rpm
- Stainless steel work plate with ceramic coating provides good chemical-resistant performance
- Safety circuits provide overheating protection
- A wide variety of accessories are available







External sensor



Brushless DC motor



Wide range of accessories



RS232 connector



Chemical resistance



### Specifications

	SCI340-Pro	SCI340-ProT	SCI340-HS
Work plate dimension	φ135mm(5 inch)	φ135mm(5 inch)	φ135mm(5 inch)
Work plate material	stainless steel cover with ceramic	stainless steel cover with ceramic	stainless steel cover with ceramic
Motor type	Brushless DC motor	Brushless DC motor	Brushless DC motor
Motor rating input	18W	18W	18W
Motor rating output	10W	10W	10W
Power	550W	550W	530W
Heating output	500W	500W	500W
Voltage	100-120/200-240V 50/60Hz	100-120/200-240V 50/60Hz	100-120/200-240V 50/60Hz
Stirring positions	1	1	1
Max. stirring quantity[H <sub>2</sub> O]	20L	20L	20L
Max. magnetic bar[length]	80mm	80mm	80mm
Speed range	100-1500rpm resolution±1rpm	100-1500rpm resolution±1rpm	0-1500rpm resolution±1rpm
Speed display	LCD	LCD	Scale
Temperature display	LCD	LCD	Scale
Heating temperature range	Room temp.-340°C, increment 1°C	Room temp.-340°C, increment 1°C	Room temp.-340°C
Temperature control accuracy	±1°C(<100°C) ±1%(>100°C)	±1°C(<100°C) ±1%(>100°C)	-
Over temperature protection	360°C	360°C	350°C
Temperature display accuracy	±0.1°C	±0.1°C	±0.5°C
External temperature sensor	PT1000 (accuracy ±0.2)	PT1000 (accuracy ±0.2)	-
"Hot" warning	50°C	50°C	-
Timer function	-	1min to 99h 59min	-
Data connector	RS232	RS232	-
Protection class	IP42	IP42	IP42
Dimension[WxDxH]	160×280×85mm	160×280×85mm	160×280×85mm
Weight	2.8kg	2.8kg	2.8kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C, 80%RH

# Magnetic Hotplate Stirrers

SCIOLOGEX SCI280-Pro is a perfect device for handling small volume task on daily application, as a low temperature magnetic stirrer with max. temperature at 280°C.

## SCI280-Pro LED Digital Magnetic Hotplate Stirrer

### Features

- Digital temperature control with max. temperature up to 280°C
- Digital speed control with max. speed up to 1500rpm
- Stainless steel work plate with ceramic coating provides good chemical resistant performance
- External temperature control is possible by connecting the temperature sensor(PT1000) with an accuracy at  $\pm 0.5^{\circ}\text{C}$
- LED display shows temperature and speed
- The "HOT" warning will flash when the work plate temperature is above 50°C even if the hotplate is turned off



External sensor



Wide range of accessories



Chemical resistance



LED display



### Specifications

	SCI280-Pro
Work plate Dimension	$\phi 135\text{mm}(5\text{ inch})$
Work plate material	stainless steel cover with ceramic
Motor type	Brushless DC motor
Motor rating input	5W
Motor rating output	3W
Power	515W
Heating output	500W
Voltage	100-120/200-240V 50/60Hz
Stirring positions	1
Max. stirring quantity	3L
Max. magnetic bar[length]	50mm
Speed range	200-1500rpm
Speed display	LED
Temperature display	LED
Speed display resolution	$\pm 1\text{rpm}$
Heating temperature range	Room temp.-280, increment 1°C
Control accuracy of work plate	$\pm 1^{\circ}\text{C}(<100^{\circ}\text{C}) \pm 1^{\circ}\text{C}(>100^{\circ}\text{C})$
Overheating protection	320°C
Temperature display accuracy	$\pm 1^{\circ}\text{C}$
External temperature sensor	PT1000 (accuracy $\pm 0.5^{\circ}\text{C}$ )
"Hot" warning	50°C
Protection class	IP21
Dimension[WxDxH]	150×260×80mm
Weight	1.8kg
Permissible ambient temperature and humidity	5-40°C, 80%RH



# Magnetic Hotplate Stirrers

## SCI380H-Pro LCD Digital Hotplate

## SCI6-Pro LCD Digital Magnetic Stirrer

## SCI380HS-Pro LCD Digital Magnetic Hotplate Stirrer

SCIOGEX 380°C magnetic hotplate stirrers include all leading safety standards and is chemically-resistant with white ceramic work plate. They can be used in physical, chemical, analytical and biological laboratories.



### Features:

- Max. heating temperature is 380°C
- High resolution LCD displays actual temperature and speed.
- Brushless DC motor is maintenance free
- Aluminum cover with ceramic work plate, allows for immediate heat transfer
- External temperature control is possible with temperature sensor PT1000
- Digital temperature control with max. temperature at 380°C
- Digital speed control with max. speed up to 1500rpm
- Max. stirring quantity of H<sub>2</sub>O at 5L

Specifications	SCI380HS-Pro	SCI6-Pro	SCI380H-Pro
Work plate Dimension	140x140mm	140x140mm	140x140mm
Work plate material	Aluminum cover with ceramic coating	Aluminum cover with ceramic coating	Aluminum cover with ceramic coating
Motor type	Brushless DC motor	Brushless DC motor	-
Motor rating input	2.4W	2.4W	-
Motor rating output	1.8W	1.8W	-
Power	510W	10W	510W
Heating output	500W	-	500W
Voltage	100-120/200-240V, 50/60Hz	100-240V, 50-60Hz	100-120/200-240V, 50/60Hz
Stirring positions	1	1	-
Max. stirring quantity[H <sub>2</sub> O]	5L	5L	-
Max. magnetic bar[length]	50mm	40mm	-
Speed range	200-1500rpm	200-1500rpm	-
Speed display	LCD	LCD	-
Temperature display	LCD	-	LCD
Heating temperature range	Room temp.+5°C - 380°C	-	Room temp.+5°C - 380°C
Over heat Protection	420°C	-	420°C
Temperature display accuracy	±0.1°C	-	±0.1°C
External temperature sensor	PT1000 (accuracy ±0.5°C)	-	PT1000 (accuracy ±0.5°C)
Control accuracy of sensor	±20rpm	±20rpm	-
Protection class	IP21	IP21	IP21
Dimension [W x D x H]	320x180x108mm	320x180x108mm	320x180x108mm
Weight	2.2kg	2.2kg	2.2kg
Permissible ambient temperature and humidity	5-40°C 80%RH	5-40°C 80%RH	5-40°C 80%RH

# Magnetic Hotplate Stirrers

## SCI340H-4

### LCD 4-Channel Digital Magnetic Hotplate Stirrer



It is widely used in chemical synthesis, physical and chemical analysis, bio-pharmaceuticals etc.

#### Features

- Independent heating and stirring control
- LCD display shows actual temperatures and speed
- PID controller ensures a precise and steady heating process, Max. temperature up to 340°C
- Brushless DC motor enables more powerful speed control
- External temperature sensor(PT1000) with accuracy at 0.2°C
- Overheating protection temperature at 420°C
- Stainless steel work plate with ceramic coating provides good chemical-resistant performance
- A wide variety of accessories are available

#### Specifications

	SCI340H-4
Work plate dimension	Φ134mm ( 5inch )
Plate material	Stainless steel with ceramic coating
Motor type	Brushless DC motor
Motor rating input[W]	1.8W × 4
Power[W]	515W × 4
Heating Power[W]	500 × 4
Voltage	100-120V,60Hz; 200-240V,50 Hz
Stirring positions	4
Max. stirring quantity of single position (H2O)	10L
Max. magnetic bar[mm]	40
Speed range[rpm]	200-1500
Speed display	LCD
Temperature display	LCD
Control accuracy of sensor[rpm]	± 20
Temperature range[° C]	25-340°C
Over temperature protection[° C]	420
Temperature display accuracy[° C]	± 0.1
External temp. sensor	PT1000 ( Accuracy ± 0.2°C )
IP Protection class	IP21
Dimensions[WxDxH][mm]	698*270*128
Weight[kg]	9.5kg
Permissible ambient temperature[° C]	5 ~ 40
Permissible relative humidity	80%

## SCI120-HS 10-Position Magnetic Hotplate Stirrer

### Features

- Maintenance-free brushless DC motor
- Max speed 1100rpm
- Max.temperature 120°C
- Stainless steel work plate, covered with silicone cushion, provides the excellent performance of heating uniformity and skid resistance



Skid resistance



Multiple position



Brushless DC motor



### Specifications

	SCI120-HS
Work plate dimension[W x D]	180x450mm
Work plate material	Stainless steel with silicone
Motor type	Brushless DC motor
Motor rating input	12W
Motor rating output	4W
Power	490W
Heating output	470W
Voltage	100-120/200-240V 50/60Hz
Stirring positions	10
Max. stirring quantity	0.4Lx10
Max. magnetic bar[length]	40mm
Speed range	0-1100rpm
Speed display	scale
Temperature display	scale
Heating temperature range	Room temp.-120°C
Overheating protection	140°C
Protection class	IP42
Dimension[WxDxH]	182×622×65mm
Weight	3.2kg
Permissible ambient temperature and humidity	5-40°C, 80%RH

# Hotplates

## SCI550-H

### LED Hotplate

#### Features

- LED screen shows temperature
- Max. temperature up to 550°C
- Separate safety circuits with fixed safety temperature of 580°C
- External temperature control is possible by connecting the temperature sensor(PT 1000) with an accuracy at  $\pm 0.5^{\circ}\text{C}$
- Glass ceramic work plate provides excellent chemical-resistant performance and most efficient heat transfer
- The "HOT" warning will flash if the work plate temperature is above 50°C even when the hotplate is turned off



Wide range of accessories



Chemical resistance



Overheating protection



"HOT" warning prevents burning

#### Specifications



	SCI550-H
Work plate dimension[WxD]	184x184mm(7 inch)
Work plate material	Glass ceramic
Power	1010W
Voltage Frequency	100-120/200-240V,50/60Hz
Heating Power	1000W
Heating position	1
Heating temperature range	Room temp.-550°C,increment 5°C
Control accuracy of work plate	$\pm 10^{\circ}\text{C}$
Safety temperature	580°C
Temperature display	LED
Temperature display accuracy	$\pm 1^{\circ}\text{C}$
External temperature sensor	PT1000( $\pm 0.5^{\circ}\text{C}$ )
Heating warning	50°C
Protection class	IP21
Dimension[WxDxH]	215x360x112mm
Weight	4.5kg
Permissible ambient temperature and humidity	5-40°C, 80%RH

## SCI7-S 7" Square Magnetic Stirrer

### Features

- Speed range of 0-1500rpm
- Max. stirring quantity of H<sub>2</sub>O at 10L
- Ceramic work plate provides excellent chemical resistant performance



## SCI-S Magnetic Stirrer

### Features

- Maintenance free brushless DC motor
- Speed range of 0-1500 rpm
- Max. stirring quantity of H<sub>2</sub>O at 20L
- Stainless steel work plate cover with ceramic material provides good chemical resistance performance

### F100 protective cover

for non-hotplate model,  
use with MS-S



Chemical resistance



Strong magnetism



### Specifications

Work plate dimension[WxD]	
Work plate material	
Motor type	
Motor input power	
Motor output power	
Power	
Voltage	
Stirring positions	
Max. stirring quantity[H <sub>2</sub> O]	
Max. magnetic bar[length]	
Speed range	
Speed display	
Protection class	
Dimension[WxDxH]	
Weight	
Permissible ambient temperature and humidity	

SCI7-S	SCI-S
184x184mm(7inch)	φ135mm(5 inch)
Glass ceramic	Stainless steel cover with ceramic
Shaded pole motor	Brushless DC motor
15W	18W
1.5W	10W
30W	30W
100-120/200-240V,50/60Hz	100-240V,50/60Hz
1	1
10L	20L
80mm	80mm
0-1500rpm	0-1500rpm
Scale	Scale
IP21	IP42
215x360x112mm	160x280x85mm
3.8kg	2.8kg
5-40°C, 80%RH	5-40°C, 80%RH

SCI7-S	SCI-S
184x184mm(7inch)	φ135mm(5 inch)
Glass ceramic	Stainless steel cover with ceramic
Shaded pole motor	Brushless DC motor
15W	18W
1.5W	10W
30W	30W
100-120/200-240V,50/60Hz	100-240V,50/60Hz
1	1
10L	20L
80mm	80mm
0-1500rpm	0-1500rpm
Scale	Scale
IP21	IP42
215x360x112mm	160x280x85mm
3.8kg	2.8kg
5-40°C, 80%RH	5-40°C, 80%RH

# Magnetic Stirrers



## SCI-PA LED Digital Magnetic Stirrer

### Features

- Digital speed control within the range of 100-1500rpm
- Max. stirring quantity of H<sub>2</sub>O at 3L
- LED display shows speed
- Nylon+GF housing provides a good performance of chemical resistance

## SCI-PB Magnetic Stirrer

### Features

- A wide range of 0-1500rpm
- Max. stirring quantity of H<sub>2</sub>O at 3L
- Nylon+GF housing provides a good performance of chemical resistance



Chemical resistance



Strong magnetism



LED display



### Specifications

	SCI-PA	SCI-PB
Work plate dimension[WxD]	φ135(5 inch)mm	φ135(5 inch)mm
Work plate material	N ylon+GF	N ylon+GF
Motor type	Brushless DC motor	DC motor
Motor input power	5W	5W
Motor output power	3W	3W
Power	15W	10W
Voltage	100-120/200-240V,50/60Hz	100-120/200-240V,50/60Hz
Stirring positions	1	1
Max. stirring quantity[H <sub>2</sub> O]	3L	3L
Max. magnetic bar[length]	50mm	50mm
Speed range	200-1500rpm	0-1500rpm
Speed display	LED	Scale
Protection class	IP42	IP42
Dimension[WxDxH]	150×260×80mm	150×260×80 mm
Weight	1.8kg	1.8kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH



## SCI-S10 10-Position Magnetic Stirrer

### Features

- Maintenance-free brushless DC motor
- Speed range of 0-1100rpm
- Stainless steel work plate covered with silicone cushion, provides excellent performance of skid resistance



Skid resistance



Multiple position



### Specifications

	SCI-S10
Work plate Dimension[WxD]	180×450mm
Work plate material	Stainless steel with silicone coating
Motor type	Brushless DC motor
Motor input power	12W
Motor output power	4W
Power	20W
Voltage	100-120/200-240V,50/60Hz
Stirring positions	10
Max. stirring quantity[H <sub>2</sub> O]	0.4LX10
Max. magnetic bar[length]	40mm
Speed range	0-1100rpm
Speed display	Scale
Protection class	IP21
Dimension[WxDxH]	622×205×65mm
Weight	3.2kg
Permissible ambient temperature and humidity	5-40°C, 80%RH

# Magnetic Stirrers

## SCI-Spin Ultra-flat Compact Magnetic Stirrer

With excellent stirring functionality, the compact shape of FlatSpin takes less bench space and makes storage easier.

### Features

- A wide range of speed from 15 to 1500rpm
- Automatic reverse rotation for excellent mixing
- Protection class (IP65)
- PET top provides excellent chemical resistance
- Ultra silence and vibration-free



EcoStir is a magnetic stirrer customized for liquid mixing, suitable for chemical analysis, biology reagent mixing, regular laboratory experiments and liquid handling.

## SCI-Stir Economical Magnetic Stirrer

### Features

- Maintenance free brushless DC motor
- Rare earth magnets give powerful stirring
- Stepless speed regulation 300-2000rpm
- Ultra silence and vibration-free design.
- PET top provides excellent chemical resistance
- Shaft can be fitted with a PH sensor or sensors for other purposes

### Specifications

	SCI-Spin	SCI-Stir
Work plate Dimension	φ90mm	φ120mm
Work plate material	PET	PET
Motor type	Motorless	Brushless DC motor
Motor output power	3W	1.2W
Power	5W	7.2W
Voltage	100-120/200-240V,50/60Hz	100-120/200-240V,50/60Hz
Stirring positions	1	1
Max. stirring quantity[H <sub>2</sub> O]	0.8L	1.5L
Max. magnetic bar[length]	40mm	40mm
Speed range	15-1500rpm	300-2000rpm
Speed setting	button	scale
Protection class	IP65	IP21
Dimension [W x D x H]	175x120x15mm	150x145x50mm
Weight	0.3kg	0.3kg
Permissible ambient temperature and humidity	5-40°C,80%RH	5-40°C,80%RH

# Magnetic Hotplate Stirrers | Accessories



Cat. No.	Description	SCI550-Pro	SCI550-S	SCI340-Pro	SCI340-T	SCI340-HS	SCI280-Pro
①	18900001 Blue carrying plate, use with color quarter pies			■	■	■	■
②	18900065 Blue Fixed ring, use with color quarter pies			■	■	■	■
③	18900002 Red quarter pie, 11 holes, 4 mL reaction vessel, Ø15.2mm, 20mm depth	■	■	■	■	■	■
④	18900003 Purple quarter pie, 4 holes, 20 mL reaction vessel, Ø28mm, 24mm depth	■	■	■	■	■	■
⑤	18900004 Blue quarter pie, 4 holes, 30mL reaction vessel, Ø28mm, 30mm depth	■	■	■	■	■	■
⑥	18900005 Black quarter pie, 4 holes, 40mL reaction vessel, Ø28mm, 43mm depth	■	■	■	■	■	■
⑦	18900048 Green quarter pie, 6 holes, 8mL reaction vessel, Ø17.8mm, 26mm depth	■	■	■	■	■	■
⑧	18900049 Golden quarter pie, 4 holes, 16mL reaction vessel, Ø21.6mm, 31.7mm depth	■	■	■	■	■	■
⑨	18101006 Reaction block for 50mL round bottom flask (one flask capacity)			■	■	■	■
⑩	18101007 Reaction block for 100mL round bottom flask (one flask capacity)			■	■	■	■
⑪	18101008 Reaction block for 250mL round bottom flask (one flask capacity)			■	■	■	■
⑫	18101009 Reaction block for 500mL round bottom flask (one flask capacity)			■	■	■	■
⑬	18900019 F101 protective cover, temperature resistance of 135°C			■	■	■	■
⑭	18900016 PT1000-A, length of 230mm	■	■	■	■		■
⑮	18900136 PT1000-B, temperature sensor with glass coated, length of 230mm	■	■	■	■		■
⑯	18900017 Support clamp of PT1000	■	■	■	■		
⑰	18900148 Support clamp of PT1000						■

# Magnetic Hotplate Stirrers | Accessories




## Stirrer bars

Stirrer bars and stirrer bar remover(PTFE), use below 150°C

### Models

SCI550-Pro SCI550-SS SCI340-Pro SCI340-T <sup>T</sup> SCI340-S SCI-S	SCI280-Pro SCI-PA SCI-PB	SXC120-HS SCI-S10 SCI-Spin SCI-Stir
---	--------------------------------	--

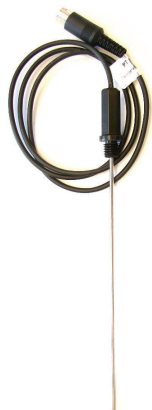

Cat. No.	Size of stirrer bars (LxØ)[mm]	Suitable for max. stirrer bar 80mm	Suitable for max. stirrer bar 50mm	Suitable for max. stirrer bar 40mm
18900006	10mmx6mm	■	■	■
18900007	15mmx8mm	■	■	■
18900008	20mmx8mm	■	■	■
18900009	25mmx8mm	■	■	■
12500005	30mmx6mm	■	■	■
18900011	40mmx8mm	■	■	■
12500004	50mmx8mm	■	■	
18900013	65mmx8mm	■		
18900014	80mmx13mm	■		
18900015	Stirrer bar remover, length of 200mm	■	■	■

# Overhead Stirrers

SCIOLOGEX Overhead Stirrers can accomplish the most demanding tasks and provide high safety and increased performance. They are widely used in chemical synthesis, pharmaceutical synthesis, physical and chemical analysis, petrochemical industries, etc.

## SCI20-Pro SCI40-Pro LCD Digital Overhead Stirrer

### Features

- High reliability and outstanding performance
- LCD display for precise monitoring of set and actual speeds, a wide range of speed from 50 to 2200rpm with control accuracy of  $\pm 3$ rpm
- Brushless DC motor for long life, maintenance free
- Torque trend display for real-time information on viscosity changes
- Safety circuits allow for safe stop function in anti-stall or overload conditions
- Smooth operation prevents accidental spillage and splashing
- Provides constant speed even with changes in viscosities of the samples
- Remote function provide PC control and data transmission
- Availability of auto-restart function in case of power loss for overnight operations.



LCD display



Torque display



Speed adjusts with change in viscosity



Wide range of accessories



### Specifications

Max. stirring quantity[H <sub>2</sub> O]	
Motor type	
Motor input power	
Motor output power	
Voltage	
Power	
Speed range	
Speed display accuracy	
Speed display	
Torque display	
Overload protection display	
Max. torque	
Viscosity max.	
Chuck range diameter	
Dimension[WxHxD]	
Weight	
Protection class	
Permissible ambient temperature and humidity	
Data connector	

	SCO20-Pro	SCI40-Pro
Max. stirring quantity[H <sub>2</sub> O]	20L	40L
Motor type	brushless DC motor	brushless DC motor
Motor input power	60W	120W
Motor output power	50W	100W
Voltage	100-240V, 50/60 Hz	100-240V, 50/60 Hz
Power	70W	130W
Speed range	50-2200rpm	50-2200rpm
Speed display accuracy	$\pm 3$ rpm	$\pm 3$ rpm
Speed display	LCD	LCD
Torque display	LCD	LCD
Overload protection display	LED lights	LED lights
Max. torque	40Ncm	60Ncm
Viscosity max.	10000mPas	50000mPas
Chuck range diameter	0.5-10mm	0.5-10mm
Dimension[WxHxD]	83x220x186mm	83x 220x 186mm
Weight	2.8kg	2.8kg
Protection class	IP21	IP21
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH
Data connector	RS232	RS232

## SCI20-S SCI20-Pro LED Overhead Stirrer

### Features

- High reliability and outstanding performance
- A wide range of speed from 50 to 2200rpm
- Brushless DC motor for long life, maintenance free and
- LED screen for monitoring actual speed
- Safety circuits allow for safe stop function in anti-stall or overload conditions



Wide range of accessories



### Specifications

	SCI20-Pro	SCI20-S
Max. stirring quantity(H <sub>2</sub> O)	20L	40L
Motor type	brushless DC motor	brushless DC motor
Motor input power	60W	120W
Motor output power	50W	100W
Voltage	100-240V, 50/60 Hz	100-240V, 50/60 Hz
Power	70W	130W
Speed range	50-2200rpm	50-2200rpm
Speed display accuracy	±3rpm	±3rpm
Speed display	LED	LED
Overload protection display	LED lights	LED lights
Max. torque	40Ncm	60Ncm
Viscosity max.	10000mPas	50000mPas
Chuck range diameter	0.5-10mm	0.5-10mm
Dimension[WxHxD]	83x220x186mm	83x.220x186mm
Weight	2.8kg	2.8kg
Protection class	IP21	IP21
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C 80%RH

# Overhead Stirrers | Accessories

## Universal plate stand

Dimension [W x D x H] : 200x310x780mm  
Material: stainless steel

**Cat. No.**  
18900258



## Propeller stirrer

shaft length 400mm  
stirrer diameter 50mm  
**Material:** 316L stainless steel  
**Application:** Standard stirring element used at medium and high speeds

**Cat. No.**  
18900071



## Straight stirrer

shaft length 40cm  
stirrer diameter 6cm  
**Material:** 316L stainless steel  
**Application:** Ideal for the mixing of low viscosity media at medium and high speeds

**Cat. No.**  
18900072



## Paddle stirrer

shaft length 40cm  
stirrer diameter 6.8cm  
**Material:** 316L stainless steel  
**Application:** Suitable for samples needed gentle processing at low and medium speeds

**Cat. No.**  
18900073



## Centrifugal stirrer

shaft length 40cm  
stirrer diameter 9cm  
**Material:** 316L stainless steel  
**Application:** Two-bladed stirrer whose blades open with increasing speed. perfect for stirring in round vessels with narrow necks. Medium to high speeds required.

**Cat. No.**  
18900074



## Propeller stirrer

shaft length 35cm  
stirrer diameter 6.5cm  
**Material:** PTFE coated  
**Application:** Standard stirring element, used at medium and high speeds

**Cat. No.**  
18900075



## Straight stirrer

shaft length 35cm  
stirrer diameter 7cm  
**Material:** PTFE coated  
**Application:** Ideal for the mixing of low viscosity media at medium and high speeds

**Cat. No.**  
18900076



## Paddle stirrer

shaft length 35cm  
stirrer diameter 6.8cm  
**Material:** PTFE coated  
**Application:** Suitable for samples needed gentle processing at low and medium speeds

**Cat. No.**  
18900077



## Centrifugal stirrer

shaft length 35cm  
stirrer diameter 8.5cm  
**Material:** PTFE coated  
**Application:** Two-bladed stirrer whose blades open with increasing speed. perfect for stirring in round vessels with narrow necks. Medium to high speeds required

**Cat. No.**  
18900078



SCIOLOGEX Vortex Mixers are ideal instruments for mixing liquid components in tubes, resuspension of cells, using an eccentric mechanism. They are widely used in biological and chemical analysis applications.

## SCI-VS Vortex Mixer

## SCI-FS Vortex Mixer



### Features:

- Touch operation or continuous mode
- Variable speed control from 0 to 2500rpm (SCI-VS)
- Fixed Speed 2500rpm (MX-F)
- Used for various mixing applications with optional adapters (SCI-VS)
- Specially designed vacuum suction feet for body stability
- Robust aluminum-cast construction

### Specifications

	SCI-VS (Adjustable speed)	SCI-FS (Fixed speed)
Voltage	100-120V/200-240V,50/60Hz	100-120V/200-240V,50/60Hz
Power	60W	60W
Mixing motion	Orbital	Orbital
Orbital diameter	4mm	4mm
Motor type	Shaded pole motor	Shaded pole motor
Motor rating input	58W	58W
Motor rating output	10W	10W
Speed range	0-2500rpm	2500rpm
Speed display	Scale	-
Run type	Touch operation/Continuous	Touch operation/Continuous
Dimension[WxHxD]	127x130x160mm	127x130x160mm
Weight	3.5kg	3.5kg
Permissible ambient temperature	5-40°C	5-40°C
Permissible relative humidity	80%RH	80%RH
Protection class	IP21	IP21



Wide range of accessories





# Vortex Mixers | Accessories



## VT1.2 Tube holding rod

used with tube adapters

**Cat. No.** 18900044

## VT1.3 Universal top plate

Ø 100mm

**Cat. No.** 18900035



## VT1.3.1 tube adapter

for 48 holes test tubes, Ø6mm

**Cat. No.** 18900020



## VT1.3.2 tube adapter

for 15 holes test tubes, Ø10mm

**Cat. No.** 18900021



## VT1.3.3 tube adapter

for 12 holes test tubes, Ø12mm

**Cat. No.** 18900022



## VT1.3.4 tube adapter

for 8 holes test tubes, Ø16mm

**Cat. No.** 18900023



## VT1.3.5 tube adapter

for 8 holes test tubes, Ø20mm

**Cat. No.** 18900024



## VT1.3.6 Platform pad

for <math>\lt; \text{Ø}99\text{mm}</math> tubes and small vessels

**Cat. No.** 18900043



## Application of accessories

Accessories	Adjustable speed model (0-2500rpm)	
	Touch mode (High speed area)	Continuous mode (Low speed area)
VT1.1	Y	Y
VT1.2 + VT1.3.1	Y	
VT1.2 + VT1.3.2	Y	
VT1.2 + VT1.3.3	Y	
VT1.2 + VT1.3.4	Y	
VT1.2 + VT1.3.5	Y	
VT1.3 + VT1.3.6	Y	
VT1.3 + VT1.3.1		Y
VT1.3 + VT1.3.2		Y
VT1.3 + VT1.3.3		Y
VT1.3 + VT1.3.4		Y
VT1.3 + VT1.3.5		Y



## VT1.3.7 vacuum chuck

made of rubber

**Cat. No.** 18900158



# Microplate Mixers

SCIOGEX Microplate Mixer is used for holding single or double microplates. The compact shape of SCI-M Microplate Mixer occupies less bench space and makes the storage easier. It is widely used in life sciences including microbiology, cell and molecular biology, immunology and biotechnology.

## SCI-M Microplate Mixers

### Features:

- A wide range of speed from 0 to 1500rpm
- Used for various mixing applications with optional adapters
- Maintenance-free brushless DC motor



Brushless DC motor



Wide range of accessories



### PS1.2 Microplate clamp

Cat. No.18900042



### PS1.1 Universal top plate

Used with tube adapters

Cat. No.18900067



### VT1.3.1 tube adapter

for 48 holes test tubes, Ø6mm

Cat. No.18900020



### VT1.3.2 tube adapter

for 15 holes test tubes, Ø10mm

Cat. No.18900021



### VT1.3.3 tube adapter

for 12 holes test tubes, Ø12mm

Cat. No.18900022



### VT1.3.4 tube adapter

for 8 holes test tubes, Ø16mm

Cat. No.18900023



### VT1.3.5 tube adapter

for 8 holes test tubes, Ø20mm

Cat. No.18900024



### MXM-116

Double microplate clamps

Cat. No.18900079

### Specifications

Shaking movement	Orbital
Orbital diameter	4.5mm
Max. shaking weight (with accessory)	0.5kg
Motor type	Brushless DC motor
Motor rating input	18W
Motor rating output	10W
Speed range	Single microplate: 0-1500rpm Double microplate: 0-1000rpm
Speed display	Scale
Voltage	100-240V,50/60Hz
Power	20W
Dimension	260×150×80mm
Weight	3kg
Permissible ambient temperature and humidity	5-40°C,80%RH
Protection class	IP21

### SCI-M

Shaking movement	Orbital
Orbital diameter	4.5mm
Max. shaking weight (with accessory)	0.5kg
Motor type	Brushless DC motor
Motor rating input	18W
Motor rating output	10W
Speed range	Single microplate: 0-1500rpm Double microplate: 0-1000rpm
Speed display	Scale
Voltage	100-240V,50/60Hz
Power	20W
Dimension	260×150×80mm
Weight	3kg
Permissible ambient temperature and humidity	5-40°C,80%RH
Protection class	IP21

# Tube Rotators



SCILOGEX rotators give gentle but effective mixing of biological samples held in 1.5mL to 50mL tubes, and are used in a variety of applications including immune precipitations, prevention of blood coagulation, latex diagnostics, etc.

## SCI-RD-Pro LCD Digital Rotator

### Features

- Electronic adjustment of speed and time
- LCD display of speed and time
- Speed range from 10 to 70rpm
- Rolling action, gives gentle but effective mixing
- Adjustable mixing angle from 0 to 90°
- A wide variety of accessories are available

## SCI-RD-E Economical Rotator

### Features

- Provides gentle and effective mixing of biological samples
- Adjustable speed range from 0 to 80rpm
- A wide variety of accessories are available



LCD display



Adjustable angle



Wide range of accessories



### Specifications

	SCI-RD-Pro	SCI-RD-E
Motor type	DC motor	DC motor
Tilt angle	0-90°	-
Speed range	10-70rpm	0-80rpm
Speed display	LCD	Scale
Timer display	LCD	Scale
Timer	1-1199min	-
Operation mode	Continuous / timer	Continuous
Voltage	100-240V, 50/60Hz	100-240V, 50/60Hz
Power	40W	20W
Dimension [DxWxH ]	280x210x300mm	300x220x310mm
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH
Protection class	IP21	IP21

## SCI-RL-Pro LCD Digital Rotator

### Features

- Electronic adjustment of speed and time
- LCD display speed and time
- Speed range from 10 to 70rpm
- Provides gentle but effective rolling
- A wide variety of accessories are available



## SCI-RL-E Economical Rotator

### Features

- Provides gentle but effective rolling
- Adjustable speed range from 0 to 80 rpm
- A wide variety of accessories are available



LCD display



Wide range of accessories



### Specifications

	SCI-RL-Pro	SCI-RL-E
Motor type	DC motor	DC motor
Speed range	10-70rpm	0-80rpm
Speed display	LCD	Scale
Timer display	LCD	Scale
Timer	1-1199min	-
Operation mode	Continuous/timer	Continuous
Voltage	100-240V, 50/60Hz	100-240V, 50/60Hz
Power	40W	20W
Dimension[D×W×H]	220×510×260mm	150×530×190mm
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH
Protection class	IP21	IP21


# Tube Rotators | Accessories



## Disk Accessories Type-1

Used for SCI-RD-Pro  
for 1.5mLx60 centrifuge tubes holder


**Cat. No.**  
18900160



## Disk Accessories Type-2

Used for SCI-RD-Pro  
for 15mLx16 centrifuge tubes holder

**Cat. No.**  
18900161



## Disk Accessories Type-3

Used for SCI-RD-Pro  
for 50mLx8 centrifuge tubes holder

**Cat. No.**  
18900162



## Disk support rods

4pcs in a group  
use with disk accessories

**Cat. No.**  
18900140



## Rotisserie Accessory Type-1

Used for SCI-RL-Pro, for 1.5mLx48  
centrifuge tubes held horizontally

**Cat. No.**  
18900142



## Rotisserie Accessory Type-2

Used for SCI-RL-Pro, for 15mLx24  
centrifuge tubes held horizontally

**Cat. No.**  
18900143



## Rotisserie Accessory Type-3

Used for SCI-RL-Pro, for 50mLx24  
centrifuge tubes held horizontally

**Cat. No.**  
18900144



## Rotisserie Accessory Type-4

Used for SCI-RL-Pro, for 1.5mLx32  
centrifuge tubes held vertically

**Cat. No.**  
18900145



## Rotisserie Accessory Type-5

Used for SCI-RL-Pro, for 15mLx16  
centrifuge tubes held vertically

**Cat. No.**  
18900146



## Rotisserie Accessory Type-6

Used for SCI-RL-Pro, for 50mLx16  
centrifuge tubes held vertically

**Cat. No.**  
18900147



## Plastic Clips

Used with SCI-RL-E/sci-RD-E  
Disk/Rotisserie accessory, for  
50mL, 15mL and 1.5mL  
centrifuge tubes





## SCI-T6-Pro LCD Digital Tube Roller

### Features

- LCD displays the speed and time
- Speed range of 10-70rpm
- Six roller design for gentle rolling and easy to clean
- Continuous or timer operation

SCILOGEX tube rollers provide a gentle and highly efficient rolling motions, ideal for mixing blood samples, viscous substances and liquid-solid suspensions. Used in a variety of applications, such as the prevention of blood coagulation, immune precipitation, etc.



LCD display



Timer

## SCI-T6-S Tube Roller

### Features

- Speed range of 0-70rpm
- Six roller design for gentle rolling and easy to clean



### Specifications

	SCI-T6-Pro	SCI-T6-S
Amplitude	24mm	24mm
Motor type	DC motor	DC motor
Rocking motion	Rocking and rolling	Rocking and rolling
Max. load capacity	4kg	4kg
Number of rollers	6	6
Roller size[length]	280mm	280mm
Speed range	10 -70rpm	0-70rpm
Speed display	LCD	Scale
Timer	Yes	-
Timer display	LCD	-
Time setting range	1-1199min	-
Operation mode	Continuous/timer	Continuous
Voltage	100-240V,50/60Hz	100-240V,50/60Hz
Power	30W	25W
Dimension [D×W×H]	450×260×120mm	450×260×120mm
Weight	5.1kg	4.5kg
Permissible ambient temperature and humidity	5-40°C,80%RH	5-40°C,80%RH
Protection class	IP21	IP21

# Shakers

SCIOLOGEX orbital and linear shakers are ideal for almost any vessel from microcentrifuge tubes through petri dishes and microtitre plates to conical flasks.

## SCI-O330-Pro

## SCI-O180-Pro

### LCD Digital Orbital Shaker

#### Features

- Max. load capacity is 7.5kg(O330) and 2.5kg(O180) with platform
- Double LCDs for independent display of time and speed
- Used with a wide variety of accessories
- Maintenance- free brushless DC motor
- Over speed detection and protection
- Remote function provides PC control and data transmission

SHOWN WITH OPTIONAL  
UNIVERSAL PLATFORM



## SCI-O180-S

### LED Digital Orbital Shaker

#### Features

- Max. load capacity is 3kg with platform
- Double LEDs for independent display of time and speed
- Speed range of 40-200rpm
- Wide range of platforms for use with a variety of vessels

## SCI-O180-E

### Economical Digital Orbital Shaker

#### Features

- Max. load capacity is 3kg with platform
- Speed range of 0-200rpm
- Wide range of platforms for use with a variety of vessels





Timer



Wide range of accessories



## Specifications

	SCI-O330-Pro	SCI-O180-Pro	SCI-O180-S	SCI-O180-E
Orbital diameter	10mm	4mm	20mm	20mm
Max. load capacity (with platform)	7.5kg	2.5kg	3kg	3kg
Motor type	Brushless DC motor	Brushless DC motor	DC motor	DC motor
Motor input power	28W	28W	16W	16W
Motor output power	15W	15W	10W	10W
Speed range	100-500rpm	100-800rpm	40-200rpm	0-200rpm
Speed display	LCD	LCD	LED	scale
Timer display	LCD	LCD	LED	-
Time settings range	1min-19h59min	1min-19h59min	1min-19h59min	-
Voltage	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz
Power	30W	30W	20W	20W
Weight	13.5kg	8.1kg	3.1kg	3.1kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C,80%RH	5-40°C, 80%RH
Dimension[WxDxH]	370×420×100mm	300×340×100mm	270×330×110mm	270×330×110mm
Protection class	IP21	IP21	IP21	IP21
Data connector	RS232	RS232	-	-





# Shakers

## SCI-L330-Pro

## SCI-L180-Pro

### LCD Digital Linear Shaker

#### Features

- Max. load capacity is 7.5kg(L330) and 2.5kg(L180) with platform
- Double LCDs for independent display of time and speed
- Wide range of platforms for use with a variety of vessels
- Maintenance- free brushless DC motor
- Over speed detection and protection

SHOWN WITH OPTIONAL  
UNIVERSAL PLATFORM



## SCI-L180-S

### LED Digital Linear Shaker

#### Features

- Max. load capacity is 3kg with platform
- Double LEDs for independent display of time and speed
- Speed range of 40-200 rpm
- Wide range of platforms for use with a variety of vessels



## SCI-L180-E

### Economical digital Linear Shaker

#### Features:

- Max. load capacity is 3kg with platform
- Speed range of 0-200 rpm
- Wide range of platforms for use with a variety of vessels





Timer



Wide range of accessories



## Specifications

	SCI-L330-Pro	SCI-L180-Pro	SCI-L180-S	SCI-L180-E
Amplitude	10mm	4mm	20mm	20mm
Max. load capacity (with platform)	7.5kg	2.5kg	3kg	3kg
Motor type	Brushless DC motor	Brushless DC motor	DC motor	DC motor
Motor input power	28W	28W	16W	16W
Motor output power	15W	15W	10W	10W
Speed range	100-350rpm	100-350rpm	40-200rpm	0-200rpm
Speed display	LCD	LCD	LED	scale
Timer display	LCD	LCD	LED	-
Time settings range	1min-19h59min	1min-19h59min	1min-19h59min	-
Voltage	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Power	30W	30W	20W	20W
Weight	13.5kg	8.1kg	3.1kg	3.1kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C, 80%RH
Dimension[WxDxH]	370x420x100mm	300x340x100mm	270x330x110mm	270x330x110mm
Protection class	IP21	IP21	IP21	IP21
Data connector	RS232	RS232	-	-

# Shakers | Accessories



SK330.5



SK180.4



SK180.5



SK180.6



SK330.1



SK330.3



SK180.1



SK180.3



Cat. No.

Description

SCI-O330-Pro  
SCI-L330-Pro  
SCI-R-Pro  
SCI-3D-Pro

SCIO180-Pro/S/E  
SCI-L180-Pro/S/E  
SCI-RS/RE  
SCI-3DS/3DE

18900155

Dish platform with non-slip mat and fixed string (8pcs)  
Dimension[WxD]: 30x28.5cm



18900185

Dish attachment with non-slip mat  
Dimension[WxD]: 24x21.5cm



18900200

Large size dish attachment with non-slip mat  
Dimension[WxD]: 30x23cm



18900326

Dish attachment with non-slip mat  
Dimension[WxD]: 28x28cm



18900027

Universal attachment with 4 bars  
Dimension[WxD]: 30x30cm



18900040

Lengthways roller attachment  
Dimension[WxD]: 30x30cm



18900025

Universal attachment with 3 bars  
Dimension[WxD]: 24x24cm



18900038

Lengthways roller attachment  
Dimension[WxD]: 24x24cm



18900036

Bar for SCI330.1 universal attachment



18900037

Bar for SCI180.1 universal attachment



18900280

Supports for double platforms






SK330.2



SK180.2



Cat. No.	Description	SCI-O330-Pro SCI-L330-Pro SCI-R-Pro SCI-3D-Pro	SCI-O180-Pro/S/E SCI-L180-Pro/S/E SCI-RS-S/E SCI-RS
18900028	Fixing clip attachment	■	
18900026	Fixing clip attachment		■
18900029	Fixing clip for flask volume 25mL, used with SCI330.2[28pcs] SCI180.2[9pcs]	■	■
18900030	Fixing clip for flask volume 50mL, used with SCI330.2[16pcs] SCI180.2[9pcs]	■	■
18900031	Fixing clip for flask volume 100mL, used with SCI330.2[16pcs] SCI180.2 [9pcs]	■	■
18900032	Fixing clip for flask volume 200/250 mL, used with SCI330.2[9pcs] SCI180.2[4pcs]	■	■
18900033	Fixing clip for flask volume 500mL, used with SCI330.2[9pcs] SCI180.2[2pcs]	■	■

# Rockers

SCIOGEX see-saw and 3D rockers provide perfect solution in electrophoresis gel dyeing/dicoloration, sample washing, molecular hybridization, immunoprecipitation, Western blot and cell culture.

## SCI-R-Pro LCD Digital See-saw Rocker

### Features

- Rocking motion angle 9°
- Max. load capacity is 10kg with platform
- Speed range of 10-70rpm
- Double LCDs for independent display of time and speed
- Wide range of platforms for use with a variety of vessels



## SCI-RE Economical See-saw Rocker

### Features:

- Rocking motion angle 7°
- Max. load capacity is 3kg with platform
- Speed range of 0-80rpm
- Wide range of platforms for use with a variety of vessels

## SCI-RS LED Digital See-saw Rocker

### Features

- Rocking motion angle 7°
- Max. load capacity is 3kg with platform
- Speed range of 10-80rpm
- Double LEDs for independent display of time and speed
- Wide range of platforms for use with a variety of vessels





Timer



Wide range of accessories



## Specifications

	SCI-R-Pro	SCI-R-S	SCI-R-E
Tilt angle	9°	7°	7°
Max. load capacity (with platform)	10kg	3kg	3kg
Motor type	DC motor	DC motor	DC motor
Motor input power	40W	16W	16W
Motor output power	24W	10W	10W
Speed range	10-70rpm	10-80rpm	0-80rpm
Speed display	LCD	LED	-
Timer display	LCD	LED	-
Time settings range	1min-19h59min	1min-19h59min	-
Voltage	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Power	50W	20W	20W
Weight	9kg	3.2kg	3.2kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C, 80%RH
Dimension[WxDxH]	360×410×200mm	270×330×130mm	270×330×130mm
Protection class	IP21	IP21	IP21



## Rockers



### SCI-3D-Pro LCD Digital 3D Rocker

#### Features

- Three-dimensional rocking motion with an angle of 9°
- Max. load capacity is 5kg with platform
- Speed range of 10-70rpm
- Double LCDs for independent display of time and speed
- Various of platform accessories

### SCI-3DS LED Digital 3D rocker

#### Features

- Three-dimensional rocking motion with the angle of 7°
- Max. load capacity is 3kg with platform
- Speed range of 10-80rpm
- Double LEDs for independent display of time and speed
- Various of platform accessories



### SCI-3DE Economical 3D Rocker

#### Features

- Three-dimensional rocking motion with the angle of 7°
- Max. load capacity is 3kg with platform
- Speed range of 0-80rpm
- Wide range of platforms for use with a variety of vessels





Timer



Wide range of accessories



## Specifications

	SCI-3D-Pro	SCI-3DS	SCI-3DE
Tilt angle	9°	7°	7°
Max. load capacity (with platform)	5kg	3kg	3kg
Motor type	DC motor	DC motor	DC motor
Motor input power	40W	16W	16W
Motor output power	24W	10W	10W
Speed range	10-70rpm	10-80rpm	0-80rpm
Speed display	LCD	LED	scale
Timer display	LCD	LED	-
Time settings range	1min-19h59min	1min-19h59min	-
Voltage	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Power	50W	20W	20W
Weight	9kg	2.7kg	2.7kg
Permissible ambient temperature and humidity	5-40°C, 80%RH	5-40°C, 80%RH	5-40°C, 80%RH
Dimension[WxDxH]	360×430×106mm	270×330×130mm	270×330×130mm
Protection class	IP21	IP21	IP21
Data connector	-	-	-



# Homogenizers

## D-160

### Handheld Homogenizer

#### Features:

- Ideal for manual operation due to its light weight and ergonomic design
- Processing range: 0.1-50mL or 1-250mL
- 316L stainless steel shafts are fully autoclavable and inert for highly corrosive solutions
- All shafts are interchangeable for easy dismantling and cleaning.
- 6 modes of motor speed from 8,000 to 30,000 rpm



#### Specifications

Power Supply	110-120V/60Hz 220-240V / 50-60 Hz	110-120V/60Hz 220-240V/50-60 Hz
Motor Type	Universal motor AC carbon brush motor	500 W AC carbon brush motor
Speed Range	8000-30000rpm	10000-30000rpm
Max. Circum. Speed	6.3-14m/sec	22.7-36m/sec
Speed Control	Dial knob	6 stage
Working Volume [ H <sub>2</sub> O]	0.1-50mL (Dispersing shaft DS-160/5) 1-250mL (Dispersing shaft DS-160/10)	10-40000mL (Optional)
Max. Viscosity	5,000mPas	10,000 mPas
Material of Dispersing Shaft	SS 316L stainless steel, PTFE	SS 316L stainless steel, PTFE
Weight	0.6 kg	1.3 kg
Dimension [L x W x H]	46mm x 55mm x 230mm	70mm x 70mm x 255mm
Noise	72 dB(A)	79 dB(A)
Operating Environment	0-40°C, 85% rel. humidity	0-40°C, 85% rel. humidity
Protection Class	IP20	IP20


## D-500

### Homogenizer

#### Features:

- Viscosity up to 10,000 mPas
- 6 modes of motor speed from 10,000 to 30,000 rpm
- All-round safety guarantee for motor drive, overload protection and smooth operation
- 316L stainless steel shafts are fully autoclavable and inert for highly corrosive solutions
- Easy dismantling for fast preparation
- All shafts are interchangeable for easy dismantling and cleaning

	D-160	D-500
Power Supply	110-120V/60Hz 220-240V / 50-60 Hz	110-120V/60Hz 220-240V/50-60 Hz
Motor Type	160 W AC carbon brush motor	500 W AC carbon brush motor
Speed Range	8000-30000rpm	10000-30000rpm
Max. Circum. Speed	6.3-14m/sec	22.7-36m/sec
Speed Control	Dial knob	6 stage
Working Volume [ H <sub>2</sub> O]	0.1-50mL (Dispersing shaft DS-160/5) 1-250mL (Dispersing shaft DS-160/10)	10-40000mL (Optional)
Max. Viscosity	5,000mPas	10,000 mPas
Material of Dispersing Shaft	SS 316L stainless steel, PTFE	SS 316L stainless steel, PTFE
Weight	0.6 kg	1.3 kg
Dimension [L x W x H]	46mm x 55mm x 230mm	70mm x 70mm x 255mm
Noise	72 dB(A)	79 dB(A)
Operating Environment	0-40°C, 85% rel. humidity	0-40°C, 85% rel. humidity
Protection Class	IP20	IP20

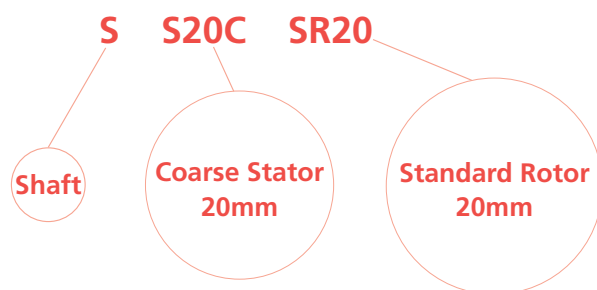

## D-500 Homogenizer

### DS-500/1

Volume 10-5000mL  
Max. Circum. Speed 22.7m/sec  
**Material:** 316L  
**Application:** for solid/liquid media

**Cat. No.**  
18201331



### DS-500/2

Volume 10-5000mL  
Max. Circum. Speed 22.7m/sec  
**Material:** 316L  
**Application:** for water and oil mixing

**Cat. No.**  
18201332



### DS-500/5

Volume 10-5000mL  
Max. Circum. Speed 5,8m/sec  
**Material:** 316L  
**Application:** Ideal for all homogenizing applications such as tissue homogenization, cell disruption, suspensions and clinical and medical diagnostics

**Cat. No.**  
18900117



## D-160 Handheld Homogenizer

### DS-160/5

Volume 0.1-50ml  
Max. Circum. Speed 6.3m/sec  
**Material:** 316L  
**Application:** small amounts of solid-liquid mixed

### DS-160/10

Volume 1-250mL  
Max. Circum. Speed 22.7m/sec  
**Material:** 316L  
**Application:** small amounts of solid-liquid mixed

**Cat. No.**  
18201329

**Cat. No.**  
18201330



### Stator



S20C



S20F



S30C



S30F



S40C

### Rotor



SR20



SR30



CR20



CR30



MR20



MR30



ER20



ER30



# Centrifuges



# Mini Micro Centrifuges

## Ezee series Mini Micro Centrifuge

### Features

- Ideal for microfiltration and quick spin-downs
- Easy-to-use with dual start/stop function
- 7000rpm fixed speed
- Compatible with 2mLx8 and PCR8x2 rotors
- Quiet running, noise level  $\leq 45$ dB
- Rotor change without tools
- Accelerates and brakes in seconds
- Available in two colors i.e., green, blue



Quiet operation



Vibration free



CE  FC

### Specifications

	Ezee
Max. Speed	7000rpm
Max. RCF	2680xg
Rotor Capacity	0.2/0.5/1.5/2.0mLx8; 0.2mLx16 PCR strips or 0.2mLx2 PCR 8 strips
Run Time	Continuous operation
Driving Motor	DC motor
Power	AC100-240V/50Hz/60Hz 20W
Noise Level	$\leq 45$ dB
Dimension [DxWxH]	160x170x122mm
Weight	0.5kg
Certification	CE cTUVus FCC MCA

## Available rotors



### A08-2

**Cat. No.** 19400015

Max. speed: 7000rpm  
Max. RCF: 2680×g  
Rotor capacity: 2mL/1.5mL×8, 0.2mL×8, 0.5mL×8  
Rotor material: High strength plastic  
Available rotor adapters: SA02P2, SA05P2



### A02-PCR8

**Cat. No.** 19400017

Max. speed: 7000rpm  
Max. RCF: 2680×g  
Rotor capacity: 0.2mL×16 PCR strips, 0.2 mL×2 PCR 8 strips  
Rotor material: High strength plastic

## Available adapters



### SA02P2

**Cat. No.** 19400029

0.2mL rotor adapter  
Used with A08-2 rotor  
8pcs/pk



### SA05P2

**Cat. No.** 19400026

0.5mL rotor adapter  
Used with A08-2 rotor  
8pcs/pk

# High Speed Micro-Centrifuges

## High Speed Micro Centrifuge

High speed micro centrifuges are widely used in physical and chemical analysis, biochemistry, cellular and molecular biology, clinical Labs ideal for high-end research applications

- Sedimentation of cells and viruses
- Separation of sub-cellular organelles
- Isolation of macromolecules such as DNA, RNA, proteins or lipids

## Precise control

- Brushless DC motor accelerates quickly to the set speed
- High accuracy of speed in  $\pm 20$  rpm
- Digital timer adjustable from 30 sec. to 99 min or set for continuous run
- Timer starts only when the set speed is achieved and then maintains the accuracy of separation time.

## Conforms to international safety standards and regulations

- SCIOLOGEX centrifuges pass CE, cTUVus and FCC requirements. certifications, they are certified by TUV. All SCIOLOGEX test items are proven with the high level of reliability and confidence according to IEC/EN 61010-1, and pass MCA test according to IEC/EN61010-2-20, including rotor containment and bio-safe tests.
- Quiet operation, maximum reliability
- High strength metal casing ensures security during centrifugal process
- Dual door interlock design for safety(D3024 & D3024R)
- Gentle braking at low speed with efficient separation

## Ergonomic design

- User-friendly large LCD display shows real-time information
- Both RPM or G-force can be set and displayed
- The parameters can be modified after the set speed is reached.
- The short spin function is used for quick spins by pressing and holding PULSE key. The centrifuge speed can be accelerated and held at the target speed
- Automatic lid-lock release prevents sample warming and allows easy access(excluding D3024R)
- Concise display and Sound-alert



# SCI-12 High Speed Mini Centrifuge



Brushless DC motor



LCD display



## Specifications

### SCI-12

Max. Speed	15000rpm(500-15000rpm), increment: 100rpm
Max. RCF	15100xg, increment: 100xg
Speed Accuracy	±20rpm
Rotor Capacity	0.2mL/0.5mL/1.5mL/2mL×12
Run Time	30sec-99min/Continuous
Driving Motor	Brushless DC motor
Safety Devices	Door interlock, Over-speed detection, Over-temperature detection, Automatic internal diagnosis
Power	Single-phase, AC100V-240V, 50Hz/60Hz, 3A 100W
Noise level	≤54dB
Acceleration /Braking time	11s ↑ /9s ↓
Dimension[D×W×H]	255×245×140mm
Weight	6kg
Certification	EMC, CE, FCC, ICES, cTUVus, CB
Advanced features	Speed/RCF switch, Short-time run function, sound-alert function

## Features

- Powerful centrifugal force of 15100xg and max. speed of 15000rpm ideal for various applications
- Brushless DC motor drive quickly accelerates the rotor to set speed
- Quiet working, Low noise ≤56dB
- SCI-12 is proven by IEC/EN 61010-1
- SCI-12 Plus passed the rigorous rotor containment test and accredited with CE, cTUVus, FCC certificates, and MCA test. MCA test according to IEC/EN61010-2-20

## Available rotors



Cat. No. 19400010

### A12-2P for SCI-12

Max. speed: 15000rpm  
Max. RCF: 15100xg  
Rotor capacity: 2mL/1.5mL×12,0.2mL×12,0.5mL×12  
Rotor material: High strength plastic  
Available rotor adapters: A02P2,A05P2

## Available adapters



Cat. No. 19500001

### A02P2

0.2mL rotor adapter  
Used with A12-2, A12-2P, AS24-2 and A24-2P rotors  
24 pcs/pk

Cat. No. 19500002

### A05P2

0.5mL rotor adapter  
Used with A12-2,A12-2P, AS24-2 and A24-2P rotors  
24 pcs/pk

### SCI-24 High Speed Micro Centrifuge

#### Unique Features

- Special multi-flow air cooling design with patent ensures fast cooling of the rotor and low energy consumption
- Temperature display appropriate for gentle handling of sensitive samples
- Three-layer sealed rotor prevents accidental leakage during centrifugal process allowing risk-free microbial contamination
- High strength aluminum alloy rotor can be fully autoclaved for unlimited service life
- Four rotors are optional complete with 24 places 1.5/2.0mL tubes, bigger 5.0mL, smaller 0.2mL and 0.5mL tubes with adapters



### SCI-24R High Speed Refrigerated Micro Centrifuge

#### Powerful cooling system for precise temperature control

- Pre-cooling program ensures optimal protection of the sample before warming
- Guaranteed 4°C cooling within only 7 minutes of both chamber and samples even at maximum speed and capacity utilization
- Sound-alert allows your undivided attention on other tasks warning
- Lid lock facility allows for internal temperature maintenance even after centrifugation
- Intermittent temperature control mode, CFC-free refrigerant and low carbon life rotor capacity
- Three-layer sealed rotor prevents accidental leakage during centrifugal process allowing risk-free microbial contamination
- High strength aluminum alloy rotor can be fully autoclaved for unlimited service life
- Four rotors are optional complete with 24 place 1.5/2.0mL tubes, bigger 5.0mL, smaller 0.2mL and 0.5mL tubes with the use of adapters
- Quiet running, noise level  $\leq 54$ dB



# SCI-24 series



Brushless DC motor



Wide range of rotors



CE FC



CE FC

## Specifications

	SCI-24	SCI-24R
Max. Speed	15000rpm(200-15000rpm), increment:10rpm	15000rpm(200-15000rpm), increment:10rpm
Max. RCF	21380xg, increment:10xg	21380xg, increment: 10xg
Speed Accuracy	±20 rpm	±20 rpm
Temperature Range	-	-20°C-40°C
Rotor Capacity	5mLx18, 5mL culture tubex12 0.2mL/0.5mL/1.5mL/ 2mLx24, 0.5mLx36, PCR8x4	5mLx18, 5mL culture tubex12 0.2mL/0.5mL/1.5mL/ 2mLx24, 0.5mLx36, PCR8x4
Run Time	30sec-99min/Continuous	30sec-99min/Continuous
Motor	Brushless DC motor	Brushless DC motor
Safety Devices	Dual door interlock, Over-speed detection, Automatic internal diagnosis	Dual door interlock, Over-speed detection, Over-temperature detection, Automatic internal diagnosis
Power	Single-phase, AC200V-400V, 50Hz/60Hz, 5A, AC100V-120V, 50Hz/60Hz, 8A 200W	Single-phase, AC200V-240V, 50Hz/60Hz, 10A, AC100V-120V, 50Hz/60Hz, 10A 400W
Acceleration /Braking time [Sec]	25s ↑ 25s ↓	25s ↑ 25s ↓
Dimension[WxDxH]	280x364x266mm	338x580x324mm
Weight	12kg	30kg
Certification	CE cTUVus FCC MCA	CE cTUVus FCC MCA
Advanced Features	Speed/RCF switch; Short-time run function; sound-alert function	Speed/RCF switch; Short-time run function; sound-alert function
Noise Level	≤ 64dB	≤ 56dB





## SCI24 Rotor Features

### Fully autoclavable

High strength aluminum alloy rotors are fully autoclavable, withstanding steam sterilizing at 121°C for 20 minutes, with unlimited service life.

### Bio-safe

Aspired to be the top-of-the-line model, **SCI-24 & SCI24-R** rotors are designed to prevent sample leakage. Each and every rotor is hermetically sealed by three rubber seals.

### Chamber-protection

SCILOGEX centrifuges are constructed under MCA conditions according to IEC/EN61010-2-20, causing disruption by partially cutting and overloading the rotor assembly, with no parts passing through the chamber which might cause danger to a person or the environment.

SCILOGEX rotors are manufactured from military-industrial grade aluminum alloy with high mechanical strength for precise running and safety (excludes **SCI-24**)

Every rotor can reach a max. speed of 15000rpm


Rotors are seated on a tapered shaft, concentric and self-aligning, perfect to achieve running stability at high speeds

**SCI-24 & SCI24-R** with bio-safe rotors/anti-sample overflow prevents accidental leakage and risk free centrifugal process microbial contamination. **SCI-24 & SCI-24R** rotors have passed MCA test according to IEC/EN61010-2-20, including explosion-proof and bio-safe tests

High strength aluminum alloy rotors are fully autoclavable and provide unlimited service life (D2012 plus rotor not included)

Powerful cooling system minimizes rotor heating. **SCI-24** rotors heat up to > 10°C and **SCI-12** rotors less than 8°C after running an hour

Three rubber seals fitted to achieve bio-safe condition

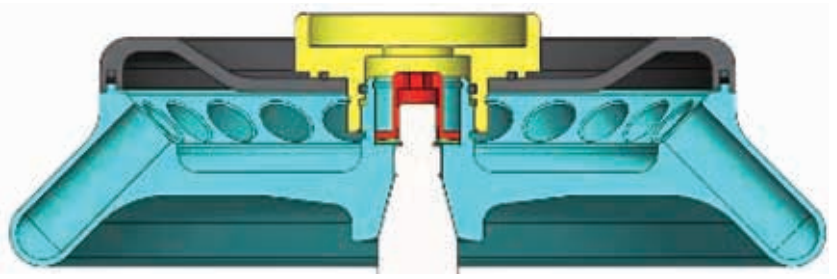

Seals within the aluminum alloy rotor



## Rotors



**Cat. No.** 19400006

### AS24-2

for SCI -24 & SCI-24R

Max. speed: 15000rpm  
 Max. RCF: 21380×g  
 Rotor capacity: 2mL/1.5mL×24/0.2mL×24/0.5mL×24  
 Rotor material: Aluminum alloy  
 Bio-safe(Bio sealing): Yes  
 Available rotor adapters: A02P2,A05P2



**Cat. No.** 19400032

### AS12-V5

for SCI -24 & SCI-24R

Max. speed: 15000rpm  
 Max. RCF: 21380×g  
 Rotor capacity: 5mL×12(Eppendorf tube)  
 Rotor material: Aluminum alloy  
 Bio-safe(Bio sealing): Yes



**Cat. No.** 19400007

### AS36-05

for SCI -24 & SCI-24R

Max. speed: 15000rpm  
 Max. RCF: 21380×g  
 Rotor capacity: 0.5mL×36,0.2mL×36  
 Rotor material: Aluminum alloy  
 Bio-safe(Bio sealing): Yes  
 Available rotor adapters: A02P05



**Cat. No.** 19400008

### AS4-PCR8

for SCI -24 & SCI-24R

Max. speed: 15000rpm  
 Max. RCF: 21380×g  
 Rotor capacity: 0.2mL/PCR8×4  
 Rotor material: Aluminum alloy  
 Bio-safe(Bio sealing): Yes

# SCI24 series | Rotors and Adapters



**Cat. No.** 19400012

## AS18-5 for SCI -24 & SCI-24R

Max. speed :15000rpm  
Max. RCF:21380×g  
Rotor capacity:5mL×18 ( Round-Botton tube )  
Rotor material:Aluminum alloy  
Bio-safe(Bio sealing):Yes

## Adapters



**Cat. No.** 19500001

## A02P2

0.2mL rotor adapter  
Used with A12-2, A12-2P, AS24-2 and A24-2P rotors  
24pcs/pk



**Cat. No.** 19500002

## A05P2

0.5mL rotor adapter  
Used with A12-2, A12-2P, AS24-2 and A24-2P rotors  
24pcs/pk



**Cat. No.** 19500003

## A02P05

0.2mL rotor adapter  
Used with AS36-05 rotor  
36pcs/pk



# Hematocrit Centrifuges

SCIOGEX hematocrit centrifuge with AC24P hematocrit rotor is used for determination of volume fractions of erythrocytes in blood for diagnostic purposes and doping tests. Also it is used for the photometric determination of bilirubin content in neonate blood samples. Hematocrit centrifuge with A24-2P tube rotor, can be used for extraction of DNA and RNA.



## SCI24-H Hematocrit Centrifuge

### Features:

- Speed range of 200-14000rpm, max. RCF 18620×g
- Precise control of speed and time separately
- Easy operation with intuitive menu and easy-to-read display
- Maintenance-free brushless DC motors
- Pulse operation for quick spins
- Rotor capacity: Hematocrit rotor:
- Hematocrit rotor: 24 capillary max. speed: 12000rpm
- Tube rotor: 1.5/2mL×24 max. speed: 14000rpm



## SCI24-EH Economical Hematocrit Centrifuge

### Features:

- Max. speed is 12000rpm, max. RCF 13680×g
- Precise control of speed and time separately
- Rotor capacity: Hematocrit rotor: 24 capillary

### Specifications

	SCI24-H	SCI24-EH
Speed Range	200-14000rpm, increment: 10rpm	500-12000rpm, increment: 100rpm
Max. RCF	18620×g	13680×g
Speed Accuracy	±20	±100
Rotor Capacity	24 capilleries	24 capilleries
Run Time	30sec-99min/Continuous	10sec-99min/Continuous
Motor	Brushless DC motor	Brushless DC motor
Display	LCD	LCD
Safety Devices	Door interlock, Overspeed detector; Automatic internal diagnosis, Automatic rotor identification	Door interlock, Imbalance protection
Acceleration/Braking time	30s ↑ 30s ↓	40s ↑ 40s ↓
Power	Single-phase, 200V-240V, 50Hz/60Hz, 5A; 100V-120V, 50Hz/60Hz, 5A 160W	Single-phase, 200V-240V, 50Hz/60Hz, 5A; 380W
Dimension[WxDxH]	280×364×274mm	280×364×213mm
Weight	10kg	10kg
Certification	CE cTUVus FCC MCA IVD	-
Advanced features	Speed/RCF switch; Short-time run function; sound-alert function	Speed/RCF switch; Short-time run function; sound-alert function

## Available rotors



**Cat. No.** 19400013

### A24- 2P SCI24-H

Max. speed: 14000rpm  
Max. RCF: 18620×g  
Rotor capacity: 2mL/1.5mL×24,0.2mL×24,0.5mL×24  
Rotor material: High strength plastic  
Available rotor adapters: A02P2,A05P2,A10P15 & Mat



**Cat. No.** 19400047

### AC24 SCI24-H & SCI24-EH

Max. speed: 12000rpm  
Max. RCF: 13680×g  
Rotor capacity: capillary tubes x24  
Rotor material: High strength aluminum

## Available adapters



**Cat. No.** 19500001

### A02P2

2mL to 0.2mL rotor adapter, used with A12-2, A12-2P, AS24-2 and A24-2P rotors, 24pcs/pk



**Cat. No.** 19500002

### A05P2

2mL to 0.5mL rotor adapter, used with A12-2, A12-2P, AS24-2 and A24-2P rotors, 24pcs/pk



**Cat. No.** 19500003

### A02P05

Rotor adapter, used with A12-10P, 12pcs/pk

# Clinical Centrifuges

SCIOLOGEX centrifuges are widely used in the separation of serum, plasma, urea, blood samples and other routine applications in hospital and research laboratories.

## Conforms to international safety standards and regulations

- SCIOLOGEX Low-speed centrifuges are marked with CE, cTUVus and FCC, and pass the rotor containment test / MCA test according to IEC/EN61010-2-20
- Passed EN61010-2-101:2002 particular requirements for In-vitro diagnostic (IVD) medical equipment
- High strength plastic rotor gives excellent balance to guarantee stable operation
- Dual protection housing particularly advantageous for safe running
- Brushless DC motor precisely accelerates to the set speed

## Precise control

- Powerful CPU for easy operation of speed, time and all other parameters
- High accuracy of speed
- Digital timer adjustable from 30 sec. to 99 min or set for continuous run
- Gentle braking at low speeds with efficient separation

## Ergonomic design

- Easy operation thanks to intuitive menu and easy-to-read display
- RPM or G-force can be set and displayed
- Parameters can be modified after the set speed is reached
- Pressing and holding PULSE key for quick spin function
- Automatic lid-lock release
- Easy-to-read processing display and sound alert



SCIOGEX **SCI412 & SCI412-S** Low-speed centrifuges support small volumes applications . The centrifuges are supplied with an angle rotor that can hold up to 50mL×6, 15mL×6 (A6-50P ),15mL×8, or 10mL/7mL/5mL×12 (A12-10P ) vacuum tubes. They are widely used in medical and veterinary practices for the centrifugation of blood and urine samples in qualitative analysis of water and soil samples. These centrifuges are also used in universities and other research institutes

### SCI412 Low-speed Centrifuge

#### Features:

- Easy programming to achieve high accuracy of speed control
- Easy operation with intuitive menu and easy-to-read display
- Rotor speed can be set and displayed by RPM or G-force
- Maintenance-free brushless DC motors
- Quick spin function with press and hold pulse key
- Lid with electric lock and automatic release function saves processing time and prevents samples overheating
- Automatic self-diagnosis on startup showing accumulative running time and last running parameters
- Braking time 2 gears adjustable(for A6-50P rotor)
- A12-10P and A6-50P are not interchangeable



### SCI412-S Economical Low-speed Centrifuge

#### Features:

- speed range of 300-4500rpm
- Individual control of speed and time
- Faster acceleration and deceleration
- Perfectly suitable for 15mL cell culture tubes and a full line of collection tubes





# SCI412 series



CE

## Specifications

	SCI412	SCI412-S
Speed Range	300-4500rpm, increment: 100rpm	300-4500rpm, increment:100rpm
Max. RCF	2490×g	2490×g
Speed accuracy	±20rpm	±100rpm
Rotor type	A12-10P, A6-50P	A12-10P
Run Time	30sec-99min HOLD(Continuous operation)	1sec-99min HOLD(Continuous operation)
Motor	Brushless DC motor	DC motor
Display	LCD	LED
Safety Devices	Door interlock, Overspeed detector; Automatic internal diagnosis	Door interlock, Over-speed detection
Acceleration/Braking time	A12-10P: 20s ↑ 13s ↓ A6-50P: 20s ↑ 20s / 90s ↓	23s ↑ 23s ↓
Power	Single-phase, 100V-240V, 50Hz/60Hz, 3A 70W	Single-phase, 200V-240V, 50Hz/60Hz, 3A; 100V-120V, 50Hz/60Hz, 3A 70W
Dimension[WxDxH]	301×354×217mm	301×354×217mm
Weight	6kg	6kg
Certification	CE, UL, IVD	-
Advanced features	Speed/RCF switch; Short-time run function; sound-alert function	sound-alert function



# SCI412 series | Rotors and Adapters

## Available rotors



Cat. No. 19200348

### A12-10P for SCI412 & SCI412-S











Max. speed: 4500rpm  
Max. RCF: 2490×g  
Rotor capacity: 8×15mL, 12×10mL  
Rotor material: High strength plastic



Cat. No. 19100197

### A6-50P For SCI412(A6-50P)

Max. speed: 4000rpm  
Max. RCF: 1800×g  
Rotor capacity: 50ml×6, 15ml×6  
Rotor material: High strength plastic

Available tubes	Tube quantity	Dimension (ΦL×mm)	Adapters	Maximum speed(rpm)	Radius (cm)	Maximum RCF (×g)
15mL con 	8	17×120		4500	11	2490
1.5-5mL vacu 	12	13×75	A10P15 & Plug 	4500	9.8	2218
4-7 mL vacu 	12	13×100	A10P15 	4500	11	2490
		16×75			9.8	2218
8.5-10 mL vacu 	12	16×107		4500	11	2490
2.7-3 mL(EU) collection tube 	12	11×66	A10P15 & Plug 	4500	9.8	2218
7.5-8.2 mL(EU) collection tube 	12	15×92	A10P15 	4500	11	2490

Note: Made of plastic, A12-10P rotor cannot be autoclaved or applied with UV irradiation. Regular sterilization is recommended.

# Multi-Purpose Low Speed Centrifuge

## SCI636

SCIOLOGEX **SCI636** Multi-Purpose Low-speed Centrifuge is ideal for the centrifugation of samples in clinical chemistry, cytology, research laboratories, industrial laboratories, etc. This centrifuge is suitable for tubes with caps, blood collection or urine tubes. Swing-out bucket rotors and adapters can be compatible with standard tubes up to 100mL at low speed.

## SCI636 Multi-Purpose Low-speed Centrifuge

### Features

- Speed can be set from 300- 6000rpm
- Maximum capacity of the centrifuge: 100 mLx4
- 9 Acceleration/10 Brake speed settings to ensure optimal separation
- A wide range of accessories(fixed angle and swing-out bucket rotors)
- Automatic rotor identification
- Timers can be set up to 99 min. for short run/ continuous run
- 9 procedures stored in memory makes the operation much simplified
- Maintenance-free brushless DC motors



### Specifications

Speed range
Max. RCF
Speed accuracy
Max. Capacity
Run Time
Motor
Display
Program Memory
Safety Devices
Acceleration/Deceleration time
Power
Dimension[WxDxH]
Weight
Certification
Advanced features


SCI636
300-6000rpm increment: 10rpm
4300xg
±20rpm
100mLx4
30sec-99mins/continuous
Brushless DC
LCD
9
Door Imbalance protection Over speed & Over temperature detection
9 ↑ / 10 ↓
660W; Single-phase AC220V-240V, 50Hz/60Hz, 6.3A; AC110V-120V, 50Hz/60Hz, 10A
445x579x269mm
36kg
CE cTUVus FCC IVD
speed/rcf switch; Rotor identification

# SCI636 | Rotors and Adapters



## Uncapping block

for S4-100 rotor


















## SE4-100(Standard accessory) for DM0636 & DM0636R

Cat. No. 19400041

Max. speed: 4000rpm

Max. RCF: 2910xg

Rotor material: stainless steel body and adapter

											
	19400045		19400044			19400043		19400042			
bucket	x 4										
tube	x 36		x 16			x 8	x 4	x 4	x 4	x 8	x 20
Nominal volume	3-7mL		10mL	12mL	15mL	50mL	100mL	85mL	50mL	15mL	3-7mL
φ×L mm	13×75	13×100	16×100	17×105	17×120	29.5×100	38×108	38×104	29.5×100	17×120 13×100 13×75	13×100 13×75
tube											
adapter	with plug										
							A100P80	A100P50	A100P15	A100P10	
Package	36						4	4	8	4	
Tubes per rotor	36	36	16	16	16	8	4	4	4	8	20
Radius(cm)	14	16.5	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.1	14.7
Max RCF (g-force)	2500	2950	2840	2840	2840	2840	2840	2840	2840	2700	2630

## Available rotors



**Cat. No.** 19400062

### S2-MP

SCI636

Max. speed: 4000rpm  
Max. RCF: 2200×g  
Rotor capacity: Micro-plates 384-PCR; 96-PCR  
Rotor material: stainless steel body and aluminum buckets



**Cat. No.** 19400036

### AS12-PCR8

SCI636

Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: PCR 8 trips×12  
Rotor material: aluminum  
Bio-safe(Biosealing): Yes



**Cat. No.** 19400034

### AS30-2

SCI636

Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 2mL×30  
Rotor material: aluminum  
Bio-safe(Biosealing): Yes



**Cat. No.** 19400037

### AS60-2

SCI636

Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 2mL×60  
Rotor material: aluminum  
Bio-safe(Biosealing): Yes

## Available rotors



### AS6-50V

**Cat. No.** 19400038

SCI636

Max. speed: 6000rpm  
 Max. RCF: 4020×g  
 Rotor capacity: 50mL×6  
 Rotor material: aluminum  
 Bio-safe(Biosealing): Yes



### AS18-5V

**Cat. No.** 19400035

SCI636

Max. speed: 6000rpm  
 Max. RCF: 4020×g  
 Rotor capacity: 5mL×18  
 Rotor material: stainless steel body and aluminum buckets



### A8-50

**Cat. No.** 19400039

SCI636

Max. speed: 5000rpm  
 Max. RCF: 3960×g  
 Rotor capacity: 50mL×8 or 15mL×16  
 Rotor material: aluminum body and stainless steel adapter



### A30-15

**Cat. No.** 19400040

SCI636

Max. speed: 4500rpm  
 Max. RCF: 3210×g  
 Rotor capacity: 15mL×30  
 Rotor material: aluminum body and stainless steel adapter Bio-safe(Biosealing): Yes

Capacity	3-7mL Blood collection tube	10mL Blood collection tube	12mL urine tube	15mL
φ×L mm	13×100	16×100	17×105	17×120
Tubes Quantity	30	30	30	30

# Spectrophotometers

Scilogex spectrophotometers are an indispensable instrument routinely used in colleges, universities and research institutes for quantitative analysis in fields including biotechnology and quality control of new material developed. V-Series provides high resolution, high performance and excellent stability.




## Features

- **User Friendly Operation and Information Rich LCD Display:** The large 128 x 64 dots, backlit LCD screen with adjustable brightness control displays a large array of data also in graphical format.
- **On-Board Data Storage:** The System can save the test results, up to 200 groups of data and 200 standard curves in the RAM memory.
- Data can be restored after a sudden power failure.
- **Auto setting wavelength:** To set wavelength automatically to calibrate the system through arrow keys to avoid operation errors.
- **Automatic Switching:** Tungsten & Deuterium lamps switching is automatic. Selectable from a wavelength range of 190 to 1100nm.
- **PC control through application software:** The spectrophotometer is fully equipped and capable of executing all functions in stand-alone mode. The optional application software 'Wave Professional' provides computer control for the spectrophotometer (through the built-in USB port), apart from other functions such as spectrum scan, Time scan (kinetics), multiwavelength scanning & Nucleic Acid / Protein measurement. (SP-V1100/SP-UV1100)
- **Large sample compartment:** To accommodate 5–100mm path length cuvettes with optional holders. A variety of optional accessories are available.


### Basic Mode

546.0nm		0.001A
No.	WL.	Abs.
1	230.0	0.001
2	340.0	0.000
3	450.0	0.002
4	540.0	0.000
5	620.0	0.003

### Quantitative

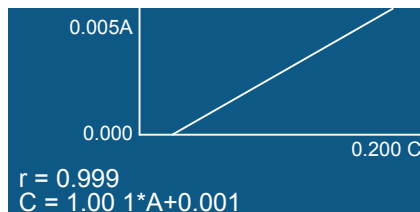

### Kinetics

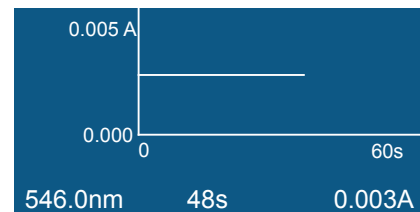



Model	SCI-V1000	SCI-UV1000	SCI-V1100	SCI-UV1100
Optical System	Single Beam	Single Beam	Single Beam	Single Beam
Light Source	Tungsten lamp	Tungsten lamp & Deuterium lamp	Tungsten lamp	Tungsten lamp & Deuterium lamp
Spectral Bandwidth	4.0nm	4.0nm	2.0nm	2.0nm
Wavelength Range	325-1000nm	200-1000nm	320-1100nm	190-1100nm
Wavelength Accuracy	±2nm	±2nm	±0.5nm	±0.5nm
Wavelength Repeatability	≤1nm	≤1nm	≤0.3nm	≤0.3nm
Photometric Range	-0.3 - 3.0 A, 0 - 200%T	-0.3 - 3.0 A, 0 - 200 %T	-0.3 - 3.0 A, 0 - 200 %T	-0.3 - 3.0 A, 0 - 200%T
Photometric Accuracy	±0.003 A @ 0.5 A, ±0.006 A @ 1.0 A, ±0.5%T @ 100%T	±0.003 A @ 0.5 A, ±0.006 A @ 1.0 A, ±0.5%T @ 100%T	±0.002 A @ 0.5 A, ±0.004 A @ 1.0 A, ±0.3%T @ 100%T	±0.002 A @ 0.5 A, ±0.004 A @ 1.0 A, ±0.3%T @ 100%T
Photometric Repeatability	≤0.0015 A @ 0.5 A, ≤0.003 A @ 1.0 A, ≤0.25%T @ 100%T	≤0.0015 A @ 0.5 A, ≤0.003 A @ 1.0 A, ≤0.25%T @ 100%T	≤0.001 A @ 0.5 A, ≤0.002 A @ 1.0 A, ≤0.15%T @ 100%T	≤0.001 A @ 0.5 A, ≤0.002 A @ 1.0 A, ≤0.15%T @ 100%T
Stability	≤0.002 A/h @ 500 nm (after preheat 2 hours)	≤0.002 A/h @ 500 nm (after preheat 2 hours)	≤0.002 A/h @ 500 nm (after preheat 2 hours)	≤0.002 A/h @ 500 nm (after preheat 2 hours)
Stray Light	≤0.2%T @ 360nm	≤0.2%T @ 220&360nm	≤0.05%T @ 360nm	≤0.05%T @ 220 & 360nm
Sample Compartment	4-position, 10mm pathlength cuvette	4-position, 10mm pathlength cuvette	4-position, 10mm pathlength cuvette	4-position, 10mm pathlength cuvette
Display	LCD	LCD	LCD	LCD
Output	USB Port & Parallel Port (Printer)	USB Port & Parallel Port (Printer)	USB Port & Parallel Port (Printer)	USB Port & Parallel Port (Printer)
Power	110/220VAC, 50/60Hz, 80W	110/220VAC, 50/60Hz, 120W	110/220VAC, 50/60Hz, 80W	110/220VAC, 50/60Hz, 120W
Dimension(LxWxH)	490x360x210mm	490x360x210mm	490x360x210mm	490x360x210mm
Weight	10kg	12kg	10kg	12kg



# Spectrophotometer | Accessories



**Cat. No.** 18900337  
Micro Cell holder



**Cat. No.** 18900340  
8-position auto cell changer  
(for SCI-V1100&SP-UV1100)



**Cat. No.** 18900331  
4-cell holder for 10mm sq. cuvette



**Cat. No.** 18900332  
4-cell holder for 10mm to 50mm sq. cuvette



**Cat. No.** 18900333  
4-cell holder for up to 100mm sq. cuvette



**Cat. No.** 18900338  
Test tube holder(ø8-ø22mm)



**Cat. No.** 18900334  
cylindrical cell holder(ø16mm)



**Cat. No.** 18900339  
solid sample holder  
(ø1.5-3mmø 1 position)



**Cat. No.** 18900335  
10mm water-jacketed  
(for SCI-V1100 & SCI-UV1100)



**Cat. No.** 18900336  
10mm water-jacketed 4-cell holder  
(for SCI-V1100 & SCI-UV1100)



Square cuvettes glass/quartz  
1-5mm/10-100mm



**Cat. No.** 18900341  
12V20W halogen lamp



**Cat. No.** 18900342  
Milas deuterium lamp, 10V, 300mA, 30W  
(for SCI-UV1000 & SCI-UV1100)

# FASTgel

## Gel Imaging System


The FASTgel gel imaging system can be used for qualitative analysis of nucleic acid and protein in purification and /or separation application, or colony counting application.

### Functions & Applications


FASTgel facilitates fast access to acquire high-quality images of electrophoresis gel or transfer membrane for analysis using a smartphone or tablet. With epi-blue instead of ultraviolet light source, FASTgel is able to safely and efficiently visualize stained DNA signals after gel electrophoresis.

In addition, Coomassie blue stained SDS-PAGE and colony dishes can be observed with the light plate mounted on the FASTgel.

Optionally you can control the complete imaging system via an app on your smartphone or tablet.




ECO Safe staining



Coomassie blue stained SDS-PAGE




colony dish image

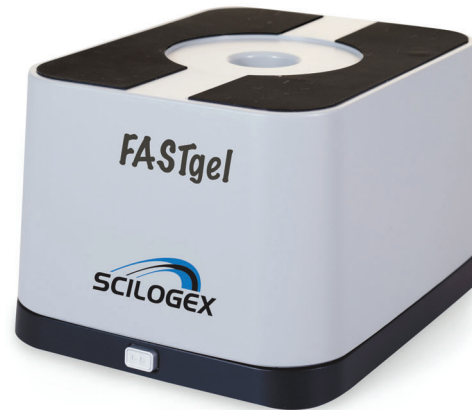


### Features

- Compact foot print with a field of 10×10cm
- Simple operation of experiments and quick acquisition of results
- Epi-blue light diminishes UV exposure to lab personnel and DNA damage in the sample
- Adjustable epi-blue light source emits light with high intensity and minimum heat for better light control
- Filter holders can accommodate most popular smartphones/tablets
- Optional light-weight app

### Simple assembly

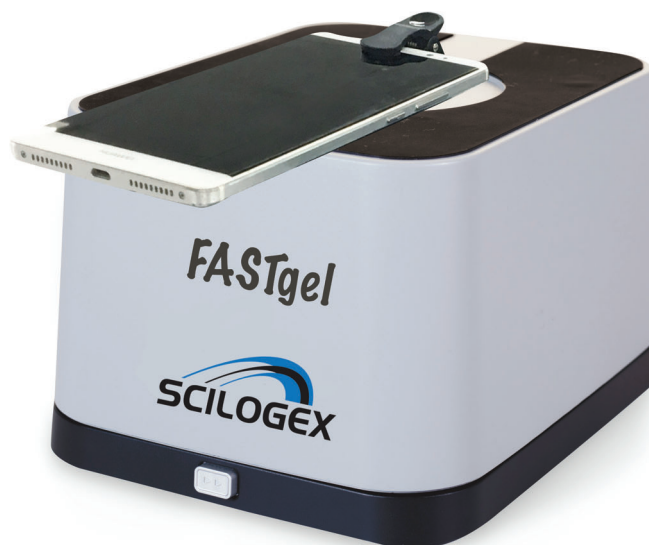

## Applications:



Light source cover



Light source



Smartphone



App

Observe and cut gels safe and sound with the amber filter shield



## Specifications

	FASTgel
Light Source	470nm epi blue light
White Light Plate	Yes
Filter Protective Shield	Amber, using when observing or cutting gels
Viewing Area	10 x 10cm
Compatible Dye	DNA: ECO Safe, SYBR Safe, GelGreen Protein: Lightning Red, Silver/ Coomassie blue, SYPRO Ruby
Light Source (L x W x H)	216 x 168 x 54 mm
Light Source Cover (L x W x H)	211 x 161 x 108 mm
Total Size (L x W x H)	216 x 168 x 128 mm
Weight	1.2 Kg
Power Supply	12V / 1.5A AC power adapter
Optional app	for Android 4.4 and above or iOS9.0 and above

# SCIOLOGEX

## DEWAR FLASKS



Standard sizes, capacities & refills	DEWAR			SPARE GLASS REFILL			
	Cat No.	Dia. mm	Height mm	Ref. No.	Internal Dia. mm	Internal Depth mm	Capacity Litres
Stainless Steel Cased Dewar, with Clamp Lid Attachment, Vent and Handle.	SS111	116 x 228		470 111	85 x 185		1
	SS222	142 x 268		470 222	106 x 205		2
	SS333	182 x 350		470 333	150 x 280		4.5
Shallow Style Stainless Steel Cased Dewars, no handle/lid	SS77SH	105 x 75		47077SH	77 x 50		0.17
	SS100SH	130 x 90		470100SH	100 x 65		0.38
	SS115SH	150 x 95		470115SH	115 x 70		0.57
	SS138SH	160 x 115		470138SH	130 x 90		1
	SS150SH	186 x 138		470150SH	155 x 110		1.9
Blue Enamelled Cased Dewars with Handle and Lid	MS111	116 x 228		470 111	85 x 185		1
	MS222	142 x 268		470 222	106 x 205		2
	MS 333	182 x 350		470 333	150 x 280		4.5
	MS 200	245 x 445		470 200	200 x 375		10

Our dewar flasks feature double-walled borosilicate glass, vacuum pumped and silvered insuring efficient storage, transport and use of liquid nitrogen and dry-ice. Dewar flasks with lids have a vented lid to safely expel evaporating gas. Stainless steel dewars with lids feature lid-clamps to secure the lid for safe transportation and minimizing spillage of contents.



Stainless Steel Cased Dewars



Blue Enamelled Cased Dewars

# PORTABLE DRY-ICE MAKER



The '**SCIOGEX**' Portable Dry-Ice maker is the fastest way of providing a block of Dry-Ice to your lab. It is compact and lightweight, requires no electric power and is safe and simple to use. Most importantly, it is always there in the lab to give you immediate access to Dry-Ice WHEN YOU NEED IT. The economy of having your Dry-Ice 'on tap' can provide considerable financial savings over a relatively short period as the cost of having Dry-Ice delivered to your lab can be prohibitive.

The '**SCIOGEX**' Portable Dry-Ice maker produces a block of approx.2.2Lbs in weight in approximately 1 minute, and all you have to do is connect the unit to a cylinder of CO<sub>2</sub>, and turn on the tap. Remember, it has to be a LIQUID cylinder with an internal siphon.

The unit comes with easy to follow operating instructions. Briefly, this is how it works.

1. Connect unit to Liquid CO<sub>2</sub> cylinder and turn on.
2. Monitor flow of liquid by means of pressure gauge provided.
3. When block is made, turn off gas on cylinder; unclip lid and sides of unit.
4. Remove block. GLOVES MUST BE WORN.
5. Replace sides and lid of unit to instantly make another block if required.

300002 SCIOGEX DILVAC Dry-Ice Maker, c/w Pressure Hose and Pressure Gauge, USA version

300001 SCIOGEX DILVAC Dry-Ice Maker, c/w Pressure Hose and Pressure Gauge, International version

