

The Finger Alert Professional 170-180° consists of:

- wide strip with click strip for the inside of the door
- narrow strip with click strip for the hinge side of the door

All strips are provided with tape and pre-drilled holes (for screws).

Maximum opening angle of a door°

This depends on:

- 1) maximum thickness of doors: 7 cm / 2.8"
- 2) maximum opening 20 cm / 9" between door and door frame
- 3) hinges which protrude beyond the door like cantilever hinges

Should one of the above mentioned points apply, the angle of opening will be less. In this case, the angle of opening can effectively be limited by the use of door-closers or door-stops.


Fast and easy installation

arte viva. child safety
kindergartens and schools
Keulenaar 6b
3961 NM Wijk bij Duurstede
The Netherlands
T +31 (0)343 57 69 54
E info@arteviva.nl
I www.arteviva.nl

	RAL 9016 white	RAL 7016 anthracite
length		
180 cm/71"	✓	✓
195 cm/77"	✓	✓
229 cm/90"	✓	✓
245 cm/97"	✓	✓




Wood

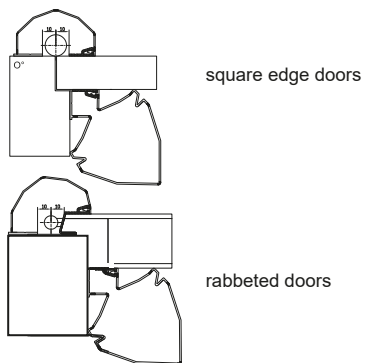


side of the door	FA 170 -180 Professional
inside	wide strip with click strip
hinge side	narrow strip with click strip
maximum opening	175°

PVC / Aluminium




side of the door	FA 170 -180 Professional
inside	wide strip with click strip
maximum opening	180°

Steel

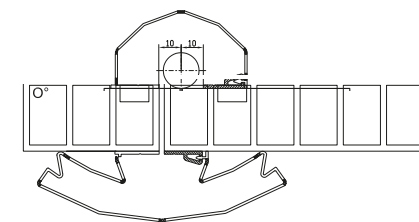


side of the door	FA 170 -180 Professional
inside	wide strip with click strip
hinge side	narrow strip with click strip
maximum opening	175°

Swing doors

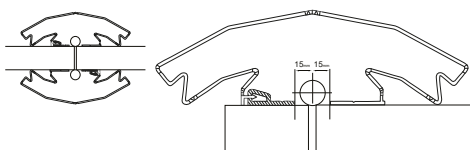


side of the door	FA 170 -180 Professional
both sides	wide strip with click strip
maximum opening	90°

Pivot doors



side of the door	FA 170 -180 Professional
both sides	wide strip with click strip
maximum opening	90°

Extreme wide strip



side of the door	FA 180 Professional EXTREME
inside	extreme wide strip with clickstrip
maximum opening	>180°