


## UL DESIGN NO. U420

FIRE RATING: 2 Hour  
STC: N/A  
SYSTEM THICKNESS: 6 3/4"

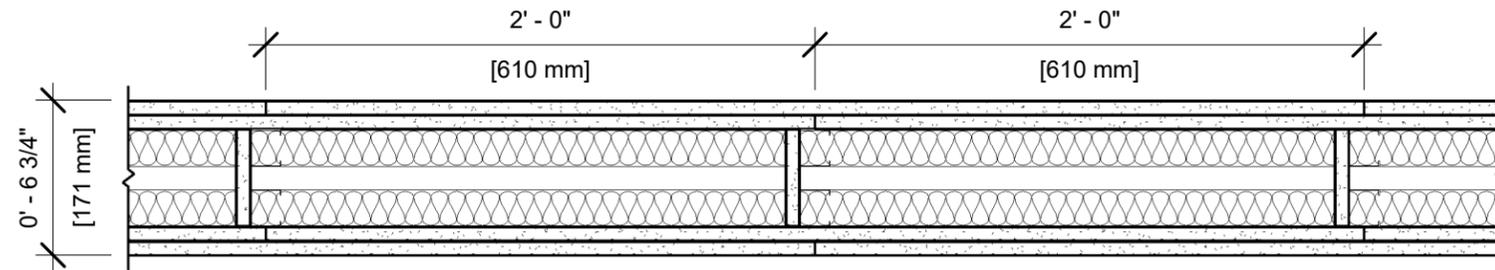

### ASSEMBLY OPTIONS:

**GYPSUM BOARD:** 2 LAYERS 5/8" THICK GYPSUM BOARD (UL TYPE SCX™)

**STEEL STUDS:** 1-5/8" STEEL STUDS, 25 GA. MSG., SPACED 24" O.C.

**INSULATION:** 1-1/2" KNAUF EcoBatt® INSULATION, OPTIONAL


**BRACING:** PER UL DESIGN

**AIR SPACE:** 1" AIR SPACE

**STEEL STUDS:** 1-5/8" STEEL STUDS, 25 GA. MSG., SPACED 24" O.C.

**INSULATION:** 1-1/2" KNAUF EcoBatt® INSULATION OPTIONAL

**GYPSUM BOARD:** 2 LAYERS 5/8" THICK GYPSUM BOARD (UL TYPE SCX™)

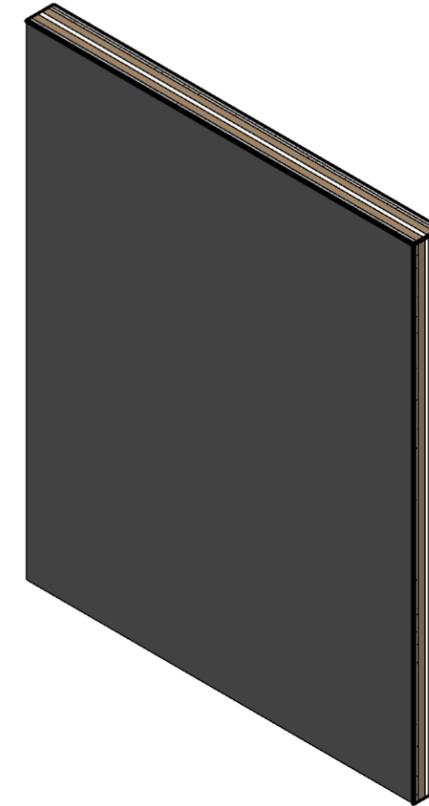

### NOTES:

STUD AND INSULATION SIZES ARE MINIMUM UNLESS OTHERWISE STATED IN DESIGN.

FOR THE MOST UP-TO-DATE INFORMATION OR ASSEMBLY OPTIONS, REFER TO THE UL FIRE RESISTANCE DIRECTORY.

REFER TO THE UL FIRE RESISTANCE DIRECTORY FOR INFORMATION REGARDING PRODUCT ORIENTATION AND FASTENING REQUIREMENTS.