


UL DESIGN NO. U420

FIRE RATING: 2 Hour
STC: N/A
SYSTEM THICKNESS: 6 3/4"

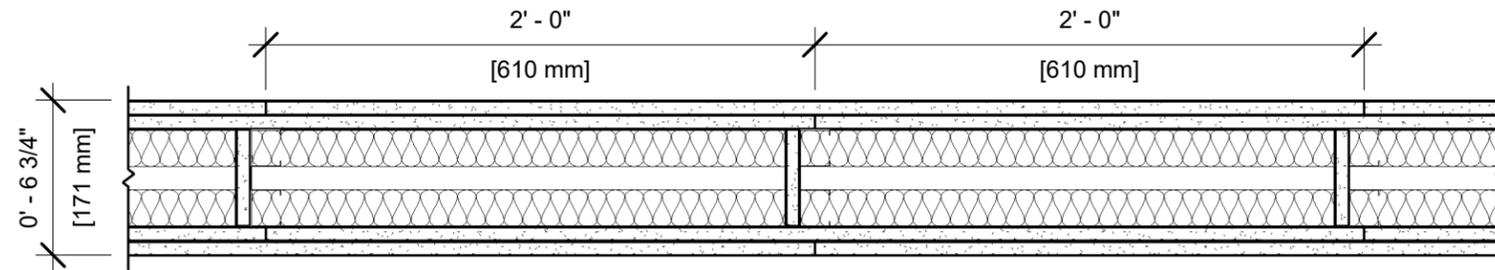

ASSEMBLY OPTIONS:

GYPSUM BOARD: 2 LAYERS 5/8" THICK GYPSUM BOARD (UL TYPE ULIX™)

STEEL STUDS: 1-5/8" STEEL STUDS, 25 GA. MSG., SPACED 24" O.C.

INSULATION: 1-1/2" KNAUF EcoBatt® INSULATION, FRICTION-FITTED TO FILL STUD CAVITY


BRACING: PER UL DESIGN

AIR SPACE: 1" AIR SPACE

STEEL STUDS: 1-5/8" STEEL STUDS, 25 GA. MSG., SPACED 24" O.C.

INSULATION: 1-1/2" KNAUF EcoBatt® INSULATION, FRICTION-FITTED TO FILL STUD CAVITY

GYPSUM BOARD: 2 LAYERS 5/8" THICK GYPSUM BOARD (UL TYPE ULIX™)

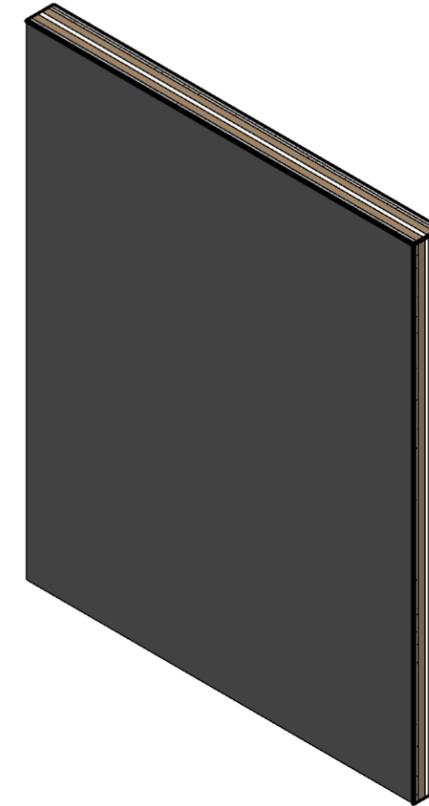

NOTES:

STUD AND INSULATION SIZES ARE MINIMUM UNLESS OTHERWISE STATED IN DESIGN.

FOR THE MOST UP-TO-DATE INFORMATION OR ASSEMBLY OPTIONS, REFER TO THE UL FIRE RESISTANCE DIRECTORY.

UL TYPE ULIX™ REQUIRES THE USE OF INSULATION FOR SINGLE-LAYER, STEEL-FRAMED UL FIRE-RATED ASSEMBLIES.

REFER TO THE UL FIRE RESISTANCE DIRECTORY FOR INFORMATION REGARDING PRODUCT ORIENTATION AND FASTENING REQUIREMENTS.