



UL DESIGN NO. U408 (EXTERIOR WALL)

FIRE RATING: 2 HOUR
 STC: N/A
 SYSTEM THICKNESS: 6"

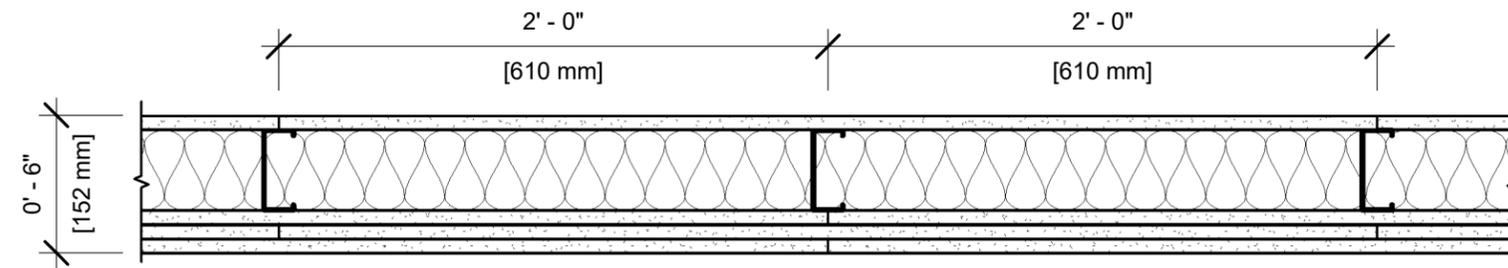

ASSEMBLY OPTIONS:

- GYPSUM BOARD:** ONE LAYER 5/8" THICK GYPSUM BOARD (UL TYPE USGX™)
- STEEL STUDS:** 3-1/2" STEEL STUDS, 20 GA. MSG., SPACED 24" MAX. O.C. WITH OPTIONAL KNAUF EcoBatt® INSULATION
- GYPSUM BOARD:** THREE LAYERS 5/8" THICK GYPSUM BOARD (UL TYPE ULIX™)

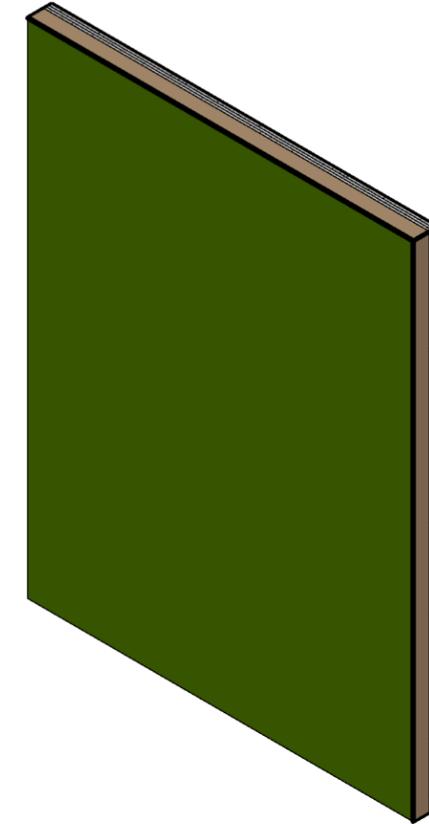

NOTES:

STUD AND INSULATION SIZES ARE MINIMUM UNLESS OTHERWISE STATED IN DESIGN.

FOR THE MOST UP-TO-DATE INFORMATION OR ASSEMBLY OPTIONS, REFER TO THE UL FIRE RESISTANCE DIRECTORY.

UL TYPE ULIX™ REQUIRES THE USE OF INSULATION FOR SINGLE-LAYER, STEEL-FRAMED UL FIRE-RATED ASSEMBLIES.

REFER TO THE UL FIRE RESISTANCE DIRECTORY FOR INFORMATION REGARDING PRODUCT ORIENTATION AND FASTENING REQUIREMENTS.