



UL DESIGN NO. U415 A

FIRE RATING: 1 Hour
STC: 45
SYSTEM THICKNESS: 3 1/8"

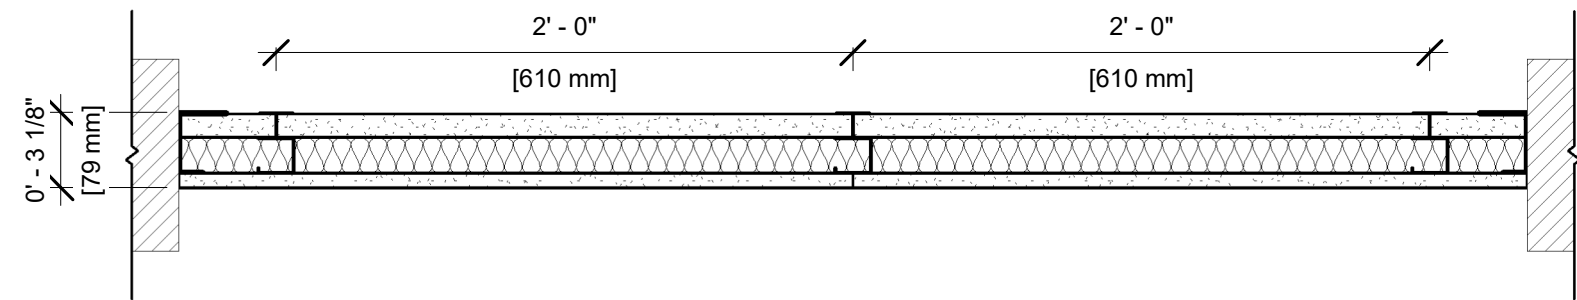

ASSEMBLY OPTIONS:

- GYPSUM BOARD: ONE LAYER 1" THICK GYPSUM LINER PANEL (UL TYPE SLX™)
- STEEL STUDS: 2-1/2" CH STUDS, 20 GA. MSG., SPACED 24" O.C.
- INSULATION: 1-1/2" KNAUF EcoBatt® INSULATION
- GYPSUM BOARD: ONE LAYER 5/8" THICK GYPSUM BOARD (UL TYPE SCX™)

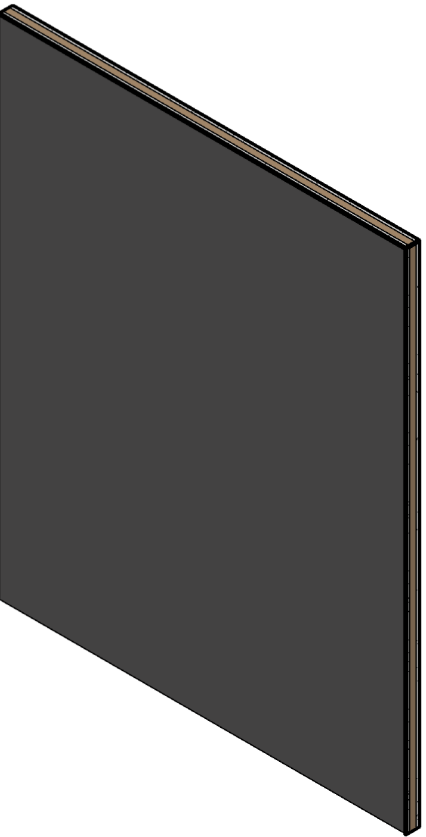

NOTES:

STUD AND INSULATION SIZES ARE MINIMUM UNLESS OTHERWISE STATED IN DESIGN.

FOR THE MOST UP-TO-DATE INFORMATION OR ASSEMBLY OPTIONS, REFER TO THE UL FIRE RESISTANCE DIRECTORY.

REFER TO THE UL FIRE RESISTANCE DIRECTORY FOR INFORMATION REGARDING PRODUCT ORIENTATION AND FASTENING REQUIREMENTS.