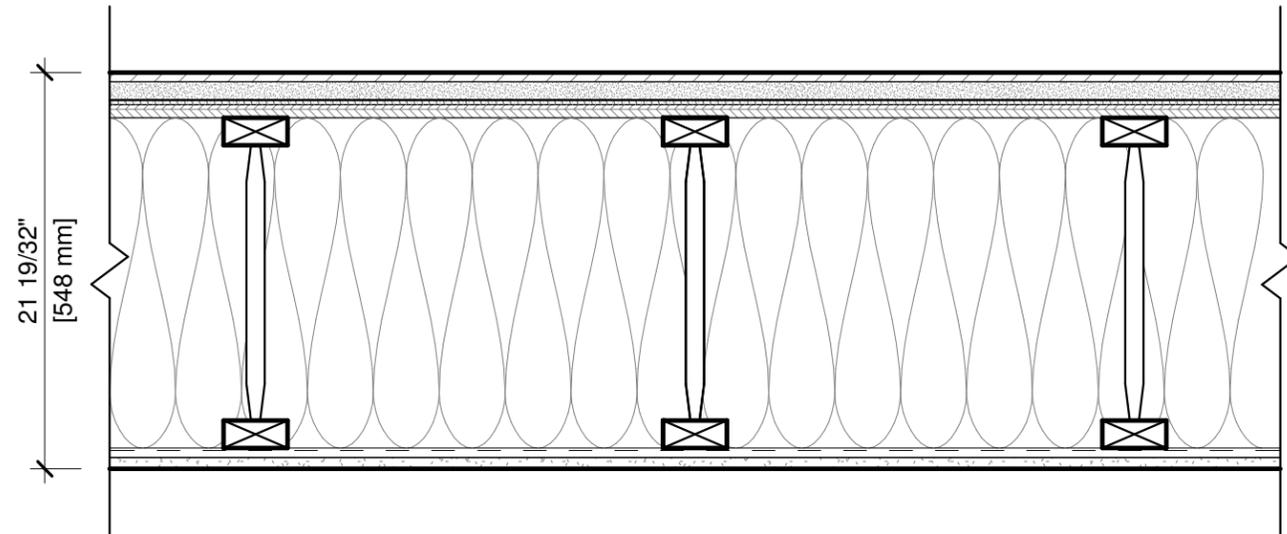


DESIGN NO.

UL L521, UL L550, UL L563


FIRE RATING
 CONSTRUCTION TYPE
 SOUND TRANSMISSION CLASS (STC)
 IMPACT INSULATION CLASS (IIC)
 SOUND TEST
 SYSTEM THICKNESS (INCHES)
 SYSTEM THICKNESS (MM)

1 HOUR
 WOOD TRUSS
 61
 57
 G9878.04
 21.59 IN.
 548 MM

**ASSEMBLY REQUIREMENTS:**

FINISH FLOORING: 1/2" [12.7 MM] ENGINEERED HARDWOOD (BY OTHERS)
 SUBFLOOR TOPPING MIXTURE: ONE LAYER 1" [25.4 MM] USG LEVELROCK® BRAND 2500 SERIES FLOOR UNDERLAYMENTS
 SOUND ATTENUATION MAT: ONE LAYER 1/4" [6.35 MM] USG LEVELROCK® SAM-N25™ SOUND ATTENUATION MAT
 SUBFLOOR: 23/32" [18.2 MM] WOOD STRUCTURAL PANEL
 STRUCTURE: 18" [457 MM] PARALLEL CHORD OPEN WEB WOOD TRUSSES, AT 24" [610 MM] O.C.
 INSULATION: 18" [457 MM] KNAUF ECOFILL® WX BLOWING INSULATION
 RESILIENT CHANNEL: 1/2" [12.7 MM] RESILIENT CHANNEL, 25 GA. (0.018"), SPACED 16" [406 MM] O.C. MAX.
 GYPSUM PANELS: ONE LAYER 5/8" [15.8 MM] GYPSUM PANEL (UL TYPE ULIX™)

Revit System Family
 (Copy & Paste into your Revit project)

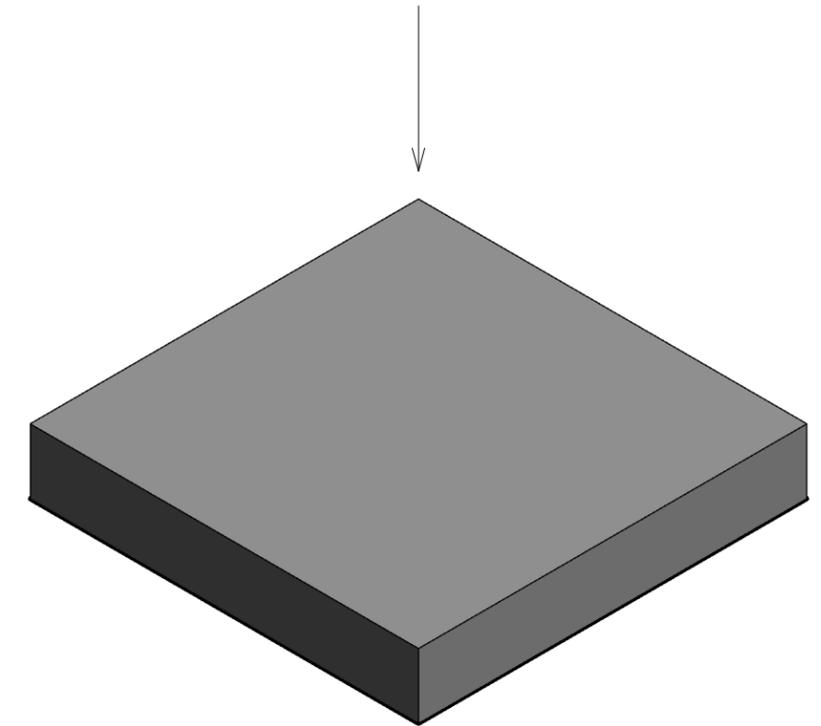**GENERAL FLOOR CEILING NOTES:**

- FOR THE MOST UP-TO-DATE DETAILS, INCLUDING CONSTRUCTION VARIATIONS, REFER TO THE PUBLISHED ASSEMBLY IN THE UL PRODUCT IQ™ DATABASE OR GA DESIGN MANUAL.
- FRAMING SIZES AND INSULATION THICKNESS ARE MINIMUM UNLESS OTHERWISE STATED IN THE PUBLISHED ASSEMBLY.
- FRAMING AND FASTENER SPACINGS ARE MAXIMUM UNLESS OTHERWISE STATED IN THE PUBLISHED ASSEMBLY.
- PANEL ORIENTATION SHALL BE AS SPECIFIED IN THE PUBLISHED ASSEMBLY.
- REFER TO APPLICABLE CODES REQUIREMENTS TO ENSURE COMPLIANCE PRIOR TO CONSTRUCTION.
- WHERE ACOUSTICAL PERFORMANCE IS PROVIDED IN AN ESTIMATED RANGE, THE VALUES ARE BASED ON LABORATORY TEST DATA OF SIMILARLY CONSTRUCTED ASSEMBLIES.
- WHERE DESIGN NO. INDICATES "PER", THE FIRE RATING IS BASED ON LABORATORY TEST DATA OF THE REFERENCED SIMILARLY CONSTRUCTED ASSEMBLIES.

ISSUE RECORD:

03/11/2022
 Revision Date

SHEET INFORMATION:

K-FC-WJ-1-29