



## Performance+®

### Elevated Temperature Batt and HD Blanket with ECOSE® Technology

Product-Data-Sheet

#### Description

Performance+® Elevated Temperature Batt 1000° and HD Blanket 1000° are semi-rigid thermal insulation products made from highly resilient inorganic glass fibers bonded with ECOSE® Technology.

#### Application

- High-temperature marine applications, industrial furnaces, boilers, vessels and industrial ovens.
- Applications where lighter-weight insulation or flexible/semi-rigid high-temperature insulations are needed for curved and irregular surfaces.

#### Specification Compliance

##### U.S.

- ASTM C553, Type I, II, V, VI
  - ASTM C1139; Type I, Grade 3; Type 2, Grade 3 (withdrawn 2019)
  - Conformity for Marine Equipment IMO 1408
  - USCG 164.109/18/1
  - UL/ULC Classified (UL 723)
- ASTM C795, MIL-I-24244, NRC Reg. Guide 1.36 (Certification needs to be specified at time of order)

##### Canada

- CAN/ULC S102

#### Indoor Air Quality

- **Asthma & Allergy Friendly®** Certified
- Verified Healthier Air™
- UL Environment
  - GREENGUARD Certified
  - GREENGUARD Gold Certified
  - Validated to be Formaldehyde-Free
- Does not contain polybrominated diphenyl ethers (PBDE) such as: Penta-BDE, Octa-BDE or Deca-BDE
- EUCEB Certified

#### Certifications



The Asthma & Allergy Friendly® Certification Mark is a Registered Certification Mark of the Asthma Allergy Foundation of America (AAFA) and Allergy Standards Ltd (ASL). Verified Healthier Air™ is a trademark of Airmid Healthgroup. USGBC® and the related logo are trademarks owned by the U.S. Green Building Council® and are used with permission.

Contractor: \_\_\_\_\_

Job: \_\_\_\_\_

Date: \_\_\_\_\_

## Technical Data

Property (Unit)	Test	Performance
Corrosiveness	ASTM C665	Does not accelerate corrosion of steel
Corrosion	ASTM C1617	Pass
Water Vapor Sorption (by weight)	ASTM C1104	5% or less
Maximum Service Temperature	ASTM C411	1000° F (538° C)
Mold Growth	ASTM C1338	Pass
Surface Burning Characteristics (flame spread/smoke developed)	ASTM E84, NFPA 90A and 90B, UL 723, CAN/ULC S102	UL/ULC Classified FHC 25/50

## ET Batt 1000° Custom Forms Available


Density	Thickness	Width	Length
1.6 PCF (25.6 kg/m <sup>3</sup> )	1½" (38 mm)	24" (610 mm)	48" (1,219 mm)
	2" (51 mm)		
	2½" (64 mm)		
	3" (76 mm)		
	3½" (89 mm)		
	4" (102 mm)		

## HD Blanket 1000° Custom Forms Available

Density	Thickness	Width	Length
1.6 PCF (25.6 kg/m <sup>3</sup> )	1½" (38 mm)	48" (1,219 mm)	120' (36.6 m)
	2" (51 mm)		80' (24.4 m)
	2½" (64 mm)		70' (21.3 m)
	3" (76 mm)		60' (18.3 m)
	3½" (89 mm)		50' (15.2 m)
	4" (102 mm)		40' (12.2 m)

## Thermal Conductivity | ASTM C177

Mean Temperature	k	k(SI)
100° F (38° C)	0.24	0.035
200° F (93° C)	0.33	0.048
300° F (149° C)	0.44	0.063
400° F (204° C)	0.57	0.082
500° F (260° C)	0.72	0.104

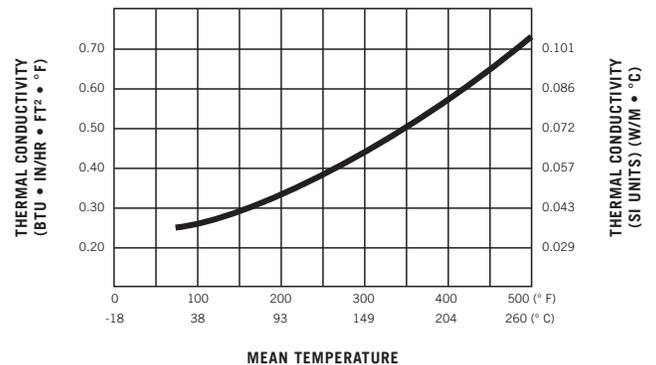

## APPLICATION & SPECIFICATION GUIDELINES

### Precautions

- During initial heat-up to operating temperatures above 350° F (177° C), a slight odor and some smoke may be given off as a portion of the bonding material used in the insulation begins to undergo a controlled decomposition.
- If natural convection is not adequate in confined areas, forced ventilation should be provided in order to protect against any harmful fumes and vapors that might be generated.

### Storage

- Protect material from water damage or other abuse. Protect from welding sparks and open flame. The material may be stored outside if the packaging is not damaged.

### Preparation

- Apply the product on clean, dry surfaces.

### Application

- There is no heat-up cycle required.
- The product should be secured with welded pins or studs and covered with sheet metal. An alternate method entails covering the insulation with a metal mesh and insulating cement, canvassing and painting.
- Pins and studs shall be located a maximum of 4" (102 mm) from each edge and spaced no greater than 16" (406 mm) on center.
- Care should be taken to avoid over compressing the insulation with the retaining washer.
- For application of this product over 500° F (260° C), double layer application is recommended with staggered joints.
- When using the products at 1000° F (538° C), it is recommended that no more than 6" (152 mm) thickness should be used. For thicknesses in excess of 6", contact your Knauf Insulation Territory Manager.

Check with your Knauf Territory Manager to ensure information is current.

The chemical and physical properties of this product represent average values determined in accordance with accepted test methods. The data is subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

Consult with or follow local building and energy codes to determine appropriate R-values and need for and placement of a vapor retarder.

### **Knauf Insulation, Inc.**

One Knauf Drive  
Shelbyville, IN 46176

### **Technical Support**

Phone: (317) 398-4434 Option 6

[info.us@knaufinsulation.com](mailto:info.us@knaufinsulation.com)

[www.knaufnorthamerica.com](http://www.knaufnorthamerica.com)

## FIBERGLASS AND MOLD

Fiberglass insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated.

Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced.

This product is covered by one or more U.S. and/or other patents.

See patent [www.knaufnorthamerica.com/patents](http://www.knaufnorthamerica.com/patents)

© 2025 Knauf Insulation, Inc.

The trademarks KNAUF, PERFORMANCE+, ECOSE, the design elements and colors, and related marks are trademarks of Knauf Insulation, Inc. or its affiliates.