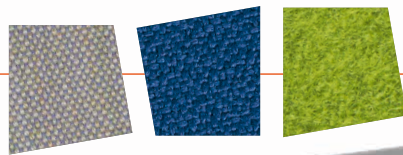# ACTIVE.T
KEEPS EMPLOYEES ACTIVE.

Now also with integrated extended collision protection

FABRIC-COVERED FLY-BY SCREEN
height-adjustable through 140 mm in various fabric groups.

UP-DOWN CONTROL
for rapid height adjustment using just two buttons **between 640 and 1300 mm.**

FRAME
available in white, aluminium and black.

CABLE CHAIN
for vertical wire management.

DESK TOP
in 25 mm MFC, bolted to the frame side pieces.

SURFACE FINISHES
Top in solid colour and patterned melamine

KÖNIG + NEURATH

ACTIVE.T INFOCARD

	Single desk	Double bench
Electrical height adjustment	640 - 1300 mm	640 - 1300 mm
25 mm top	Widths 1200 - 2000 mm Depths 700 - 1000	Widths 1200 - 1800 mm Depths 1480 - 1880 mm
Cut-outs in the desk top (option)	1 - 3 cut-outs	–
Clip-down cable tray, opens both sides	Height 100mm	Central cable tray
Side trims	left, right, both sides	left, right, both sides
Modesty panel	☐	☐
Screens with fabric cover	Height 430 mm, height above desk 450 mm	Height 800 mm, height above desk 510 mm
Fly-by screen with fabric cover	Height 805 mm, height above desk 450 mm	–
Accessories		
Vertical cable management	Cable chain, 40-segment	Cable chain, 30 and 40-segment
Cable clamps	☐	☐
CPU holder	☐	☐
Wire management		
Sockets	☐	☐

■ Standard ☐ Optional

Prepared as standard:
Support for optimal use of the desk functions (alternating between standing and sitting).

SMART Connector simply connect and install the "LIVE.STAND" programme once on the desktop. (Microsoft Windows 10 is recommended as the operating system)

SMART Connector

1 | SIDE TRIMS FOR SINGLE DESK
Steel side trims with 10 mm levelling adjustment and in the matching desk depth can be fitted to either or both sides.
Cable outlet is not provided.

2 | SIDE TRIMS FOR BENCH SYSTEM
Steel side trims with 10 mm levelling adjustment and in the matching desk depth can be fitted to either or both sides.
Cable outlet is not provided.
Dimensions (h x w): 537 mm x 85 mm

3 | DESK-TOP SCREEN
Fabric-covered desk-top screens are clamped to the rear of the desk top.

4 | FLY-BY SCREENS
Fly-by screens are height-adjustable through 140 mm.

5 | BENCH SYSTEM
In the following widths: 1200, 1400, 1600 and 1800 mm. Depths are 1480, 1680 and 1880 mm. The basic adjustment is via a simple up/down control.

6 | TOP
25 mm MFC top, bolted to the frame side pieces. Adaptor cut-outs to allow cable access can be specified as an option.