

# QUIET.BOX Live

## CLOSENESS AT A DISTANCE: OUR ROOM-IN-ROOM SOLUTION

### FAN BOX

Various colours, including RAL shades, to choose from

### CEILING SAIL

with concealed ventilation

**VOICE LEVEL REDUCTION**  
Classification B according to ISO 23351-1

### DOOR HINGES

3D-adjustable in silver, optional in white or black

**AMBIENTE LIGHT**  
can be incorporated for good front lighting

### CEILING-MOUNTED LIGHTS


6-spot ceiling canopy for homogeneous background lighting supplied by Artemide.

### PROFILES

Various colours, including RAL shades, to choose from

### OPAQUE PANELS

can be chosen from the K+N plastic/melamine finishes (solid colour and wood effect)

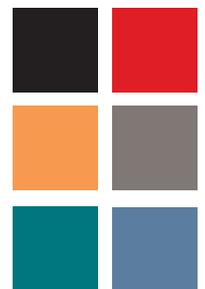

### FABRIC INNER SURFACES

for optimum internal acoustics choose from the K+N fabric collection (Economy 71, Comfort 92, Standard 901, 902 and 201)



### ELECTRICS

Three variants are available, see back.

### CONSOLE UNIT

optionally available with or without shelf. Colour choices in melamine wood effect from K+N collection, including ceiling and monitor panels.

### DOOR ACOUSTIC GLAZING

Hinges and position optionally left or right (optional DIN right/DIN left)  
Sound insulation value  $R_{w,P}$  38 dB




# QUIET.BOX Live INFOCARD



Size	1,200 x 1,500 x 2,226 mm
Required room height	2,400 mm
Ceiling	Acoustic ceiling with concealed air outlets and integrated ceiling spotlights.
Wall configuration	2 variants
Absorption (echo)	Yes
Voice level reduction	Classification B according to ISO 23351-1
Door	Hinged door (DIN right, DIN left)
Ventilation	Controllable, active ventilation
Climate control	No
Lighting	Basic lighting via ceiling spotlights, optionally with ambient and video lighting
Installation time (excl. transport)	under one day
Reconfiguration on the same footprint	approx. 1/2 day
Construction	Low-noise
Flexibility	All components can be reused
Fastened to the floor of the building	No
Electrics	In 3 variants
Sound insulation	Solid walls up to $R_{w,P}$ 43 dB, glazed sections $R_{w,P}$ 38 dB

**Possible combinations with the QUIET.BOX Duo and QUIET.BOX Duo XL configured as a block.**

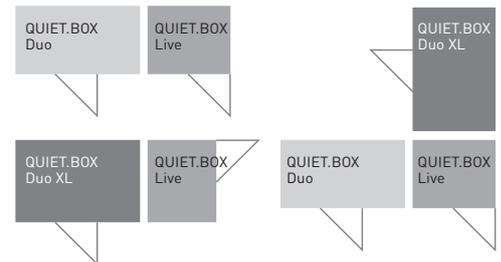

## 1 | CONSOLE UNIT

Cockpit feature to store hardware on one side without obstructing the view of the screen.

## 2 | CABLE PASS-THROUGH

to help organise tangled cables.

## 3 | ELECTRONIC CONTROLS

Motion detector and TFT control.

## 4 | ELECTRICS

In three variants.  
 Conference: 2x mains power, 1x HDMI, 1x USB  
 Work: 1x mains power, 1x USB  
 Talk: 1x mains power

## 5 | BACKGROUND LIGHTING

Indirect lighting for shadow-free face illumination.

## 6 | FRONT LIGHTING

for perfect front lighting during video conferences.