

# QUIET.BOX Live

## CLOSENESS AT A DISTANCE: OUR ROOM-IN-ROOM SOLUTION

### FAN BOX

Various colours, including RAL shades, to choose from

### CEILING SAIL

with concealed ventilation

### DOOR HINGES

3D-adjustable in silver, optional in white or black

**AMBIENTE LIGHT**  
can be incorporated for good front lighting



### CEILING-MOUNTED LIGHTS

6-spot ceiling canopy for homogeneous background lighting supplied by Artemide.

**PROFILES**  
Various colours, including RAL shades, to choose from


### OPAQUE PANELS

can be chosen from the K+N plastic/melamine finishes (solid colour and wood effect)



### FABRIC INNER SURFACES

for optimum internal acoustics choose from the K+N fabric collection




**ELECTRICS**  
Three variants are available, see back.


**CONSOLE UNIT**  
optionally available with or without shelf. Colour choices in melamine wood effect from K+N collection, including ceiling and monitor panels.

### DOOR

Hinges and position optionally left or right (left- or right-hand according to DIN standard)

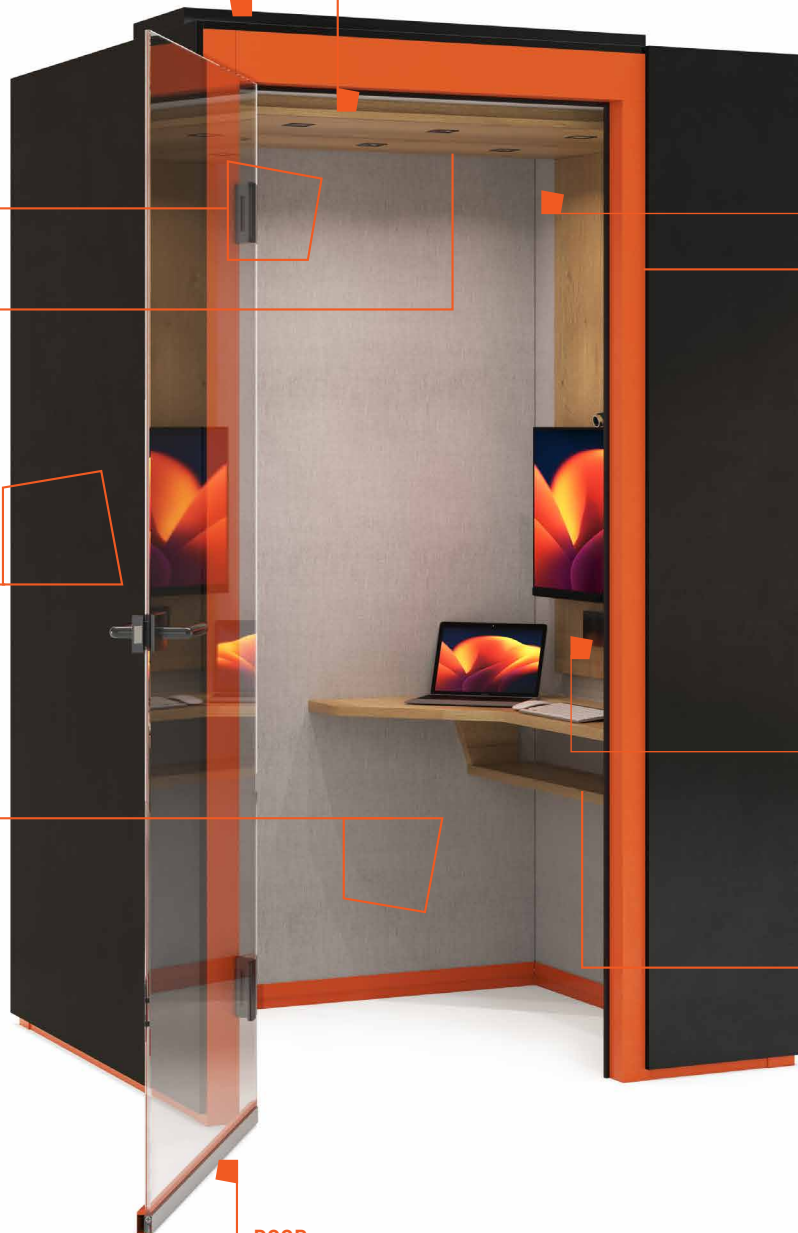


# QUIET.BOX Live INFOCARD

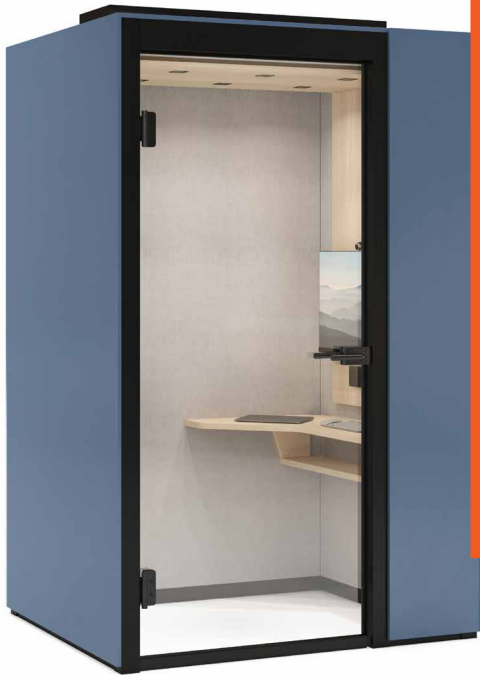

Size	1,200 x 1,500 x 2,226 mm
Required room height	2,400 mm
Ceiling	Acoustic ceiling with concealed air outlets and integrated ceiling spotlights.
Wall configuration	2 variants
Absorption (echo)	Yes
Sound insulation	Yes, 37– 43 dB
Door	Hinged door (DIN R, DIN L)
Ventilation	Controllable, active ventilation
Climate control	No
Lighting	Background lighting from ceiling spotlights, optionally with ambient and video illumination
Installation time (excl. transport)	under one day
Reconfiguration on the same footprint	approx. 1/2 day
Construction	Low-noise
Flexibility	Reposition as required
Fastened to the floor of the building	No
Electrics	In 3 variants
Sound insulation	Solid walls up to 43 dB, glazed sections 38 dB

**Possible combinations with the QUIET.BOX Duo and QUIET.BOX Duo XL configured as a block.**

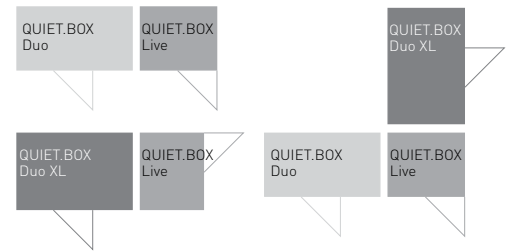

## 1 | CONSOLE UNIT

Cockpit feature to store hardware on one side without obstructing the view of the screen.

## 2 | CABLE PASS-THROUGH

to help organise tangled cables.

## 3 | ELECTRONIC CONTROLS

Motion detector and TFT control.

## 4 | ELECTRICS

In three variants.  
 Conference: 2x mains power, 1x HDMI, 1x USB)  
 Work: 1x mains power, 1x USB  
 Talk: 1x mains power

## 5 | BACKGROUND LIGHTING

Indirect lighting for shadow-free face illumination.

## 6 | FRONT LIGHTING

for perfect front lighting during video conferences.