

# QUIET.BOX Duo XL and QUIET.BOX Duo Organic XL

## PEACE AND QUIET - FOR TWO TO FOUR

**BUILT-IN LED**  
for uniform illumination

**DOOR HINGES**  
3D-adjustable in silver,  
optional in white or black

**REAR WALL**  
Melamine, fabric or glazed


**SOLID SURFACES**  
choose from the K+N  
collection MFC (solid colour  
and wood-effect)  
Acoustic insulation  
level  $R_w$  42 dB



**PROFILES**  
Available in a  
selection of  
colours, including  
RAL colours



**FABRIC INNER  
SURFACES**  
for optimum  
internal acoustics  
choose from the K+N  
fabric collection  
(Economy 71,  
Comfort 92,  
Standard 901,  
902 and 201)




**ACOUSTIC GLAZING**  
with acoustic insulation level  
 $R_w$  38 dB.  
Door  $R_w$  37 dB  
(optionally DIN L/R)


**CONTROL/ACCESSORIES**  
Customised equipment  
as required



# QUIET.BOX Duo and QUIET.BOX Duo Organic INFOCARD



**INTERNAL VARIANT 1**  
Stand-up working  
QUIET.BOX Duo bridging desk  
Premium wiring package  
Electrical equipment: Conference




**INTERNAL VARIANT 2**  
QUIET.BOX Duo standard stand-up table  
Basic II wiring package  
Electrical equipment: Work




**INTERNAL VARIANT 3**  
Seated meeting  
QUIET.BOX Duo standard desk  
QUIET.BOX Duo bench seat  
Basic I wiring package  
Electrical equipment: Talk

**QUIET.BOX Duo XL Organic**  
also available  
as a version with  
rounded corners

Size	2200 x 1500 x 2226 mm
Required room height	2400 mm
Ceiling	Acoustic ceiling in fabric
Wall configuration	2 variants
Absorption (echo)	Yes
Sound insulation	Yes, 37-43 dB
Door	Hinged door
Ventilation	Controllable, active ventilation
Climate control	No
Lighting	Ceiling mounted light
Glass modules	Large areas
Installation time (excl. transport)	3-4 hours
Reconfiguration on the same floor	approx. 1/2 day
Construction	Low-noise
Flexibility	Reposition as required
Fastened to the floor of the building	No
Wire management	Wired post, centred in the rear wall
Sound insulation	Solid walls up to 43 dB, glazed sections 38 dB



**1 | FABRIC CEILING**  
Acoustic properties

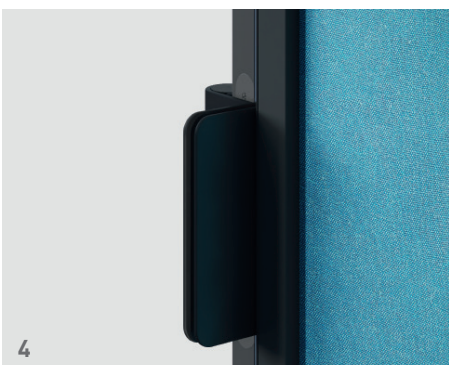

**2 | CEILING TRIM PROFILE**  
Neat covering for ceiling structure and concealed technology

**3 | OPERATING CONSOLE**  
Light and ventilation switches as standard version or available with touch function

**4 | DOOR HINGES**  
3D-adjustable in silver, optional in white or black

**5 | FLOOR CONNECTION**  
Flush-level entry