


INSIDE.10 LIGHT AND INDIVIDUAL SHIELDING

KEY FACTS

- + **Certified material**
Screen system made of 100 % polyester, OEKO-TEX® Standard 100, 100% recyclable
- + **Versatile in use**
As desk mounted, fly-by, side, central screen for benches or as an U- form, flexible use for TALO.YOU, ACTIVE.T, BASIC.4 und DO IT.4
- + **Design for every furnishing concept**
Frameless look in 3D round design or 90° corner design
- + **Acoustically effective**
As a screen or privacy screen for creative or concentrated work
- + **Invisible connection**
Adapter design not visible from the front
- + **Practical**
Lightweight and pinnable, 10 mm thick
- + **Flame retardant**



SYSTEM OVERVIEW

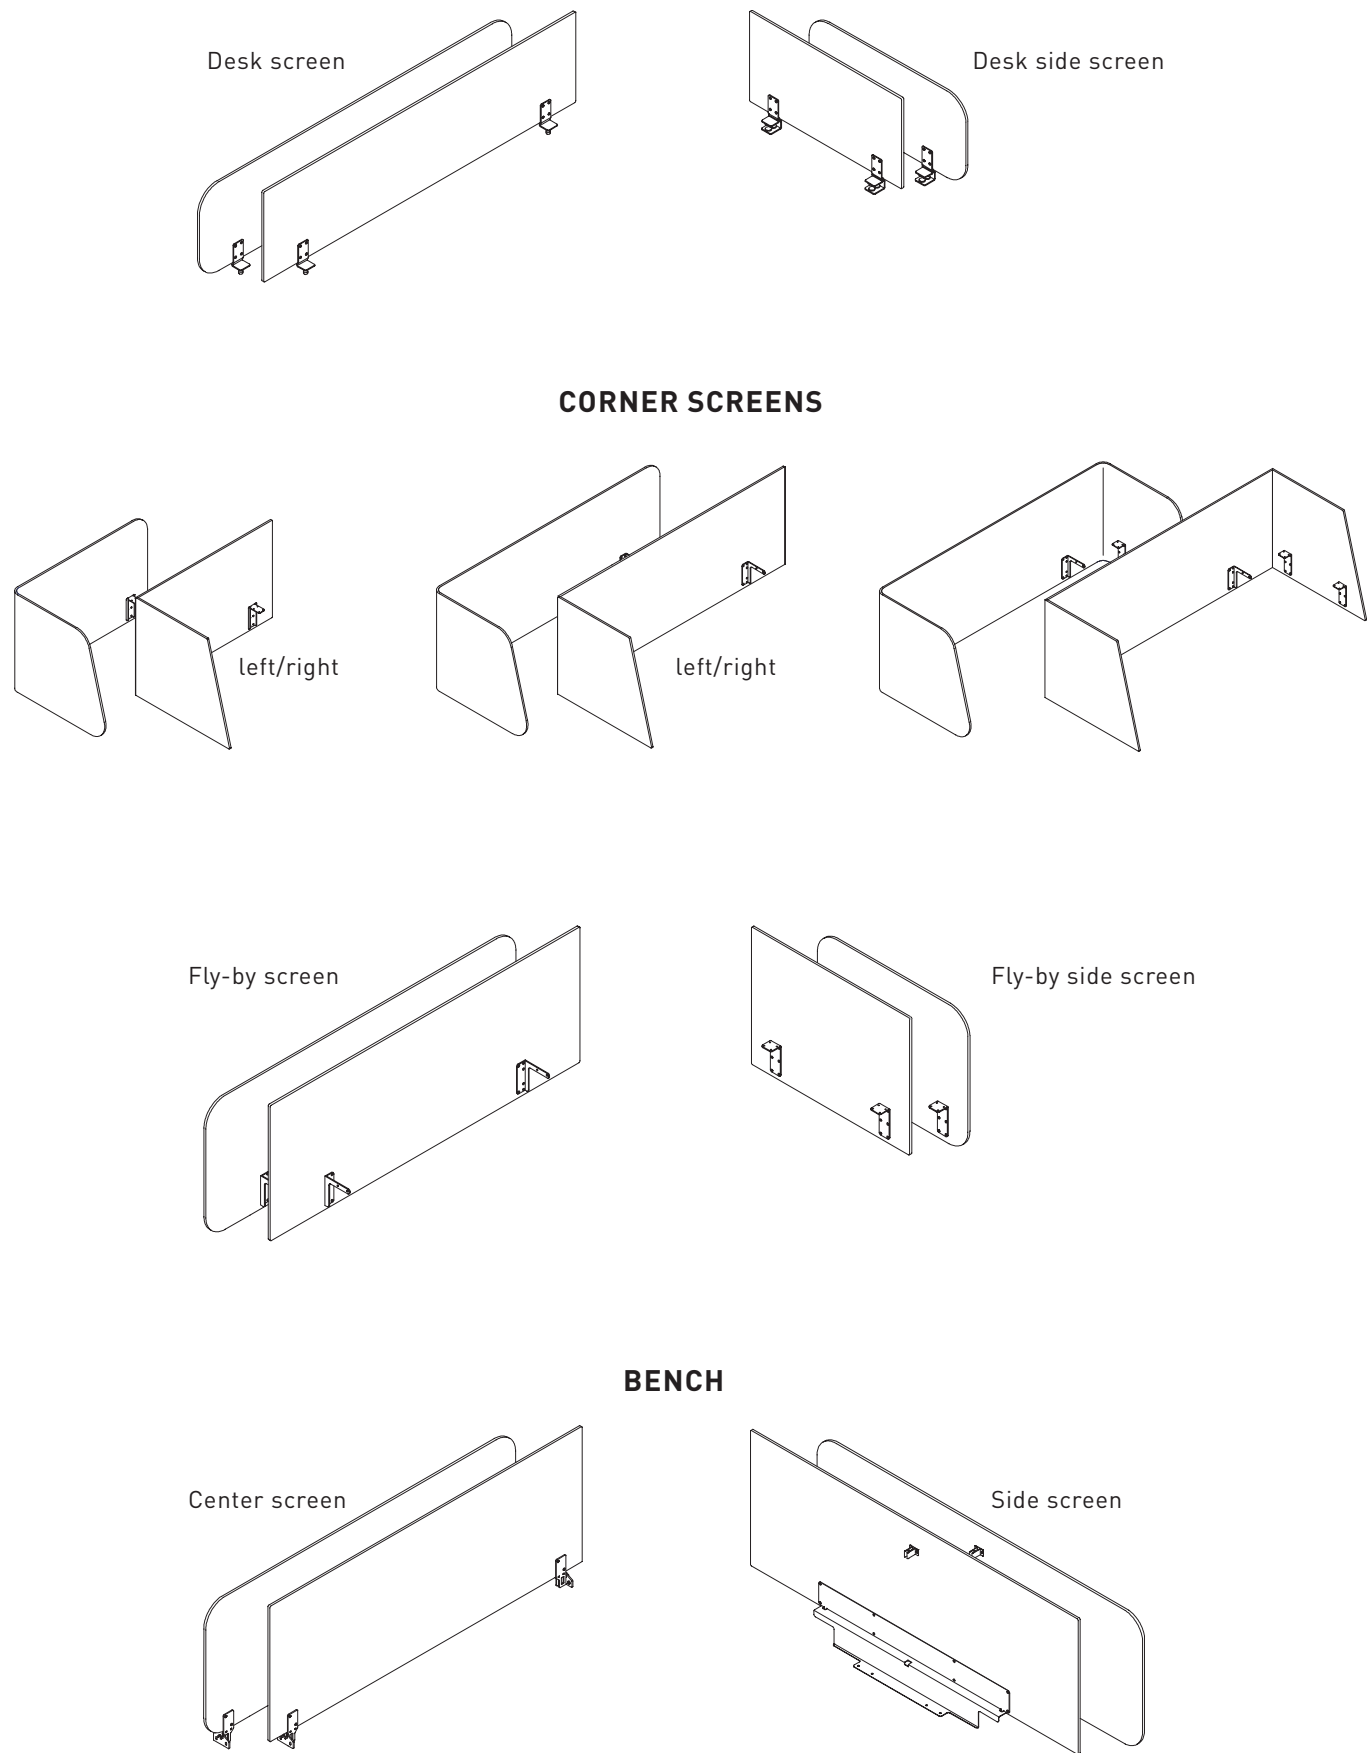

DETAILS

1 | CORNER SCREEN

For individual shielding for different table widths.



1

2 | SCREEN FOR BENCH

For team workstations central and side screens can be used in combination. A connector ensures stability.




2

PROPERTIES AND MATERIALS

- + lightweight and pinnable
- + acoustically effective
- + sustainable
- + 100% recyclable



3

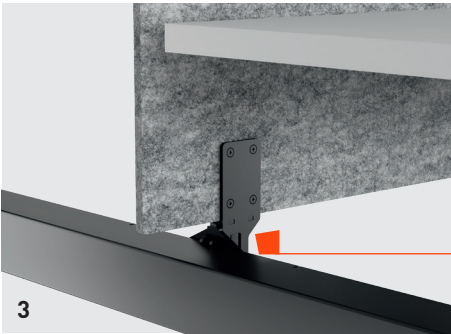

3


3 | DESK-MOUNTED ADAPTER

The design is created that no disturbing adapters are visible at the front.


BENCH: Central screens are screwed to the side frame.

4 | CORNER SCREENS

In round or corner design angled panels ensure a reduction in ambient noise.

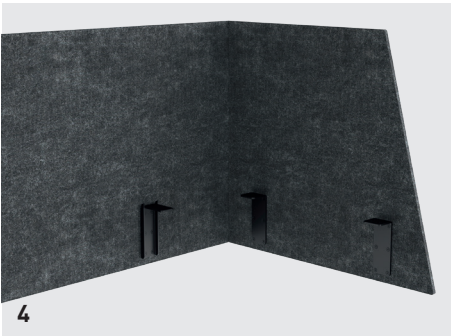


4

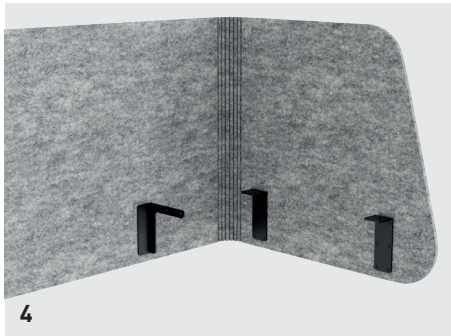


4

CURRENT COLOR SELECTION

anthracite




light grey




yellow




orange



green



turquoise



PRODUCT OVERVIEW



Desk-mounted
screen



Fly-by-
screen



Side screen



Bench
central screen



L-form screen



U-form screen

Construction principle

Frameless construction,
acoustically effective PET fleece



Material properties

Acoustic effectiveness



Pinnable



100 % recyclable



OEKO-TEX® Standard 100 certified



Flame retardant



Paneeldesign

Rounded corners
Radius 100 mm



90° corner design



Fitting options

Adapter bracket



Clamp adapter



Console fitting



Frame fitting



Use of sliding top



Bracket for screwing on



Screen connector

Connector (plastic) for central and
side screens



Dimensions

System thickness 10 mm



Height mm

400

600

400, 600

600

600

600

Widths mm

800, 1.000,
1.200, 1.400,
1.600, 1.800,
2.000

800, 1.000,
1.200, 1.400,
1.600, 1.800,
2.000

580, 680, 780,
880, 980, 1.480,
1.680, 1.880

1.400, 1.600,
1.800, 2.000

810, 910,
1.010, 1.210,
1.410, 1.610,
1.810, 2.010

820, 920,
1.020, 1.220,
1.420, 1.620

Colors PET fleece

Light grey



Anthracite



Yellow



Orange



Green



Turquoise



■ Base □ Option