

THINK.TANK.II

SPACES WHERE PEOPLE CAN BE CREATIVE

LIGHTING

Pendant or ceiling-mounted light available (see reverse)

CEILING

Acoustic properties



FLOOR TRACK

Low floor connection, not offset, barrier-free.



SCREEN THICKNESS

Flush-fitting surface on all elements (glass, wall, door)

CORNER POSTS




MODULE OVERVIEW

THINK.TANK.II

Wall module

- + Organiser accessories and monitor mounting available
- + Wire management system can be integrated in the modules
- + With reversible trims
- + Lots of design options (fabric, melamine, decor)
- + White- or blackboard

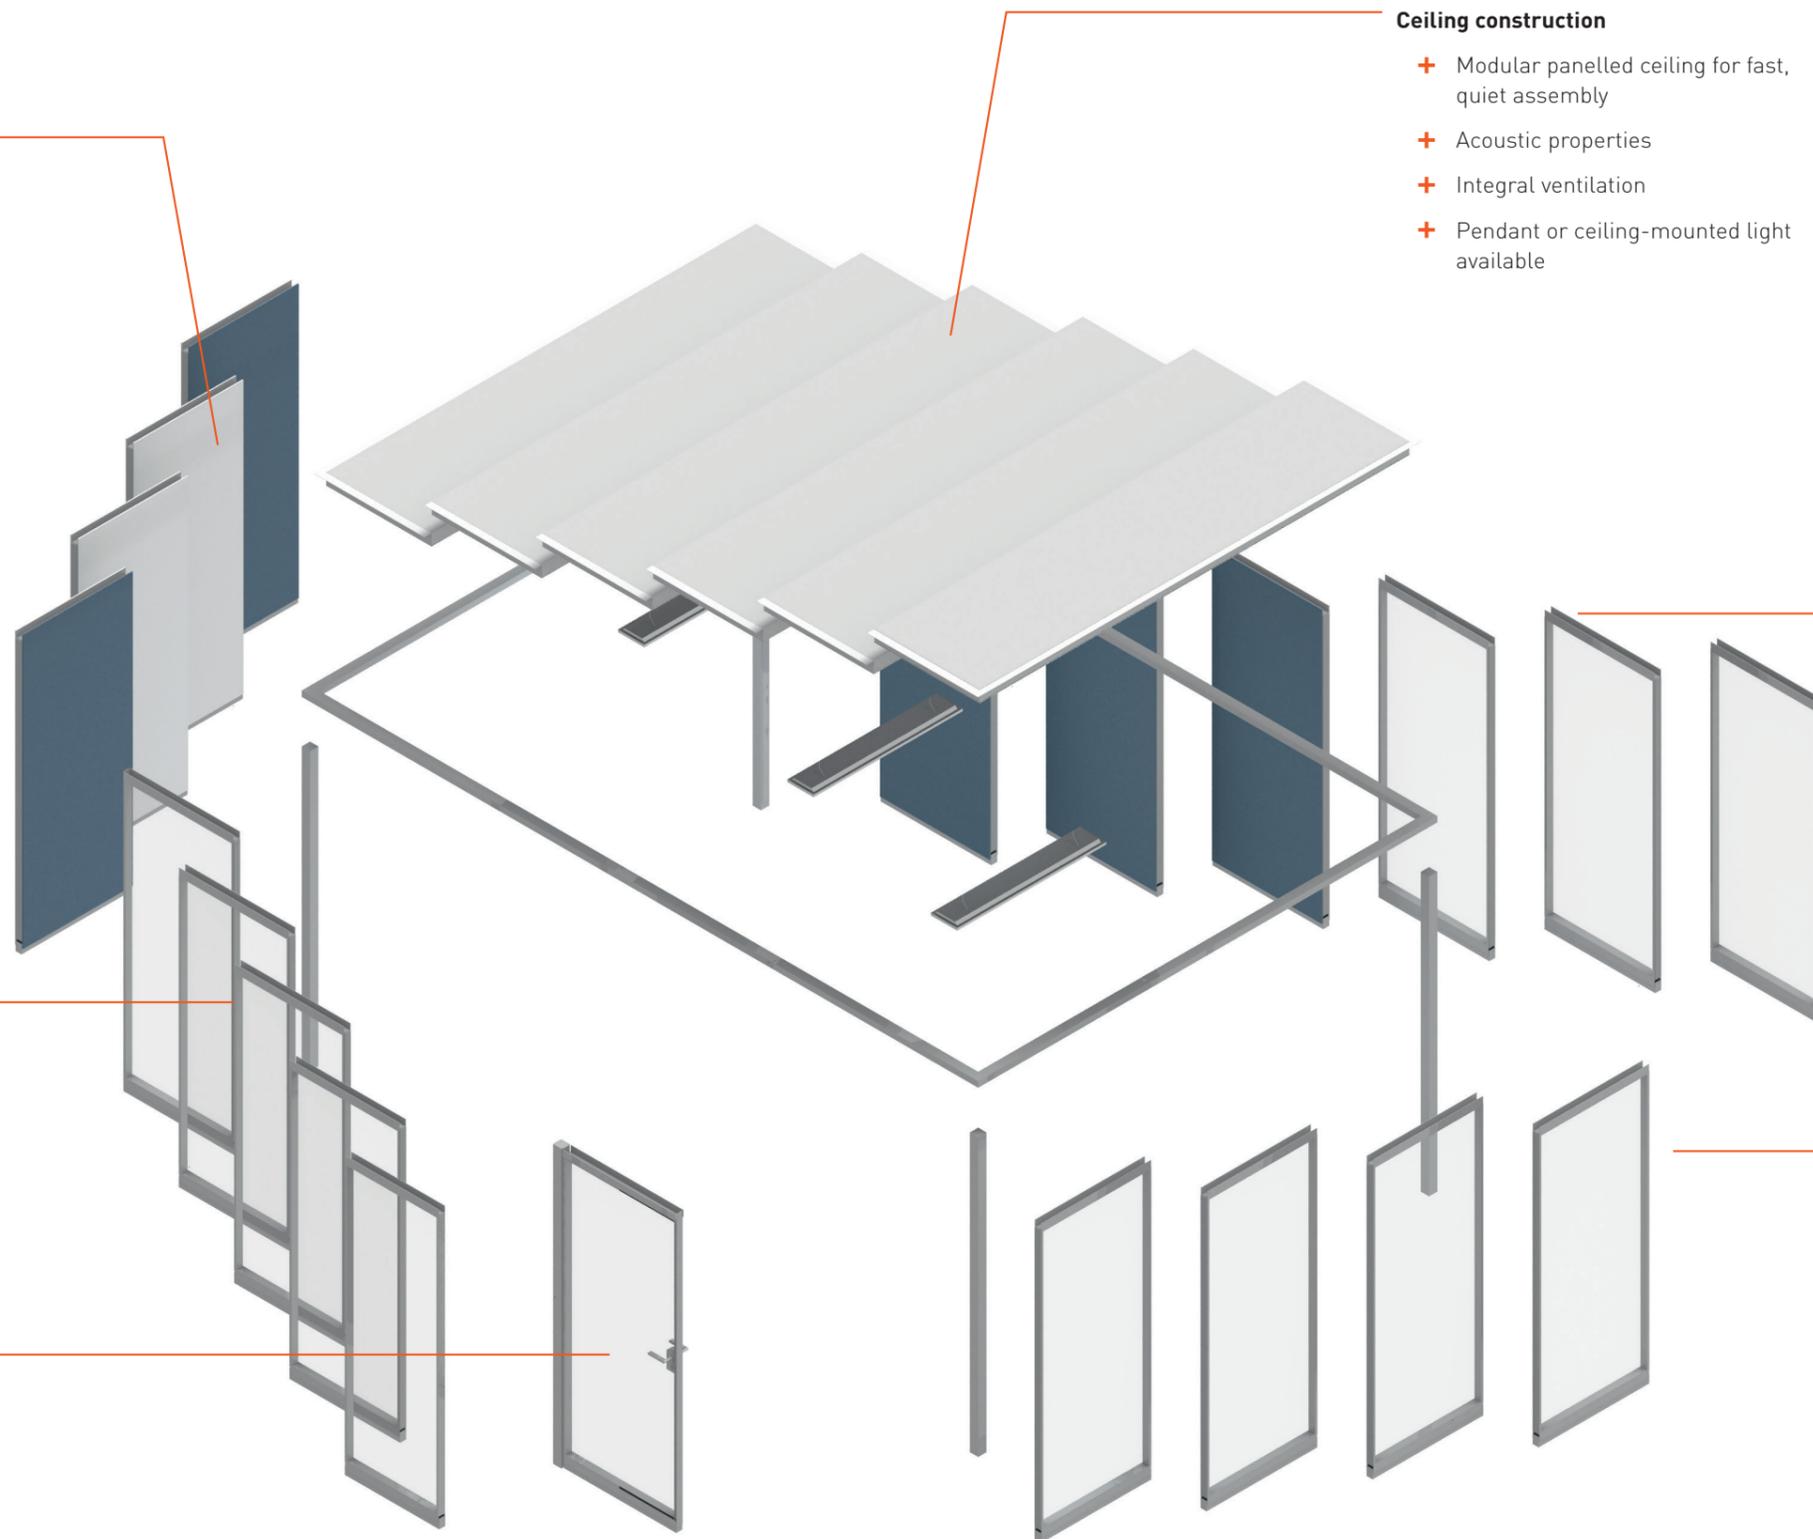

Ceiling construction

- + Modular panelled ceiling for fast, quiet assembly
- + Acoustic properties
- + Integral ventilation
- + Pendant or ceiling-mounted light available

Glass modules

- + Supplied as complete modules
- + No need to bolt to the floor
- + bonded glass surfaces (flush glazing)
- + Uniform thickness across all elements

Module system

- + Preassembled for fast installation, low noise and dust

Door element

- + Ready-assembled module
- + Same thickness as glass elements, solid modules not set back
- + Glass or opaque material

System

- + Natural or coloured anodised finish
- + Individual size choice thanks to variable module width
- + Can be fully reversed and reassembled

THINK.TANK.II INFOCARD



Sizes	Individual
Ceiling	Ceiling of stretched fabric
Wall configuration	Unrestricted design
Absorption (echo)	Yes
Sound insulation	Yes, Rw,P 36-45 dB
Door	Hinged door
Ventilation	Controllable, active ventilation
Climate control	Yes
Lighting	Ceiling-mounted and pendant lights available
Glass modules	Prefabricated glass modules
Installation time (excl. transport)	Approx. half a day
Reconfiguration on the same floor	Approx. half a day
Construction	Low-noise
Flexibility	All components can be reused
Fastened to the floor of the building	Only in the door area
Wire management	In the solid walls, posts or electrics modules
Sound insulation	Solid walls up to Rw,P 45 dB, glazed sections Rw,P 45 dB

1 | LIGHTING

Pendant or ceiling mounted light available

2 | FABRIC CEILING

Acoustic properties.

3 | CEILING TRIM PROFILE



Neat covering for ceiling structure and concealed technology.

4 | VENTILATION OUTLET

Concealed in the all-round shadow gap for optimum air exchange.

5 | OPERATING CONSOLE

Light and ventilation switches standard version or available with touch function.

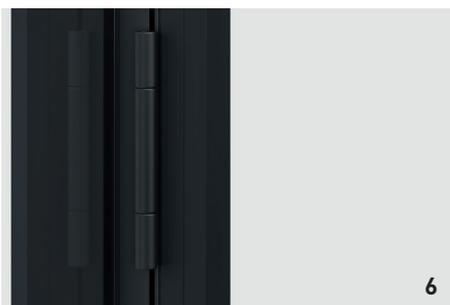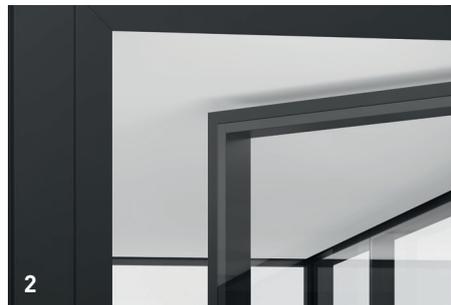

6 | DOOR HINGES

3D-adjustable

7 | UPPER DOOR CLOSER

Not visible when door is closed.