


ALUMINIUM ENCLOSED SAFETY SWITCHES 16-80A



- IP 66 (IP 67 available)
- Wide operating temperature range
- Good resistance against many chemicals
- Good UV resistance
- Excellent for hard weather conditions
- Padlockable
- Available with auxiliary contacts

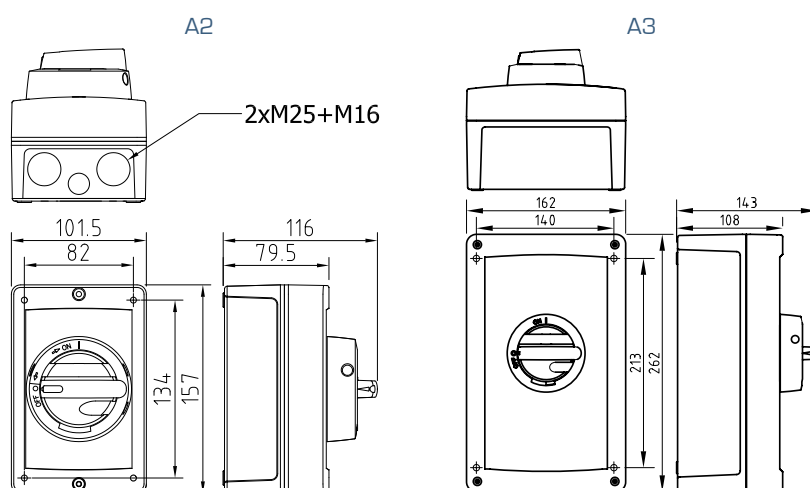

Type	AC-23 / 400V	AC-23 / 690 V	Poles	Enclosure	EAN code 6419410...	E-NO	Weight kg
KUA 316U	20 A / 7,5 kW	20 A / 15 kW	3P	A2	...310007	3600406	0.8
KUA 416U	20 A / 7,5 kW	20 A / 15 kW	4P	A2	...310106	3600850	0.9
KUA 616U	20 A / 7,5 kW	20 A / 15 kW	6P	A3	...310205	3600408	2.3
KUA 325U	25 A / 11 kW	25 A / 22 kW	3P	A2	...310403	3600416	0.8
KUA 425U	25 A / 11 kW	25 A / 22 kW	4P	A2	...310502	3600851	0.9
KUA 625U	25 A / 11 kW	25 A / 22 kW	6P	A3	...310601	3600421	2.3
KUA 332U	32 A / 15 kW	25 A / 22 kW	3P	A3	...310809	3600427	2.0
KUA 432U	32 A / 15 kW	25 A / 22 kW	4P	A3	...310908	3600852	2.1
KUA 632U	32 A / 15 kW	25 A / 22 kW	6P	A3	...311004	3600429	2.3
KUA 363U	63 A / 30 kW	40 A / 37 kW	3P	A3	...311202	3600426	2.0
KUA 463U	63 A / 30 kW	40 A / 37 kW	4P	A3	...311301	3600853	2.1
KUA 663U	63 A / 30 kW	40 A / 37 kW	6P	A3	...311400	3600425	2.3
KUA 380U1.V	80 A / 45 kW	63 A / 55 kW	3P	A3	...372784	3600897	2.3

Switch delivered with following cable glands:

Type	A	Cable glands	Cable size mm
KUA	16	M25	11-16
KUA	25	M25	11-16
KUA	32	M40	19-27
KUA	63	M40	19-27