SET LAUFEN PRO

Floorstanding WC Combi-Pack 825952, washdown, incl. cistern, with seat and cover slim with lowering system

86795.3.000.870.1






TECHNICAL DATA


Order no.	86795.3.000.870.1
Certified to	Floorstanding WC – EN 997, EN 33 Cistern – EN 14055
Specification	Floorstanding WC pan, washdown for 5/3-l-flush, 2 fixing holes, without laterale holes with cistern, flushing mechanism Dual-Flush 5/3-l (6/3-l-flush, 4,5/3-l-flush), water inlet side left, side right, 3/8” brass or rear, 1/2” brass, with water condensation insulation with seat and cover slim, Duroplast, removable, with hollow space fixation, with automatic lowering system
Outlet	horizontal VARIO, vertical 70 - 260 mm
Weight	42,0 kg
Mounting acc. incl.	Fixing set, order no. 89175.7 Fastening kit for cistern, order no. 89544.0
Mounting acc. excl.	Angle valve for water inlet Water inlet hose
Colours	White


SPECIFICATION TEXT

LAUFEN PRO Floorstanding WC Pack, washdown, with cistern, incl. seat and cover slim with lowering system
Floorstanding WC pan: sanitary ceramic, washdown, for cistern, EN 977, EN 33, 5/3-l-flush, dimension ceramic 360 x 650 x 440 mm, outlet horizontal, VARIO vertical 70 - 260 mm, back to wall, concealed fixation, 2 fixing holes
Special feature: concealed surfaces directing water are fully glazed throughout, vacuum checked
Cistern: sanitary ceramic, EN 14055, dimensions 375 x 160 x 395 mm Dual-Flush 5/3-l (6/3-l-flush, 4,5/3-l-flush), water inlet side left, side right, 3/8” brass or rear, 1/2” brass, with water condensation insulation
WC seat and cover slim: Duroplast, removable, with hollow space fixation, with automatic lowering system
Order no. 86795.3.000.870.1

TECHNICAL DRAWINGS / S 1 : 20



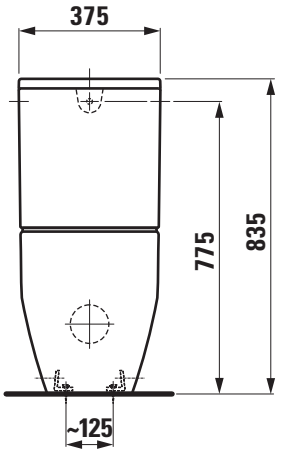

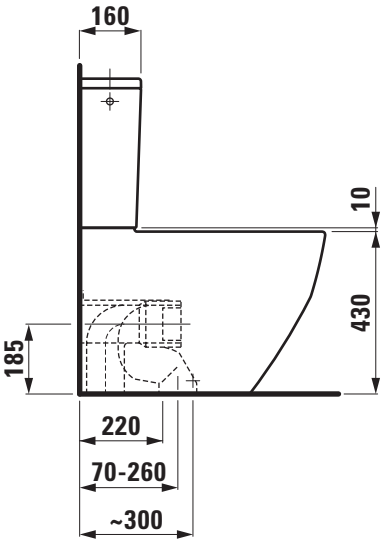

LAUFEN

Z 181227