DURASTAR™

12,000 BTU/H FLOOR MOUNTED IDU
SUBMITTAL COVER SHEET

PROJECT NAME _____
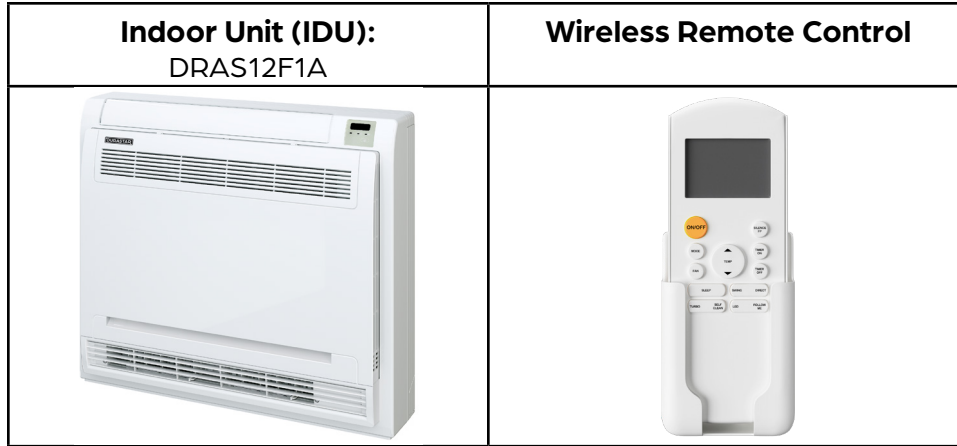
LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ **DATE** _____

Indoor Unit (IDU): DRAS12F1A	Wireless Remote Control

CAPACITIES

Cooling Capacity (BTU/hr)	Rated	12000
Heating Capacity (BTU/hr)	Rated	12000

ELECTRICAL DATA

Voltage/Phase/Frequency	208–230V, 1 Phase, 60 Hz

LINE SET REQUIREMENTS

Connection Type	Flare
Liquid	Ø1/4" (Ø6.35mm)
Gas	Ø1/2" (Ø12.7mm)
Drain Port O.D. / Drain Hose I.D.	Ø5/8" (Ø16mm)

INDOOR UNIT FAN DATA

Air Flow (CFM)	Low	201
	Medium	276
	High	321
Type	DC	
RLA	1.0	
Sound Pressure (dB(A))	Low	37
	Medium	46
	High	48

INDOOR UNIT DIMENSIONS

Unit Dimensions	Width	27 9/16"
	Depth	8 1/4"
	Height	23 5/8"
Carton Dimensions	Width	30 11/16"
	Depth	11 13/16"
	Height	27"
Net Weight	32.6 lbs.	
Gross Weight	41.0 lbs.	

PRODUCT FEATURES

- Wireless Remote Control with "Follow Me" Technology
- Auto Restart
- Auto Changeover
- 24–hour Timer
- Self Clean Function

AHRI CERTIFIED®
www.ahridirectory.org
Unitary Small HP
AHRI Standard 210/240
Certification applies only when the complete system is listed with AHRI.

ETL LISTED US
Intertek

DURASTAR™

27 9/16"

8 1/4"

23 5/8"

11 1/4"
(285mm)

6 13/16"
(173mm)

7 11/16"
(195mm)

3 11/16"
(94mm)

Mounting plate
(some units)

Mounting brackets
(some units)