

SUBMITTAL COVER SHEET

| SUBMITTED BY | DATE |
|--------------|------|

| Indoor Unit (IDU): DRAW12F1A | Outdoor Unit (ODU): DRA1U12S1A | Wireless Remote Control |
|---------------------------------|--|-------------------------|
| | | |

| CAPACITIES | | |
|---------------------------|--------------------|-------|
| Cooling Capacity (BTU/hr) | Rated ¹ | 12000 |
| | Minimum | 3800 |
| | Maximum | 12800 |
| Heating Capacity (BTU/hr) | Rated ² | 12000 |
| | Minimum | 4500 |
| | Maximum | 13100 |

| EFFICIENCY DATA | | |
|-----------------|------|--|
| SEER | 21.5 | |
| EER | 13.0 | |
| HSPF | 9.8 | |

PRODUCT FEATURES

- Wireless Remote Control with "Follow Me" Technology
- Variable Speed Inverter Compressor
- Auto Restart
- Auto Changeover
- 24-hour Timer
- Self Clean Function

| OUTDOOR TEMPERATURE OPERATION | | |
|-------------------------------|-------------------------------------|--|
| Cooling | –13 °F – 122 °F (–25 °C – 50 °C) | |
| Heating | –13 °F – 86 °F (–25 °C – 30 °C) | |

| ELECTRICAL DATA | |
|---|--------------------------|
| Voltage/Phase/Frequency | 208-230V, 1 Phase, 60 Hz |
| Voltage Range | 187-253V |
| Recommended Breaker (Amps) | 15 |
| Minimum Circuit Ampacity (Amps) | 12 |
| Minimum Wire Size | 16 AWG |
| Rated Current - Cooling (Amps) ¹ | 4.05 |
| Rated Current - Heating (Amps) ² | 4.72 |

¹Measured at 95 °F.

²Measured at 47 °F.





Specifications are subject to change without notice. © 2021 Ferguson Enterprises LLC www.durastar.com



Г

SPECIFICATIONS

| SYSTEM DATA | | |
|--------------------------|----------------|--|
| Refrigerant Type | R-410A | |
| Refrigerant Charge (oz.) | 40.6 | |
| Oil Type | Ester Oil VG74 | |
| Oil Charge (oz.) | 12.5 (370 ml) | |
| Design Pressure (PSIG) | 550/340 | |

| LINE SET REQUIREMENTS | | |
|---------------------------------|-----------------|--|
| Connection Type | Flare | |
| Liquid | Ø1/4" (Ø6.35mm) | |
| Gas | Ø1/2" (Ø12.7mm) | |
| Pre-Charge Length | 25' | |
| Minimum Length | 10' | |
| Maximum Length | 82' | |
| Maximum Height Differential | 33' | |
| Additional Refrigerant (oz./ft) | 0.16 | |

| FAN DATA | | | |
|-----------------------------------|---------------|-----|--|
| Indoor Unit Air Flow (CFM) | Low | 147 | |
| | Medium | 212 | |
| | High | 306 | |
| Moisture Removal (Pints/hr) | 3.17 | | |
| Drain Port O.D. / Drain Hose I.D. | Ø5/8" (Ø16mm) | | |

| SOUND PRESSURE (dB(A)) | | |
|------------------------|--------|------|
| Indoor Unit | Low | 25 |
| | Medium | 30 |
| | High | 36.5 |
| Outdoor Unit | 55 | |


| INDOOR UNIT DIMENSIONS | | |
|------------------------|-----------|-----------|
| Unit Dimensions | Width | 31 9/16" |
| | Depth | 7 7/16" |
| | Height | 11 11/16" |
| Carton Dimensions | Width | 34 7/16" |
| | Depth | 11 1/4" |
| | Height | 14 15/16" |
| Net Weight | 18.7 lbs. | |
| Gross Weight | 24.3 lbs. | |

| OUTDOOR UNIT DIMENSIONS | | |
|-------------------------|-----------|-----------|
| Unit Dimensions | Width | 31 1/2" |
| | Depth | 13 1/8" |
| | Height | 21 13/16" |
| Carton Dimensions | Width | 36" |
| | Depth | 15 3/8" |
| | Height | 24 1/2" |
| Net Weight | 80.5 lbs. | |
| Gross Weight | 86.2 lbs. | |




IDU DIMENSIONS - DRAW12F1A

Unit Dimensions

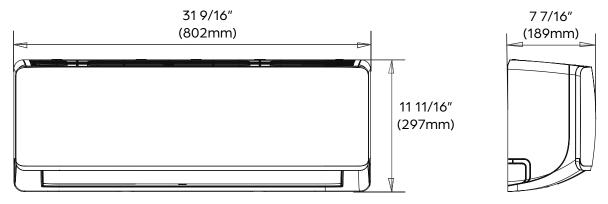


Mounting Plate Dimensions

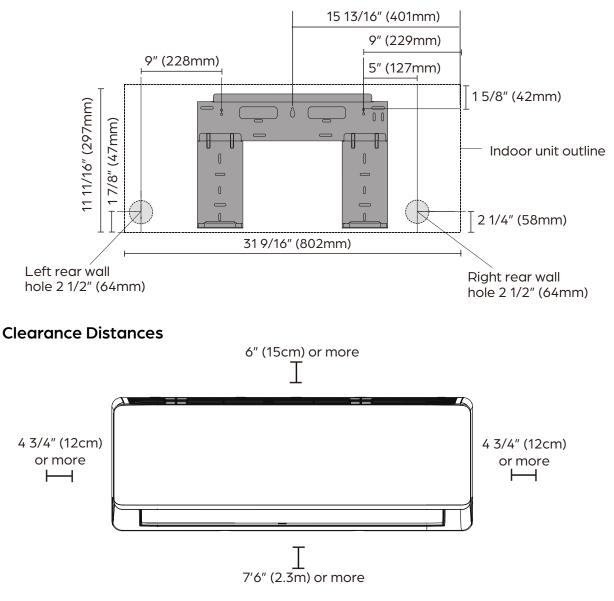



ODU DIMENSIONS - DRA1U12S1A

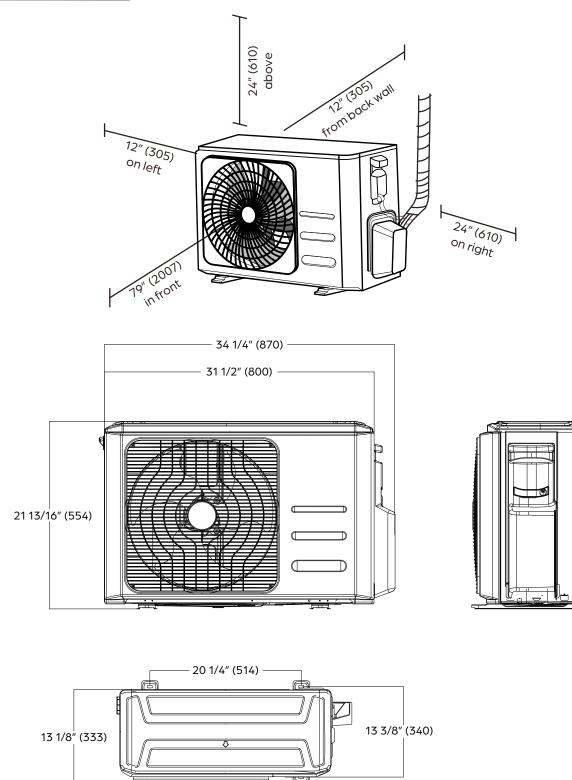

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.