




Multi-Zone Cooling Performance Curves

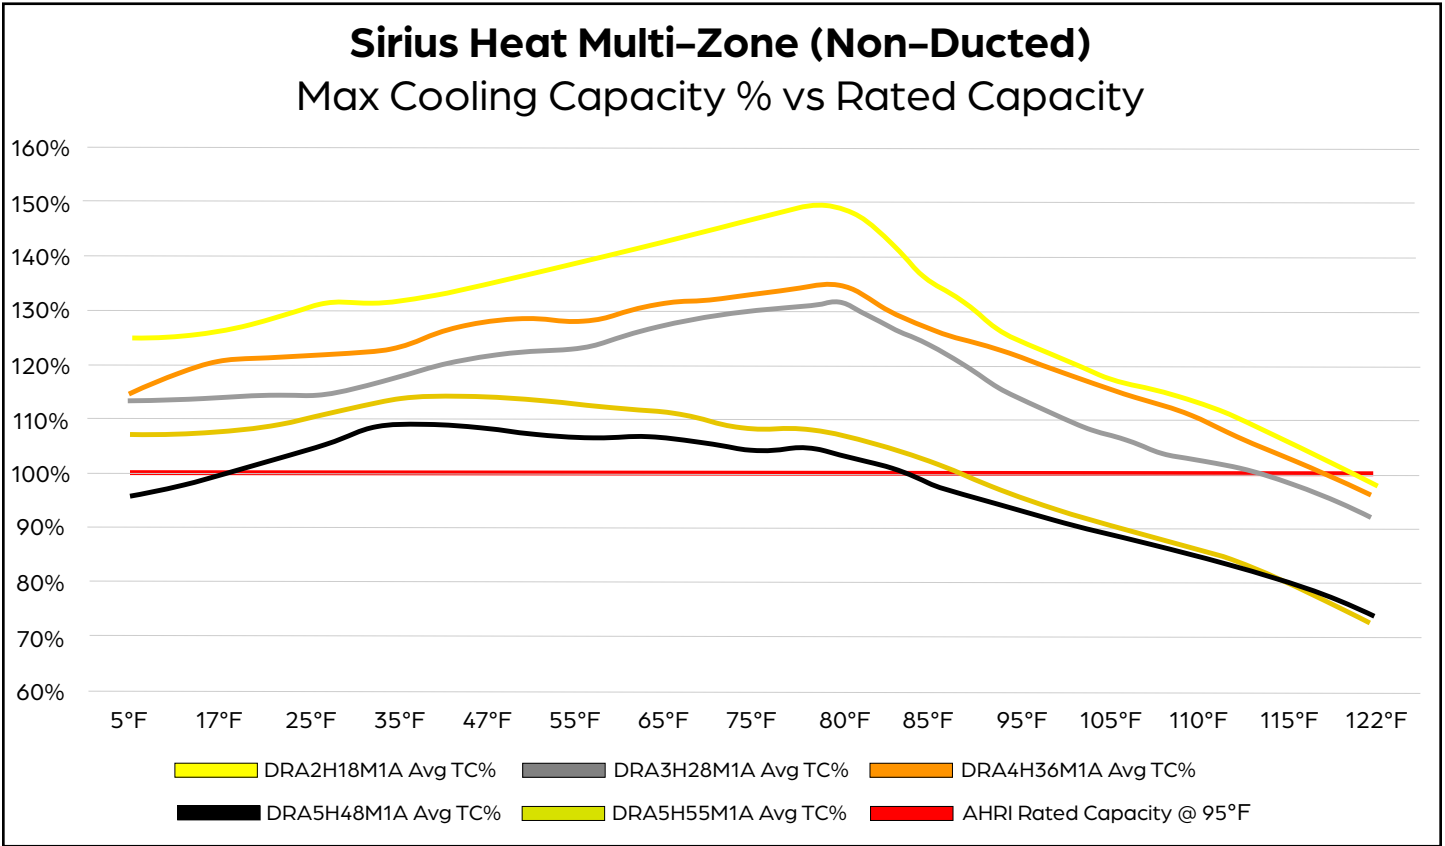

Sirius Heat Non-Ducted Cooling Performance Data*

Cooling			Outdoor Temperature															
Unit	Indoor		TC	5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA2H18M1A + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	21.13	21.50	22.62	22.68	23.16	23.56	24.28	25.12	25.24	23.16	21.11	19.90	19.46	18.11	16.80
			SC	14.56	15.03	16.74	16.40	16.75	17.76	18.99	19.28	19.49	18.47	17.11	16.39	17.61	17.21	16.71
			Input	1.86	1.96	2.03	2.03	2.11	2.16	2.32	2.41	2.54	2.37	2.15	2.17	2.21	2.34	2.40
	70°F (21.1°C)	59°F (15°C)	TC	22.39	22.61	23.57	23.83	24.53	24.85	25.72	26.61	26.85	24.44	22.46	21.15	20.36	18.94	17.63
			SC	15.34	15.73	17.34	17.13	17.64	18.62	19.99	20.33	20.64	19.37	18.11	17.30	18.33	17.91	17.45
			Input	1.86	1.94	2.00	2.03	2.10	2.17	2.34	2.44	2.57	2.35	2.17	2.19	2.22	2.30	2.41
	75°F (23.9°C)	63°F (17.2°C)	TC	23.79	24.05	24.65	24.92	25.58	26.38	27.13	27.80	28.32	25.78	23.79	22.24	21.49	20.00	18.58
			SC	16.22	16.64	18.03	17.82	18.31	19.65	20.99	21.12	21.66	20.31	19.08	18.11	19.27	18.82	18.32
			Input	1.89	1.94	1.99	2.01	2.07	2.18	2.33	2.43	2.55	2.35	2.18	2.17	2.24	2.33	2.42
	80°F (26.7°C)	67°F (19.4°C)	TC	24.89	25.13	25.73	26.26	26.90	27.66	28.41	29.11	29.81	27.25	24.79	23.66	22.55	21.28	19.43
			SC	16.87	17.29	18.71	18.67	19.13	20.47	21.88	21.98	22.69	21.36	19.78	19.16	20.10	19.91	19.06
			Input	1.89	1.95	1.98	2.02	2.09	2.20	2.31	2.42	2.54	2.15	2.17	2.18	2.21	2.34	2.40

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Sirius Heat Non-Ducted Cooling Performance Data* cont.

Cooling			Outdoor Temperature															
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA3H28M1A + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	29.32	29.84	29.34	30.38	31.72	31.48	32.85	33.90	33.82	32.17	29.74	27.92	26.33	25.80	23.77
			SC	20.47	21.24	21.43	22.19	23.88	24.53	25.52	26.54	26.09	25.97	23.89	23.92	23.04	23.89	23.62
			Input	2.08	2.15	2.24	2.29	2.40	2.44	2.61	2.77	2.81	3.22	3.60	3.56	3.59	3.91	3.94
	70°F (21.1°C)	59°F (15°C)	TC	31.13	31.18	31.08	31.98	33.11	33.45	34.58	35.38	35.67	34.01	31.14	29.20	27.78	27.13	25.23
			SC	21.63	22.07	22.60	23.21	24.78	25.94	26.73	27.54	27.35	27.32	24.87	24.87	24.14	24.96	24.98
			Input	2.12	2.16	2.23	2.28	2.38	2.48	2.60	2.72	2.83	3.26	3.57	3.52	3.58	3.90	4.00
	75°F (23.9°C)	63°F (17.2°C)	TC	32.60	32.51	32.78	33.55	34.85	35.44	36.60	37.52	37.83	35.43	32.61	31.03	29.52	28.59	26.42
			SC	22.54	22.87	23.72	24.20	25.91	27.34	28.15	29.05	28.81	28.30	25.93	26.27	25.53	26.16	26.04
			Input	2.09	2.15	2.22	2.29	2.37	2.49	2.61	2.76	2.85	3.20	3.55	3.55	3.57	3.87	4.02
	80°F (26.7°C)	67°F (19.4°C)	TC	34.10	34.44	34.87	35.32	36.68	37.50	38.40	39.25	40.12	37.14	34.33	32.74	31.24	29.81	27.55
			SC	23.46	24.11	25.11	25.33	27.14	28.76	29.38	30.22	30.41	29.49	27.12	27.56	26.90	27.13	27.03
			Input	2.07	2.18	2.23	2.28	2.39	2.50	2.63	2.75	2.89	3.39	3.55	3.56	3.62	3.87	4.01
DRA4H36M1A + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	38.00	39.85	40.65	41.54	42.46	42.45	43.35	44.53	44.84	41.54	40.60	38.78	37.06	34.17	31.80
			SC	26.04	29.01	28.98	30.07	31.34	32.00	33.40	35.58	34.74	33.45	33.14	32.69	33.61	32.09	31.59
			Input	3.07	3.24	3.31	3.47	3.51	3.70	3.92	4.23	4.53	4.71	5.20	5.20	5.25	5.65	6.16
	70°F (21.1°C)	59°F (15°C)	TC	40.22	42.40	42.84	43.36	45.03	44.49	46.06	46.48	46.80	44.14	43.14	40.44	38.81	36.16	33.50
			SC	27.37	30.73	30.34	31.19	33.02	33.33	35.32	36.92	36.04	35.34	35.00	33.89	35.01	33.75	33.14
			Input	3.06	3.25	3.33	3.40	3.52	3.69	3.94	4.19	4.48	4.74	5.21	5.17	5.23	5.67	6.18
	75°F (23.9°C)	63°F (17.2°C)	TC	42.16	44.40	44.81	45.45	47.65	47.28	48.80	49.40	49.63	46.71	45.03	42.30	40.68	38.02	35.53
			SC	28.52	31.98	31.57	32.49	34.73	35.21	37.21	39.05	38.02	37.16	36.34	35.27	36.51	35.30	34.99
			Input	3.03	3.25	3.27	3.37	3.56	3.69	3.96	4.24	4.49	4.75	5.12	5.11	5.22	5.63	6.27
	80°F (26.7°C)	67°F (19.4°C)	TC	44.42	47.08	47.26	47.49	49.74	50.30	50.88	51.45	52.03	49.64	47.21	45.00	42.96	40.15	37.13
			SC	29.90	33.76	33.09	33.77	36.06	37.27	38.62	40.44	39.64	39.27	37.86	37.35	38.32	37.10	36.42
			Input	3.04	3.28	3.31	3.34	3.50	3.71	3.92	4.16	4.44	4.91	5.11	5.17	5.22	5.65	6.21
DRA5H48M1A + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	42.27	43.99	46.48	48.69	48.45	47.27	47.32	45.87	45.93	43.88	41.68	39.47	37.61	35.38	32.27
			SC	30.07	31.03	33.42	35.22	36.67	35.94	35.62	35.44	35.60	34.31	34.35	33.60	33.60	32.48	32.11
			Input	2.76	2.80	3.01	3.13	3.19	3.34	3.53	3.59	3.91	4.14	4.69	4.72	4.71	4.98	5.22
	70°F (21.1°C)	59°F (15°C)	TC	44.73	46.50	48.98	51.15	50.52	49.86	50.29	48.75	48.55	45.94	43.87	41.63	39.75	37.60	34.26
			SC	31.67	32.61	34.99	36.82	38.04	37.71	37.68	37.48	37.46	35.73	35.93	35.25	35.36	34.30	33.94
			Input	2.76	2.84	3.00	3.12	3.15	3.34	3.57	3.66	3.94	4.16	4.69	4.70	4.76	5.03	5.31
	75°F (23.9°C)	63°F (17.2°C)	TC	47.14	48.90	51.13	53.61	53.41	52.54	52.93	51.75	50.83	48.52	46.08	43.96	41.67	39.33	36.21
			SC	33.21	34.11	36.34	38.39	40.02	39.50	39.46	39.60	39.04	37.48	37.52	37.02	36.84	35.68	35.75
			Input	2.76	2.83	2.96	3.10	3.15	3.30	3.55	3.67	3.89	4.18	4.68	4.67	4.70	5.05	5.29
	80°F (26.7°C)	67°F (19.4°C)	TC	49.88	51.53	53.60	56.02	56.46	55.83	55.20	54.59	54.02	50.96	48.46	46.47	44.10	41.40	38.04
			SC	34.92	35.76	37.89	39.89	42.12	41.76	40.96	41.54	41.22	39.19	39.25	38.94	38.80	37.38	37.39
			Input	2.80	2.85	2.95	3.06	3.18	3.33	3.50	3.69	3.92	4.43	4.63	4.70	4.72	5.03	5.24

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Sirius Heat Non-Ducted Cooling Performance Data* cont.

COOLING				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA5H55M1A + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	54.51	54.92	55.44	57.71	58.23	56.99	57.17	55.11	54.47	52.48	48.39	45.34	43.64	40.22	36.69
			SC	38.21	40.23	39.51	42.04	43.48	42.54	44.03	42.11	42.02	42.22	39.32	39.04	39.83	37.95	36.66
			Input	4.06	4.05	4.11	4.33	4.44	4.53	4.71	4.79	5.15	5.61	5.75	5.52	5.67	5.64	5.75
	70°F (21.1°C)	59°F (15°C)	TC	57.38	57.57	58.67	60.94	61.23	60.63	59.62	57.89	57.76	54.72	51.37	48.08	46.28	42.65	38.66
			SC	40.02	41.91	41.58	44.11	45.48	45.05	45.70	44.01	44.30	43.76	41.55	41.14	42.03	40.06	38.46
			Input	4.02	4.05	4.16	4.34	4.47	4.63	4.71	4.76	5.19	5.49	5.85	5.61	5.71	5.72	5.80
	75°F (23.9°C)	63°F (17.2°C)	TC	60.40	60.41	62.28	63.94	63.78	63.62	62.89	60.74	60.42	57.24	53.85	51.10	48.67	45.04	40.95
			SC	41.87	43.71	43.93	45.99	47.12	47.00	47.94	45.91	46.09	45.55	43.35	43.48	43.95	42.08	40.59
			Input	4.00	4.00	4.15	4.34	4.44	4.66	4.77	4.79	5.11	5.51	5.84	5.72	5.75	5.75	5.84
	80°F (26.7°C)	67°F (19.4°C)	TC	62.91	63.38	65.28	67.38	67.63	66.62	65.65	64.62	63.53	60.45	57.10	54.24	51.39	47.66	43.24
			SC	43.41	45.57	45.76	48.24	49.71	48.90	49.76	48.59	48.16	47.87	45.74	45.89	46.15	44.32	42.68
			Input	3.96	4.02	4.15	4.31	4.46	4.59	4.73	4.88	5.08	5.67	5.87	5.81	5.76	5.81	5.87

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb


TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Cooling Performance Curves

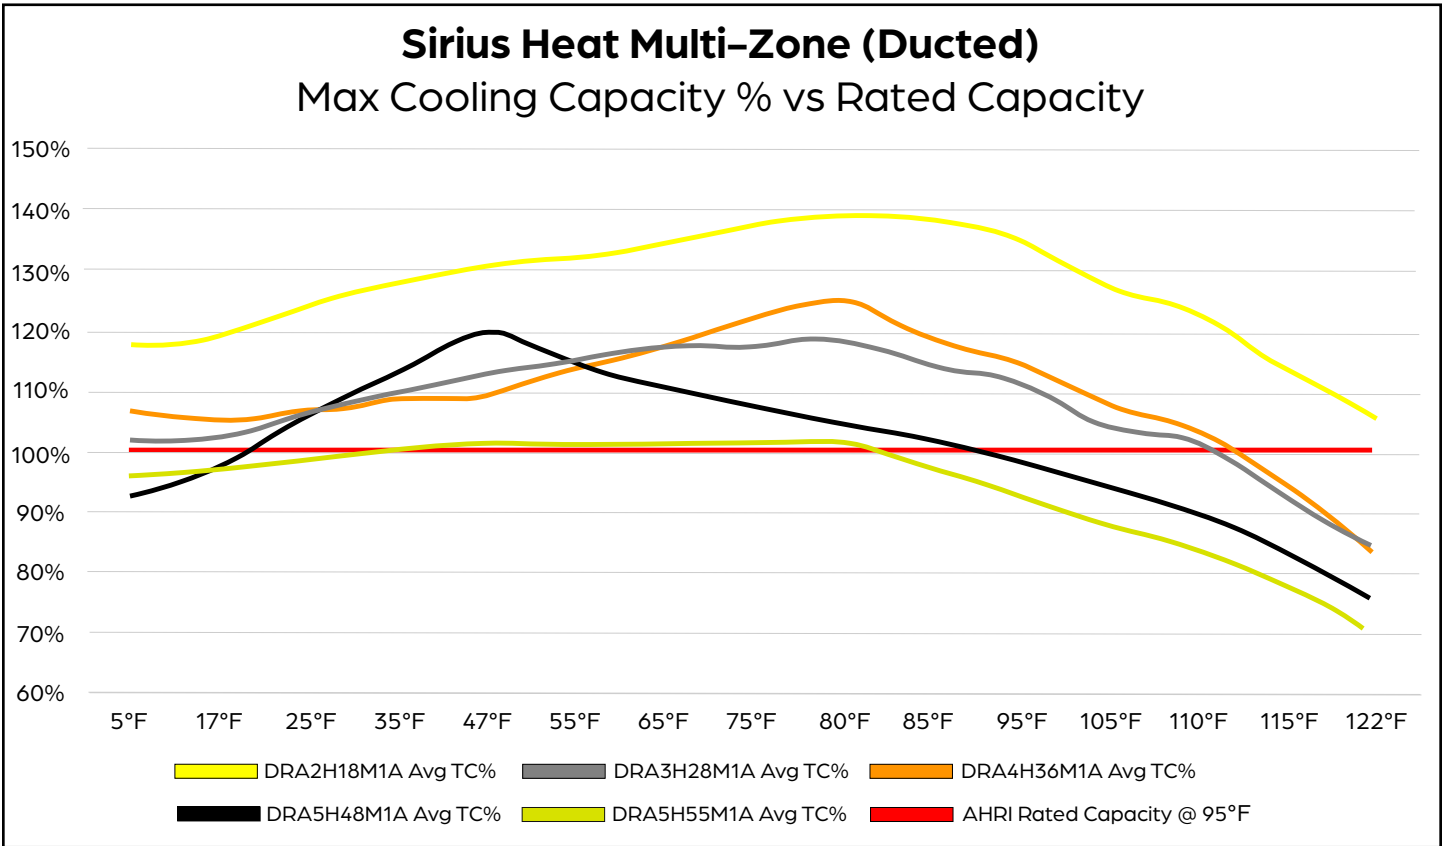

Sirius Heat Ducted Cooling Performance Data*

Cooling			Outdoor Temperature															
Unit	Indoor		TC	5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA2H18M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	19.99	20.51	21.26	22.12	22.42	22.69	22.99	23.62	23.93	23.80	23.18	21.69	21.06	19.18	18.13
			SC	13.44	14.20	15.60	16.12	16.68	17.35	18.15	18.14	18.35	19.22	19.20	18.28	18.73	17.92	18.01
			Input	1.23	1.43	1.62	1.85	1.94	2.01	2.07	2.19	2.27	2.42	2.60	2.58	2.62	2.58	2.82
	70°F (21.1°C)	59°F (15°C)	TC	21.06	21.45	22.52	23.14	23.60	23.81	24.43	24.91	24.93	25.06	24.22	22.83	22.24	20.25	19.12
			SC	14.09	14.78	16.42	16.75	17.47	18.09	19.19	19.04	18.99	20.13	19.96	19.13	19.68	18.81	18.93
			Input	1.24	1.41	1.62	1.82	1.96	2.00	2.09	2.20	2.25	2.40	2.58	2.58	2.60	2.57	2.81
	75°F (23.9°C)	63°F (17.2°C)	TC	22.29	22.53	23.61	24.25	24.84	25.25	25.60	26.03	26.32	26.18	25.71	24.29	23.21	21.54	20.02
			SC	14.83	15.44	17.13	17.44	18.30	19.09	20.02	19.80	19.94	20.92	21.09	20.25	20.41	19.91	19.74
			Input	1.25	1.41	1.62	1.81	1.95	2.01	2.08	2.18	2.25	2.41	2.58	2.58	2.57	2.59	2.77
	80°F (26.7°C)	67°F (19.4°C)	TC	23.41	23.54	24.64	25.56	25.93	26.38	26.84	27.29	27.68	27.36	27.01	25.54	24.31	22.90	20.88
			SC	15.47	16.06	17.77	18.30	19.01	19.84	20.85	20.66	20.87	21.75	22.01	21.17	21.25	21.02	20.48
			Input	1.26	1.39	1.60	1.81	1.92	2.00	2.08	2.16	2.25	2.46	2.60	2.55	2.54	2.64	2.74

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Sirius Heat Ducted Cooling Performance Data* cont.

Cooling			Outdoor Temperature															
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA3H28M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	26.24	26.61	27.75	28.26	28.99	29.76	30.52	30.32	30.34	29.59	28.82	26.89	26.52	23.86	21.40
			SC	18.37	18.91	20.06	21.04	21.92	22.30	22.99	23.37	23.90	24.04	23.83	22.30	23.35	22.11	21.36
			Input	2.17	2.29	2.41	2.52	2.60	2.68	2.81	2.78	2.84	3.27	3.61	3.60	3.67	3.65	3.67
	70°F (21.1°C)	59°F (15°C)	TC	27.71	27.86	28.91	29.71	30.71	31.03	31.89	31.78	32.24	31.15	30.34	28.16	27.68	25.17	22.74
			SC	19.30	19.68	20.76	22.01	23.09	23.14	23.91	24.34	25.25	25.16	24.96	23.20	24.24	23.19	22.61
			Input	2.16	2.29	2.40	2.52	2.59	2.65	2.78	2.79	2.88	3.28	3.62	3.57	3.63	3.67	3.68
	75°F (23.9°C)	63°F (17.2°C)	TC	29.08	29.33	30.34	31.47	32.22	32.87	33.60	33.60	33.98	32.69	32.17	29.83	28.95	26.69	24.14
			SC	20.13	20.62	21.64	23.19	24.11	24.38	25.04	25.61	26.46	26.24	26.34	24.42	25.23	24.44	23.92
			Input	2.15	2.29	2.39	2.52	2.58	2.68	2.80	2.81	2.88	3.26	3.61	3.56	3.58	3.71	3.75
	80°F (26.7°C)	67°F (19.4°C)	TC	30.45	30.61	31.83	32.96	34.24	34.67	35.11	35.55	36.03	34.77	33.51	31.67	30.16	28.12	25.66
			SC	20.95	21.40	22.57	24.12	25.51	25.59	26.02	26.98	27.92	27.78	27.31	25.78	26.15	25.59	25.30
			Input	2.17	2.28	2.39	2.49	2.62	2.69	2.76	2.84	2.91	3.47	3.61	3.57	3.54	3.68	3.82
DRA4H36M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	35.16	34.77	35.27	36.72	36.08	37.91	38.81	40.38	41.06	39.14	38.36	35.62	34.92	31.49	27.60
			SC	24.95	24.41	24.98	26.53	26.17	29.62	29.98	31.16	32.31	30.26	31.30	30.67	30.86	29.62	27.37
			Input	2.82	2.86	2.98	3.11	3.13	3.43	3.64	4.00	4.27	4.13	4.08	3.96	4.08	3.92	3.80
	70°F (21.1°C)	59°F (15°C)	TC	37.24	36.79	37.08	38.37	38.14	39.70	41.07	42.96	43.49	41.34	39.95	37.66	36.38	33.28	28.78
			SC	26.30	25.67	26.13	27.58	27.52	30.86	31.54	33.00	34.01	31.80	32.45	32.22	31.95	31.14	28.42
			Input	2.82	2.90	3.00	3.10	3.14	3.44	3.68	4.03	4.33	4.17	4.04	3.95	4.06	3.92	3.73
	75°F (23.9°C)	63°F (17.2°C)	TC	39.37	38.81	39.33	40.14	40.40	41.83	43.14	44.89	46.17	43.88	42.24	40.06	38.13	34.74	30.59
			SC	27.63	26.94	27.57	28.67	28.98	32.34	32.94	34.31	35.89	33.60	34.09	34.09	33.29	32.33	30.09
			Input	2.85	2.92	2.99	3.07	3.19	3.44	3.68	4.03	4.33	4.18	4.07	3.99	4.02	3.92	3.80
	80°F (26.7°C)	67°F (19.4°C)	TC	41.84	41.29	41.57	41.81	42.93	44.27	45.70	47.10	48.55	46.58	44.32	42.08	39.89	36.61	32.51
			SC	29.20	28.53	28.98	29.69	30.61	34.04	34.73	35.80	37.53	35.45	35.54	35.64	34.62	33.90	31.86
			Input	2.86	2.93	3.00	3.07	3.26	3.48	3.73	4.01	4.29	3.92	4.04	4.01	3.96	3.96	3.87
DRA5H48M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	41.05	43.12	47.39	50.29	53.28	50.37	48.55	48.15	46.79	45.07	43.39	41.79	40.13	36.91	33.35
			SC	28.79	30.36	34.42	37.60	38.57	38.21	38.45	37.43	36.87	35.95	34.95	35.32	35.53	34.49	33.23
			Input	2.81	3.03	3.41	3.55	3.98	3.88	3.98	4.16	4.09	4.41	4.80	4.80	4.84	4.99	4.96
	70°F (21.1°C)	59°F (15°C)	TC	43.39	45.29	49.52	52.60	55.85	53.07	51.48	50.53	49.15	47.59	45.53	43.76	42.20	38.69	35.11
			SC	30.25	31.71	35.80	39.15	40.23	40.04	40.52	39.03	38.50	37.77	36.44	36.78	37.12	35.93	34.84
			Input	2.85	3.03	3.37	3.57	3.93	3.91	4.03	4.11	4.11	4.47	4.74	4.77	4.85	4.98	5.01
	75°F (23.9°C)	63°F (17.2°C)	TC	45.39	47.72	51.80	54.85	58.79	56.46	54.65	52.63	51.25	49.89	48.28	45.87	43.96	40.94	37.27
			SC	31.46	33.25	37.24	40.60	42.11	42.37	42.83	40.46	39.93	39.41	38.47	38.34	38.46	37.80	36.84
			Input	2.82	3.05	3.38	3.53	3.93	3.95	4.03	4.09	4.10	4.48	4.81	4.78	4.76	5.00	5.10
	80°F (26.7°C)	67°F (19.4°C)	TC	48.08	50.72	54.35	58.29	61.95	59.81	57.65	55.63	53.72	52.51	51.31	48.59	46.18	42.96	39.11
			SC	33.13	35.15	38.86	42.90	44.17	44.62	44.91	42.50	41.58	41.22	40.69	40.38	40.22	39.44	38.48
			Input	2.85	3.10	3.34	3.60	3.98	4.00	4.03	4.08	4.12	4.65	4.85	4.79	4.75	4.98	5.10

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Sirius Heat Ducted Cooling Performance Data* cont.

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA5H55M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	48.92	49.49	50.06	51.13	51.61	51.57	51.12	51.89	51.00	50.17	47.30	44.77	42.43	39.63	35.17
			SC	33.57	35.10	36.47	37.75	38.51	39.65	38.45	41.23	40.77	38.97	38.65	38.38	38.40	37.16	35.00
			Input	3.91	4.02	4.44	5.06	5.01	5.02	5.01	5.16	5.07	5.58	5.98	5.88	5.96	6.06	6.02
	70°F (21.1°C)	59°F (15°C)	TC	51.12	52.04	52.48	53.76	54.21	53.84	54.03	54.45	53.80	52.69	49.27	46.73	44.95	41.62	37.33
			SC	34.87	36.71	38.02	39.46	40.20	41.19	40.44	43.03	42.81	40.71	40.03	39.86	40.43	38.84	37.02
			Input	3.87	4.04	4.41	5.00	5.03	5.01	5.00	5.10	5.08	5.53	5.90	5.83	5.94	6.01	6.12
	75°F (23.9°C)	63°F (17.2°C)	TC	53.53	54.20	55.53	56.95	56.53	56.37	57.12	57.44	56.93	55.06	52.19	49.19	46.82	43.54	38.89
			SC	36.33	38.04	40.05	41.61	41.65	42.93	42.52	45.14	45.04	42.34	42.16	41.72	41.89	40.40	38.39
			Input	3.87	4.00	4.40	4.98	4.99	5.03	5.03	5.11	5.14	5.55	5.91	5.88	5.85	6.03	6.07
	80°F (26.7°C)	67°F (19.4°C)	TC	56.16	56.76	58.03	59.58	59.63	59.72	59.81	59.89	59.99	57.36	55.11	52.33	49.60	46.02	41.32
			SC	37.91	39.62	41.66	43.31	43.71	45.21	44.32	46.78	47.21	43.82	44.31	44.17	44.10	42.48	40.62
			Input	3.83	3.95	4.38	4.93	4.97	5.01	5.06	5.10	5.15	5.72	5.95	5.89	5.83	6.02	6.08

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb


TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Cooling Performance Curves

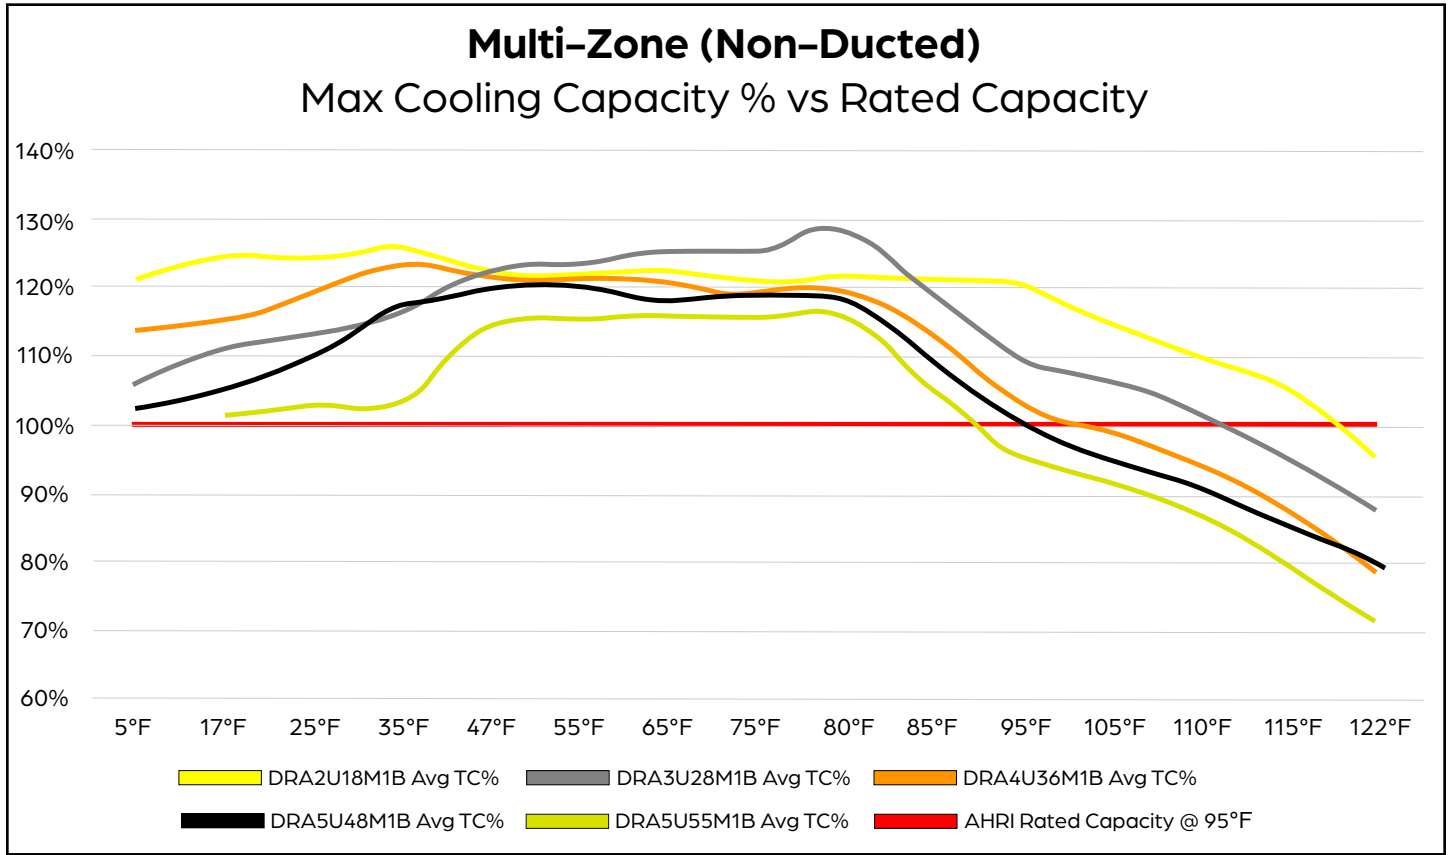

Non-Ducted Cooling Performance Data*

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA2U18M1B + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	20.15	20.89	20.50	20.93	20.17	20.06	20.40	19.95	20.34	20.31	19.90	19.31	18.36	17.63	15.78
			SC	14.03	14.60	14.78	15.34	14.69	15.36	15.44	15.50	15.51	15.96	16.28	16.36	16.75	16.36	15.69
			Input	1.63	1.69	1.72	1.77	1.82	1.77	1.89	1.83	1.95	1.97	2.00	2.03	2.06	2.30	2.41
	70°F (21.1°C)	59°F (15°C)	TC	21.17	21.83	21.62	21.87	21.39	21.25	21.61	21.13	21.50	21.26	21.17	20.12	19.28	18.50	16.73
			SC	14.64	15.16	15.49	15.94	15.49	16.19	16.27	16.33	16.32	16.63	17.24	16.94	17.48	17.08	16.57
			Input	1.62	1.68	1.70	1.76	1.82	1.80	1.89	1.84	1.94	1.95	2.00	2.03	2.08	2.29	2.41
	75°F (23.9°C)	63°F (17.2°C)	TC	22.14	22.81	22.91	23.21	22.51	22.61	22.63	22.24	22.39	22.15	22.17	21.09	20.28	19.34	17.54
			SC	15.22	15.74	16.31	16.84	16.20	17.13	16.94	17.10	16.91	17.23	17.95	17.66	18.28	17.74	17.30
			Input	1.61	1.68	1.72	1.79	1.81	1.84	1.89	1.86	1.92	1.94	2.01	2.04	2.06	2.26	2.43
	80°F (26.7°C)	67°F (19.4°C)	TC	23.53	24.16	24.37	24.54	23.85	23.75	23.64	23.54	23.42	23.42	23.41	22.29	21.30	20.14	18.44
			SC	16.10	16.60	17.28	17.72	17.07	17.90	17.61	18.01	17.59	18.12	18.87	18.55	19.08	18.37	18.13
			Input	1.61	1.71	1.75	1.79	1.82	1.84	1.86	1.88	1.90	1.99	2.03	2.03	2.07	2.24	2.41

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Non-Ducted Cooling Performance Data* cont.

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA3U28M1B + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	26.17	27.81	28.26	29.03	30.65	30.62	31.27	31.25	32.43	29.55	27.07	26.65	25.51	23.63	21.67
			SC	1798	19.50	20.62	21.53	22.44	22.97	24.27	24.57	25.68	23.18	21.55	22.33	22.31	22.34	21.68
			Input	2.01	2.25	2.24	2.27	2.56	2.65	2.74	2.69	2.91	3.01	3.21	3.32	3.40	3.55	3.69
	70°F (21.1°C)	59°F (15°C)	TC	27.55	29.12	29.53	30.37	31.99	32.23	32.98	32.96	33.85	31.40	28.59	28.02	26.71	25.00	23.03
			SC	18.83	20.32	21.44	22.38	23.30	24.06	25.45	25.79	26.66	24.51	22.63	23.36	23.22	23.53	22.94
			Input	2.02	2.22	2.25	2.27	2.57	2.64	2.77	2.72	2.90	3.04	3.24	3.35	3.35	3.59	3.76
	75°F (23.9°C)	63°F (17.2°C)	TC	29.27	30.65	31.25	32.27	33.92	34.28	34.68	34.59	35.29	32.91	30.32	29.47	28.06	26.24	24.09
			SC	19.91	21.29	22.58	23.64	24.60	25.45	26.61	26.93	27.62	25.56	23.87	24.42	24.26	24.57	23.89
			Input	2.02	2.20	2.25	2.31	2.56	2.65	2.74	2.72	2.87	3.04	3.24	3.38	3.37	3.59	3.76
	80°F (26.7°C)	67°F (19.4°C)	TC	31.08	32.23	33.07	33.97	35.60	35.94	36.28	36.64	37.00	34.53	32.22	30.82	29.32	27.59	25.41
			SC	21.01	22.27	23.78	24.73	25.67	26.52	27.68	28.36	28.78	26.66	25.23	25.40	25.21	25.69	25.11
			Input	2.02	2.18	2.25	2.33	2.57	2.63	2.70	2.77	2.85	3.16	3.28	3.33	3.35	3.57	3.73
DRA4U36M1B + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	37.70	38.27	39.84	41.21	40.34	40.43	40.26	39.13	39.50	38.24	34.29	32.97	31.40	29.12	26.13
			SC	25.64	26.48	29.32	30.37	29.21	30.79	30.65	30.55	30.43	29.58	28.11	27.47	27.95	27.31	26.06
			Input	2.87	3.01	3.09	3.21	3.29	3.41	3.56	3.43	3.71	4.02	4.17	4.24	4.23	4.57	4.91
	70°F (21.1°C)	59°F (15°C)	TC	39.77	40.20	41.76	43.20	42.87	42.33	42.56	41.45	41.98	39.92	35.98	34.64	33.16	30.39	27.45
			SC	26.87	27.66	30.60	31.64	30.88	32.08	32.19	32.16	32.19	30.71	29.36	28.71	29.36	28.36	27.26
			Input	2.88	3.03	3.06	3.22	3.31	3.40	3.57	3.49	3.74	3.98	4.20	4.24	4.29	4.49	4.94
	75°F (23.9°C)	63°F (17.2°C)	TC	42.04	42.31	44.00	45.38	44.89	44.89	44.43	43.91	44.09	41.58	38.19	36.57	34.57	32.30	28.83
			SC	28.24	28.93	32.09	33.03	32.19	33.84	33.43	33.88	33.65	31.79	30.99	30.14	30.47	29.97	28.51
			Input	2.88	3.00	3.10	3.19	3.29	3.40	3.50	3.54	3.70	3.93	4.22	4.24	4.24	4.56	4.92
	80°F (26.7°C)	67°F (19.4°C)	TC	43.97	44.40	46.12	47.72	47.06	46.91	46.76	46.61	46.46	43.31	40.16	38.50	36.55	33.96	30.54
			SC	29.37	30.19	33.44	34.55	33.55	35.18	35.03	35.80	35.27	32.96	32.41	31.53	32.02	31.31	30.09
			Input	2.89	2.97	3.08	3.19	3.28	3.37	3.47	3.57	3.70	4.05	4.18	4.24	4.26	4.60	4.97
DRA5U48M1B + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	45.52	46.56	48.92	51.84	53.56	53.27	52.58	52.91	52.22	48.03	44.16	41.84	40.44	37.82	35.28
			SC	32.08	32.59	36.15	38.44	40.15	40.91	40.41	42.42	41.56	38.47	34.96	35.77	35.93	35.15	35.25
			Input	3.30	3.34	3.46	3.50	3.68	3.92	3.99	4.18	4.28	4.64	4.98	5.03	5.11	5.45	6.19
	70°F (21.1°C)	59°F (15°C)	TC	47.57	49.48	51.22	54.68	56.02	56.37	55.06	55.40	54.86	51.04	46.68	44.37	42.34	39.73	37.26
			SC	33.32	34.44	37.67	40.29	41.79	43.04	42.10	44.21	43.38	40.69	36.78	37.75	37.44	36.73	37.08
			Input	3.25	3.35	3.43	3.52	3.67	3.93	3.98	4.16	4.31	4.72	5.03	5.11	5.09	5.46	6.15
	75°F (23.9°C)	63°F (17.2°C)	TC	50.34	51.70	54.03	57.32	58.60	58.96	58.14	58.56	58.17	54.07	49.29	46.51	44.38	42.04	39.09
			SC	35.06	35.76	39.53	42.01	43.51	44.78	44.22	46.46	45.79	42.86	38.63	39.35	39.04	38.68	38.74
			Input	3.24	3.30	3.42	3.53	3.67	3.91	4.03	4.21	4.36	4.79	5.08	5.05	5.11	5.51	6.07
	80°F (26.7°C)	67°F (19.4°C)	TC	52.55	54.25	57.36	60.53	61.69	61.55	61.40	61.26	61.10	56.61	51.45	49.27	46.82	44.49	40.94
			SC	36.41	37.33	41.76	44.13	45.59	46.47	46.48	48.33	47.84	44.61	40.13	41.49	40.97	40.75	40.36
			Input	3.19	3.29	3.44	3.58	3.71	3.85	4.01	4.18	4.37	4.83	5.02	5.10	5.12	5.58	6.09

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Non-Ducted Cooling Performance Data* cont.

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA5U55M1B + Non-Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	50.60	51.27	51.67	51.71	58.17	58.65	59.52	58.40	58.94	53.26	48.29	46.58	44.01	40.20	36.33
			SC	34.58	37.12	37.25	37.30	42.88	45.74	44.76	46.91	46.77	41.50	38.92	39.40	38.67	38.06	36.24
			Input	3.86	4.07	4.12	4.14	4.78	4.84	5.02	5.01	5.13	5.29	5.69	5.79	5.66	5.87	5.90
	70°F (21.1°C)	59°F (15°C)	TC	53.60	53.80	54.91	55.02	61.42	62.07	62.39	61.67	61.52	55.60	50.83	49.19	45.99	42.54	37.96
			SC	36.41	38.72	39.36	39.50	44.99	48.16	46.70	49.23	48.52	43.05	40.78	41.40	40.18	40.07	37.73
			Input	3.87	4.04	4.17	4.22	4.77	4.91	5.02	5.02	5.06	5.25	5.66	5.81	5.68	5.85	5.84
	75°F (23.9°C)	63°F (17.2°C)	TC	57.03	56.51	57.92	58.53	63.98	64.65	64.99	65.39	64.97	59.02	53.56	51.51	48.82	44.59	39.92
			SC	38.54	40.46	41.25	41.79	46.57	49.88	48.38	51.93	50.98	45.44	42.76	43.08	42.42	41.76	39.50
			Input	3.92	4.02	4.18	4.27	4.76	4.81	4.92	5.06	5.08	5.33	5.68	5.79	5.67	5.85	5.84
	80°F (26.7°C)	67°F (19.4°C)	TC	59.53	60.12	61.16	62.06	67.99	68.20	68.41	68.62	68.82	62.45	56.92	54.16	51.23	47.43	42.02
			SC	40.00	42.81	43.30	44.07	49.23	52.38	50.62	54.14	53.68	47.84	45.20	45.01	44.26	44.16	41.43
			Input	3.86	4.06	4.17	4.27	4.75	4.84	4.94	5.05	5.16	5.60	5.79	5.76	5.67	5.85	5.90

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb


TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Cooling Performance Curves

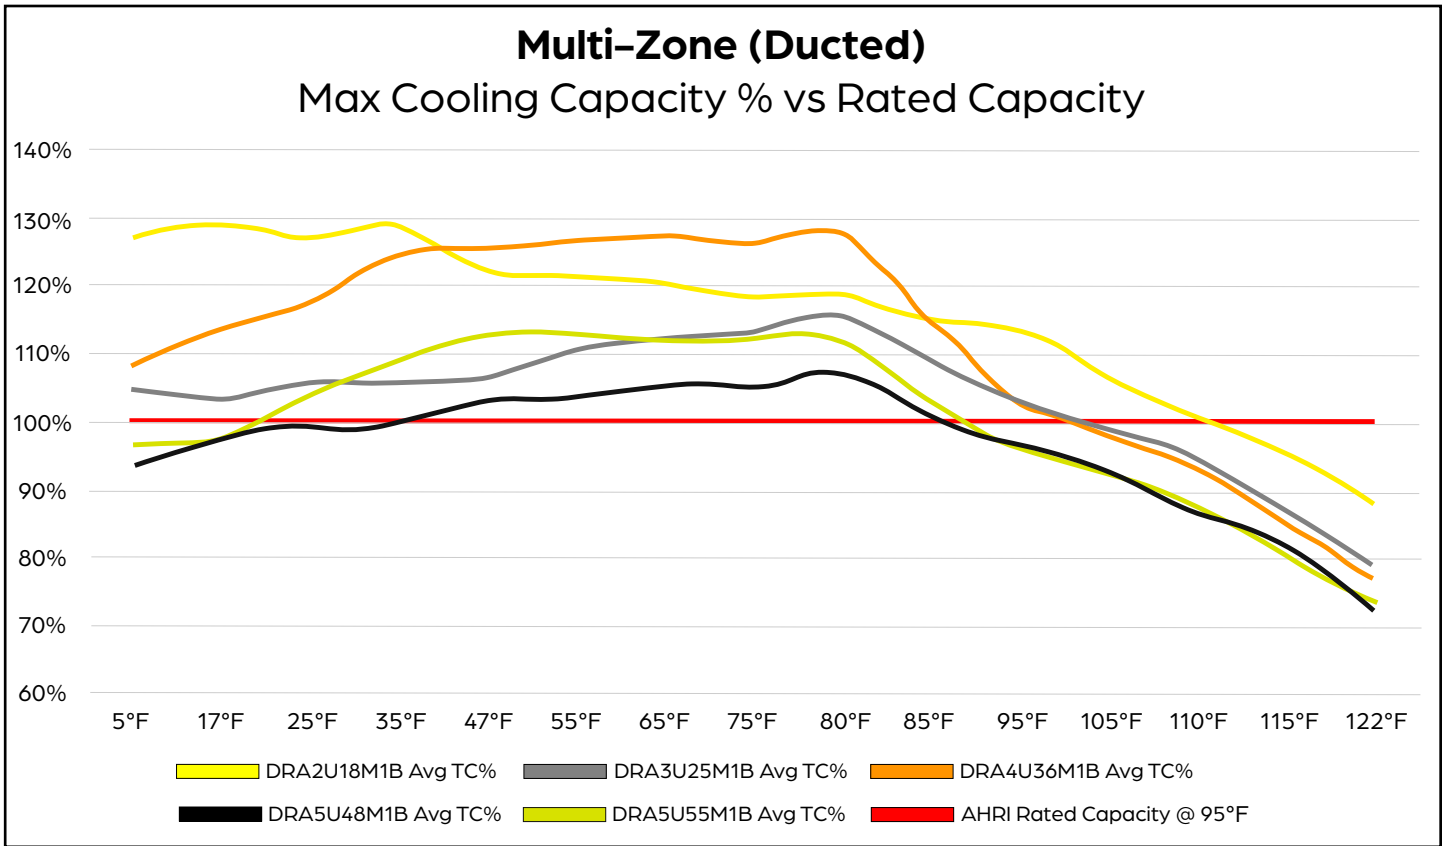

Ducted Cooling Performance Data*

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA2U18M1B + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	21.36	21.58	21.23	21.37	20.36	20.36	20.23	19.72	19.86	19.17	18.85	17.67	16.58	15.74	14.61
			SC	14.77	15.52	15.00	15.95	14.98	15.22	15.65	15.62	15.91	14.91	15.58	14.56	14.98	14.43	14.61
			Input	1.84	1.88	1.82	1.85	1.86	1.88	1.90	1.88	1.88	1.96	2.12	2.05	1.97	2.04	2.13
	70°F (21.1°C)	59°F (15°C)	TC	22.32	22.67	22.32	22.54	21.55	21.30	21.08	20.80	20.80	20.22	19.95	18.74	17.45	16.70	15.54
			SC	15.35	16.20	15.68	16.73	15.77	15.83	16.21	16.38	16.55	15.62	16.38	15.37	15.69	15.21	15.48
			Input	1.82	1.87	1.82	1.86	1.85	1.88	1.90	1.87	1.88	1.95	2.11	2.04	1.96	2.07	2.14
	75°F (23.9°C)	63°F (17.2°C)	TC	23.35	23.69	23.35	23.73	22.58	22.30	22.12	21.71	21.82	21.13	20.95	19.52	18.54	17.74	16.32
			SC	15.96	16.83	16.33	17.51	16.44	16.47	16.91	17.01	17.27	16.22	17.11	15.93	16.57	16.07	16.20
			Input	1.80	1.83	1.83	1.85	1.86	1.88	1.88	1.85	1.86	1.95	2.09	2.02	2.00	2.10	2.12
	80°F (26.7°C)	67°F (19.4°C)	TC	24.32	24.70	24.79	24.90	23.53	23.35	23.18	23.02	22.85	22.38	21.92	20.77	19.73	18.54	17.05
			SC	16.54	17.46	17.23	18.28	17.03	17.14	17.64	17.93	17.98	17.10	17.80	16.84	17.54	16.71	16.85
			Input	1.77	1.82	1.82	1.83	1.85	1.85	1.86	1.87	1.87	2.04	2.07	2.05	2.03	2.07	2.10

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Ducted Cooling Performance Data* cont.

Cooling			Outdoor Temperature															
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA3U28M1B + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	26.96	26.66	27.64	27.32	27.41	28.83	29.34	29.30	29.65	27.86	26.55	25.53	24.56	22.50	20.24
			SC	19.10	18.58	19.93	20.05	20.59	21.51	22.13	23.30	23.53	22.07	21.08	21.50	21.67	20.76	20.26
			Input	2.89	2.84	3.06	3.03	3.15	3.38	3.47	3.50	3.54	3.52	3.38	3.40	3.41	3.42	3.42
	70°F (21.1°C)	59°F (15°C)	TC	28.31	28.09	28.79	29.00	29.13	30.19	30.57	30.88	31.37	29.64	27.92	27.07	25.91	23.49	21.44
			SC	19.96	19.45	20.66	21.18	21.78	22.38	22.94	24.40	24.78	23.37	22.04	22.69	22.75	21.54	21.36
			Input	2.90	2.84	3.05	3.07	3.18	3.36	3.42	3.51	3.60	3.55	3.41	3.44	3.41	3.36	3.43
	75°F (23.9°C)	63°F (17.2°C)	TC	30.06	29.60	30.30	30.46	30.47	31.71	32.07	32.47	33.38	31.40	29.64	28.26	27.10	24.94	22.52
			SC	21.09	20.39	21.62	22.14	22.68	23.38	23.91	25.51	26.20	24.60	23.28	23.57	23.69	22.76	22.36
			Input	2.91	2.84	3.02	3.09	3.17	3.35	3.39	3.51	3.66	3.53	3.43	3.38	3.35	3.37	3.39
	80°F (26.7°C)	67°F (19.4°C)	TC	31.84	31.42	31.57	31.73	32.41	33.03	33.62	34.25	34.80	33.08	31.40	29.78	28.26	26.25	23.86
			SC	22.22	21.53	22.38	22.91	23.99	24.25	24.95	26.75	27.18	25.80	24.55	24.72	24.58	23.81	23.57
			Input	2.91	2.89	2.99	3.09	3.20	3.30	3.40	3.50	3.60	3.36	3.42	3.37	3.35	3.39	3.39
DRA4U36M1B + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	35.87	37.89	38.78	41.94	42.08	42.56	42.68	41.96	42.52	38.23	34.36	32.47	31.22	28.28	25.95
			SC	24.66	27.02	27.92	30.35	31.40	32.32	32.63	33.55	33.22	31.04	27.87	26.76	27.42	26.90	25.83
			Input	2.24	2.61	2.72	3.00	3.17	3.29	3.45	3.54	3.77	3.89	4.25	4.16	4.15	4.19	4.25
	70°F (21.1°C)	59°F (15°C)	TC	37.52	39.55	40.78	43.77	44.16	44.38	45.02	44.35	45.00	39.91	36.06	34.40	32.59	29.70	27.03
			SC	25.66	28.08	29.19	31.48	32.79	33.52	34.26	35.28	34.96	32.23	29.09	28.22	28.49	28.10	26.79
			Input	2.21	2.59	2.70	2.98	3.13	3.23	3.42	3.56	3.82	3.85	4.25	4.19	4.16	4.16	4.17
	75°F (23.9°C)	63°F (17.2°C)	TC	39.87	41.54	43.33	45.60	46.00	46.37	46.94	46.34	47.12	42.18	38.19	36.32	34.41	31.43	28.19
			SC	27.14	29.36	30.84	32.63	33.96	34.85	35.55	36.63	36.41	33.87	30.67	29.64	29.92	29.55	27.83
			Input	2.26	2.57	2.76	2.94	3.07	3.22	3.38	3.54	3.76	3.91	4.23	4.16	4.14	4.16	4.14
	80°F (26.7°C)	67°F (19.4°C)	TC	42.28	44.05	45.95	48.10	48.52	48.71	48.90	49.09	49.29	44.88	40.29	38.31	36.26	33.23	29.45
			SC	28.63	30.97	32.54	34.20	35.66	36.43	36.82	38.59	37.90	35.81	32.15	31.11	31.36	31.07	28.95
			Input	2.28	2.60	2.77	2.96	3.07	3.21	3.37	3.54	3.73	4.05	4.24	4.19	4.15	4.19	4.09
DRA5U48M1B + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	42.10	43.90	45.66	45.02	46.24	46.76	47.88	47.86	49.30	45.78	43.77	42.09	39.39	37.18	32.44
			SC	29.84	31.86	33.92	32.96	34.86	35.36	36.26	38.16	38.63	36.05	34.84	34.78	36.03	35.24	32.27
			Input	3.56	3.89	4.14	4.09	4.31	4.42	4.57	4.58	4.70	4.82	5.22	5.33	5.09	5.42	5.67
	70°F (21.1°C)	59°F (15°C)	TC	44.74	46.16	47.67	47.49	49.19	49.06	50.78	50.06	51.46	47.69	46.03	44.07	41.56	39.38	34.44
			SC	31.54	33.34	35.19	34.56	36.84	36.91	38.22	39.69	40.11	37.39	36.43	36.24	37.79	37.11	34.13
			Input	3.56	3.92	4.07	4.11	4.34	4.41	4.59	4.53	4.63	4.80	5.24	5.25	5.08	5.48	5.65
	75°F (23.9°C)	63°F (17.2°C)	TC	46.65	48.89	50.23	50.10	51.78	52.03	52.89	53.03	53.60	50.52	48.25	46.73	43.88	41.02	36.33
			SC	32.69	35.16	36.90	36.24	38.54	38.91	39.58	41.81	41.52	39.40	38.00	38.22	39.67	38.43	35.87
			Input	3.50	3.90	4.12	4.13	4.33	4.40	4.54	4.57	4.62	4.79	5.25	5.29	5.10	5.43	5.61
	80°F (26.7°C)	67°F (19.4°C)	TC	49.00	52.02	52.54	53.18	54.74	55.00	55.27	55.53	55.83	53.68	51.11	48.68	46.00	43.00	38.48
			SC	34.15	37.19	38.35	38.29	40.50	40.92	41.18	43.54	42.99	41.60	40.07	39.63	41.40	40.03	37.79
			Input	3.51	3.98	4.06	4.14	4.39	4.42	4.46	4.50	4.54	5.09	5.23	5.19	5.13	5.39	5.62

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)

Specifications are subject to change without notice.
©2023 Ferguson Enterprises, LLC V1.0_03.23



Ducted Cooling Performance Data* cont.

Cooling				Outdoor Temperature														
Unit	Indoor			5°C	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F
	DB	WB		-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C
DRA5H55M1A + Ducted	65°F (18.3°C)	54°F (12.2°C)	TC	49.02	49.30	52.57	55.92	57.52	57.54	56.79	56.94	57.21	52.12	48.37	47.30	44.84	40.74	37.35
			SC	32.94	35.95	37.47	41.04	41.63	44.26	44.03	44.51	44.68	42.30	39.96	40.75	39.19	38.89	37.32
			Input	3.08	3.54	3.97	4.55	4.74	4.95	5.05	5.25	5.50	5.65	5.90	6.10	6.02	6.19	6.59
	70°F (21.1°C)	59°F (15°C)	TC	51.60	52.11	55.39	58.31	60.42	60.31	59.47	59.93	59.90	55.39	50.86	49.69	47.20	43.02	38.98
			SC	34.49	37.82	39.24	42.54	43.51	46.15	45.88	46.63	46.49	44.68	41.77	42.59	41.06	40.88	38.78
			Input	3.12	3.54	3.98	4.48	4.76	4.98	5.02	5.23	5.42	5.77	5.88	6.05	6.03	6.20	6.57
	75°F (23.9°C)	63°F (17.2°C)	TC	54.14	55.03	58.87	60.74	63.60	63.76	63.26	63.42	62.53	57.88	54.05	51.86	49.32	45.38	41.30
			SC	36.00	39.70	41.46	44.06	45.51	48.56	48.50	49.02	48.29	46.47	44.13	44.17	42.66	42.87	40.93
			Input	3.14	3.52	4.00	4.39	4.74	4.98	5.05	5.23	5.40	5.68	5.98	6.02	6.02	6.22	6.57
	80°F (26.7°C)	67°F (19.4°C)	TC	57.05	58.41	61.38	64.41	66.59	66.48	66.38	66.27	66.17	61.25	57.14	54.03	51.43	47.92	43.70
			SC	37.71	41.94	43.03	46.50	47.35	50.39	50.65	50.90	50.82	48.88	46.40	45.76	44.28	45.00	43.13
			Input	3.15	3.59	3.99	4.42	4.76	4.91	5.06	5.24	5.41	5.76	6.03	5.97	5.91	6.20	6.59

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

SC --- Sensible Capacity (1000 Btu/hour)

Input --- Total Power (kW)