




Multi-Zone Heating Performance Curves

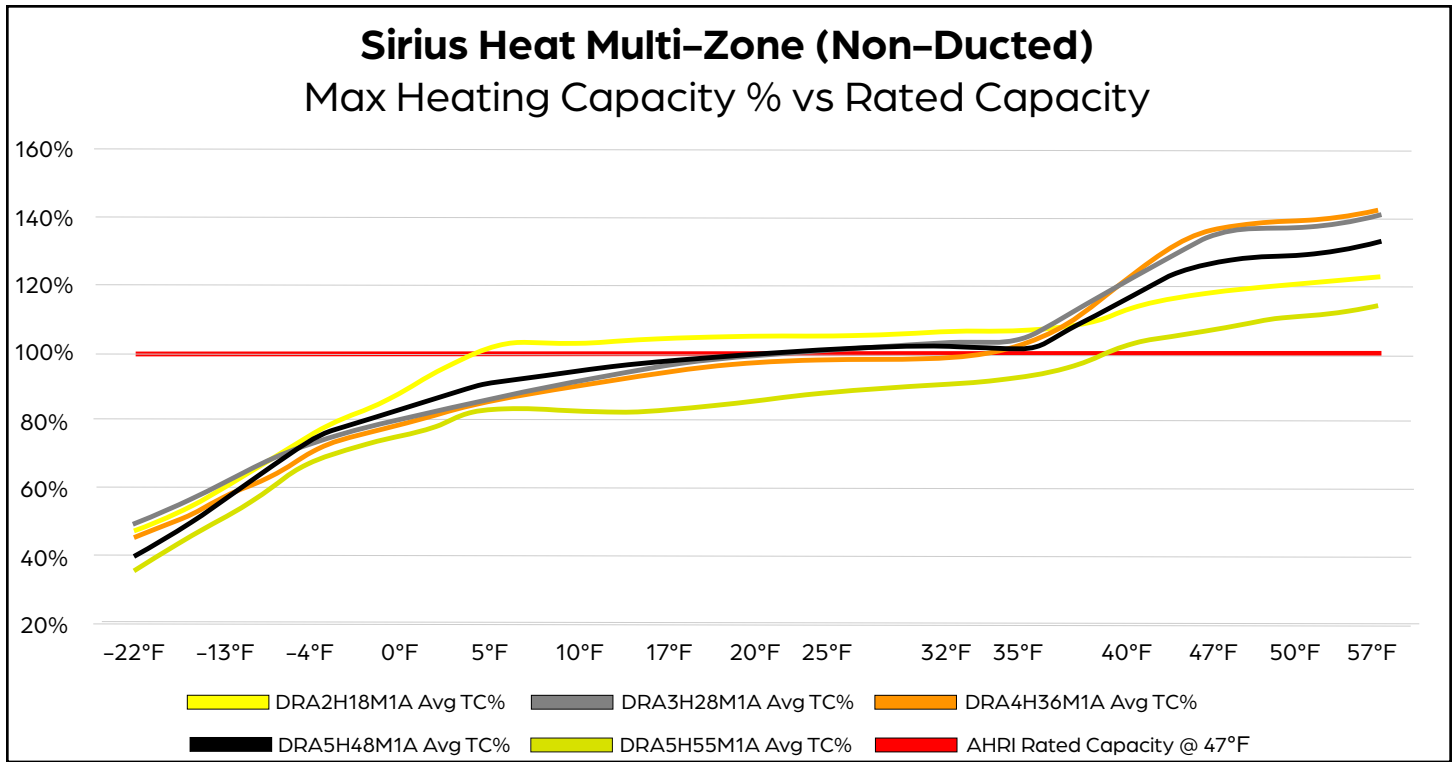

Sirius Heat Non-Ducted Heating Performance Data*

Heating			OutDoor Temperature														
Unit	Indoor		-22°F	-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-30°C	-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA2H18M1A + Non-Ducted	60°F (15.6°C)	TC	9.44	11.93	15.24	17.56	20.09	20.32	20.91	20.77	20.89	21.05	21.19	22.24	23.39	23.80	24.39
		Input	1.95	2.23	2.48	2.62	2.82	2.62	2.43	2.40	2.34	2.29	2.23	1.97	1.77	1.70	1.68
	65°F (18.3°C)	TC	9.16	11.59	14.73	17.05	19.48	19.71	20.20	20.24	20.30	20.48	20.53	21.60	22.60	23.04	23.59
		Input	2.00	2.29	2.56	2.70	2.88	2.70	2.50	2.45	2.40	2.34	2.30	2.01	1.81	1.75	1.71
	70°F (21.1°C)	TC	8.88	11.20	14.30	16.52	18.93	19.21	19.54	19.63	19.73	19.82	19.92	20.89	21.87	22.37	22.97
		Input	2.06	2.34	2.62	2.77	2.94	2.76	2.57	2.51	2.46	2.41	2.37	2.07	1.85	1.79	1.76
	75°F (23.9°C)	TC	8.54	10.77	13.66	15.80	18.12	18.44	18.78	18.89	18.96	19.11	19.06	20.03	21.04	21.37	21.93
		Input	2.11	2.41	2.71	2.85	3.02	2.83	2.64	2.58	2.54	2.48	2.44	2.14	1.92	1.84	1.81

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Sirius Heat Non-Ducted Heating Performance Data* cont.

Heating			OutDoor Temperature														
Unit	Indoor		-22°F	-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-30°C	-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA3H28M1A + Non-Ducted	60°F (15.6°C)	TC	14.17	17.57	21.68	23.33	24.82	26.66	28.09	28.89	29.55	30.22	30.44	34.40	39.32	40.05	41.20
		Input	3.03	3.32	3.55	3.68	3.71	3.59	3.49	3.41	3.34	3.27	3.26	3.43	3.60	3.51	3.41
	65°F (18.3°C)	TC	13.76	16.98	21.03	22.56	24.14	25.86	27.40	28.05	28.74	29.28	29.70	33.50	38.06	39.03	40.08
		Input	3.12	3.39	3.66	3.76	3.82	3.68	3.57	3.49	3.44	3.37	3.34	3.52	3.70	3.61	3.52
	70°F FF (21.1°C)	TC	13.35	16.50	20.40	21.95	23.44	25.13	26.66	27.21	27.77	28.32	28.86	32.61	37.02	38.04	38.87
		Input	3.19	3.45	3.74	3.84	3.93	3.77	3.66	3.59	3.53	3.48	3.43	3.59	3.79	3.69	3.60
	75°F FF (23.9°C)	TC	12.84	15.87	19.48	21.18	22.41	24.22	25.54	26.23	26.66	27.05	27.56	31.47	35.58	36.33	37.16
		Input	3.30	3.56	3.86	3.96	4.06	3.90	3.75	3.69	3.65	3.56	3.55	3.72	3.89	3.80	3.69
DRA4H36M1A + Non-Ducted	60°F (15.6°C)	TC	17.89	22.15	27.26	30.56	32.83	34.82	36.61	37.46	38.25	39.06	39.41	45.40	52.20	53.57	54.76
		Input	4.52	4.84	5.10	5.16	5.18	5.11	5.11	4.86	4.70	4.53	4.36	4.48	4.55	4.44	4.32
	65°F (18.3°C)	TC	17.31	21.44	26.60	29.56	31.93	33.88	35.57	36.44	37.21	37.74	38.26	44.29	50.83	51.91	53.06
		Input	4.66	4.97	5.24	5.28	5.31	5.26	5.25	5.00	4.83	4.64	4.46	4.60	4.69	4.57	4.44
	70°F FF (21.1°C)	TC	16.77	20.80	25.80	28.58	31.15	33.02	34.60	35.31	35.99	36.64	37.33	43.17	49.25	50.59	51.71
		Input	4.78	5.08	5.40	5.40	5.44	5.40	5.36	5.14	4.93	4.73	4.58	4.72	4.80	4.70	4.56
	75°F FF (23.9°C)	TC	16.03	20.03	24.90	27.38	30.00	31.70	33.32	33.87	34.37	35.25	36.02	41.23	47.09	48.72	49.44
		Input	4.90	5.21	5.58	5.56	5.57	5.55	5.54	5.28	5.09	4.88	4.70	4.86	4.93	4.86	4.67
DRA5H48M1A + Non-Ducted	60°F (15.6°C)	TC	20.64	29.72	39.21	43.24	47.69	49.68	50.85	51.46	51.97	52.99	52.89	59.93	65.72	67.06	68.94
		Input	4.19	5.53	6.66	6.51	6.26	6.20	6.12	5.95	5.81	5.69	5.55	5.48	5.41	5.26	5.15
	65°F (18.3°C)	TC	20.14	28.75	38.26	42.19	46.44	48.05	49.37	50.20	50.46	51.19	51.35	58.36	64.00	65.23	67.00
		Input	4.29	5.67	6.86	6.64	6.41	6.36	6.28	6.09	5.98	5.83	5.71	5.65	5.53	5.42	5.25
	70°F FF (21.1°C)	TC	19.50	27.80	37.00	41.16	45.00	46.51	48.12	48.60	49.03	49.51	49.95	56.49	61.95	63.52	65.05
		Input	4.37	5.82	7.00	6.80	6.59	6.52	6.43	6.27	6.13	5.99	5.88	5.82	5.68	5.56	5.40
	75°F FF (23.9°C)	TC	18.82	26.77	35.37	39.60	43.25	44.42	46.43	46.51	46.93	47.53	47.90	54.23	59.54	60.85	62.77
		Input	4.53	5.99	7.21	7.03	6.82	6.69	6.62	6.47	6.33	6.14	6.08	6.02	5.88	5.70	5.53
DRA5H55M1A + Non-Ducted	60°F (15.6°C)	TC	20.75	29.56	39.94	44.20	48.18	47.73	47.41	49.21	51.15	52.40	53.59	58.05	61.76	63.57	65.42
		Input	4.41	5.54	6.28	6.67	7.01	6.47	6.01	6.06	6.04	6.01	6.03	5.48	4.99	4.88	4.74
	65°F (18.3°C)	TC	20.07	28.70	38.74	42.79	47.00	46.52	46.25	47.78	49.47	50.93	52.28	56.30	59.79	61.84	63.39
		Input	4.54	5.69	6.47	6.87	7.20	6.65	6.18	6.23	6.20	6.15	6.20	5.65	5.13	5.01	4.88
	70°F FF (21.1°C)	TC	19.51	28.00	37.50	41.34	45.50	45.30	45.08	46.48	47.93	49.35	50.91	54.77	58.33	59.80	61.25
		Input	4.65	5.86	6.66	7.02	7.41	6.81	6.37	6.36	6.35	6.34	6.33	5.81	5.27	5.16	5.01
	75°F FF (23.9°C)	TC	18.75	26.80	35.81	39.69	43.63	43.67	43.46	44.71	46.11	47.13	48.72	52.47	55.76	57.29	58.49
		Input	4.79	6.03	6.87	7.20	7.59	6.99	6.56	6.56	6.52	6.54	6.53	5.97	5.44	5.32	5.18

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb


WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Heating Performance Curves

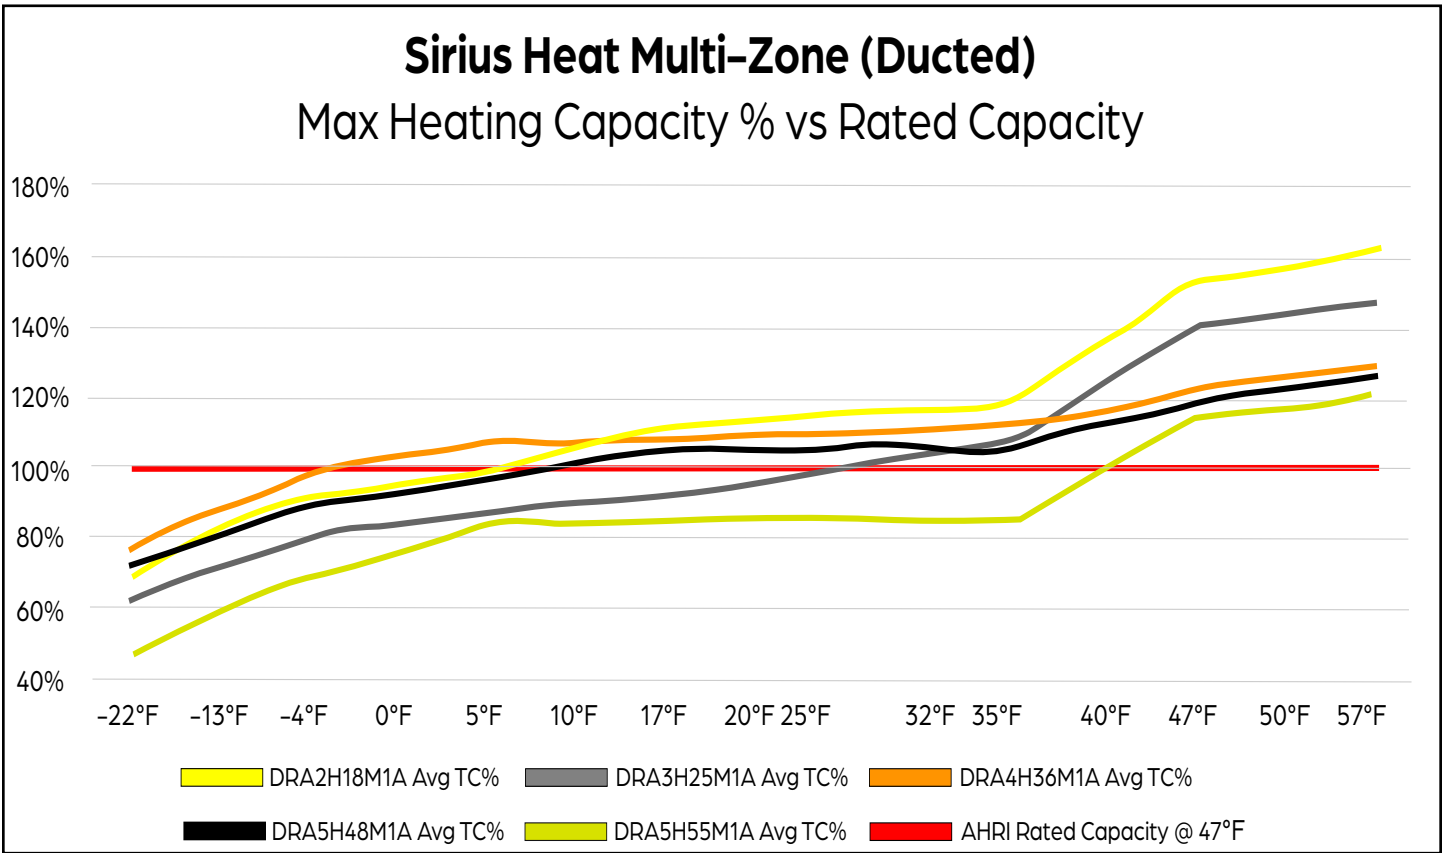

Sirius Heat Ducted Heating Performance Data*

Heating			OutDoor Temperature														
Unit	Indoor		-22°F	-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-30°C	-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA2H18M1A + Ducted	60°F (15.6°C)	TC	13.78	16.17	18.03	19.01	19.64	20.91	22.12	22.65	23.06	23.64	23.87	27.41	30.38	31.04	32.05
		Input	2.97	3.01	2.87	2.78	2.73	2.66	2.59	2.49	2.42	2.34	2.29	2.53	2.70	2.63	2.55
	65°F (18.3°C)	TC	13.37	15.77	17.58	18.36	19.07	20.23	21.45	21.88	22.35	22.84	23.15	26.61	29.41	30.17	30.97
		Input	3.04	3.09	2.93	2.85	2.79	2.74	2.66	2.55	2.48	2.41	2.34	2.61	2.77	2.69	2.61
	70°F (21.1°C)	TC	12.99	15.28	16.98	17.74	18.46	19.68	20.87	21.29	21.70	22.13	22.52	25.88	28.69	29.40	30.13
		Input	3.10	3.16	3.01	2.93	2.87	2.81	2.71	2.62	2.55	2.47	2.40	2.66	2.83	2.76	2.69
	75°F (23.9°C)	TC	12.54	14.75	16.37	16.94	17.70	18.99	20.07	20.39	20.83	21.33	21.64	24.87	27.69	28.37	28.89
		Input	3.21	3.27	3.10	3.02	2.95	2.89	2.80	2.71	2.63	2.56	2.48	2.75	2.92	2.85	2.77

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Sirius Heat Ducted Heating Performance Data* cont.

Heating			OutDoor Temperature														
Unit	Indoor		-22°F	-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-30°C	-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA3H28M1A + Ducted	60°F (15.6°C)	TC	18.18	20.94	23.38	24.30	25.46	26.06	26.73	27.90	29.11	30.43	31.98	36.52	41.04	41.79	42.39
		Input	4.10	4.11	3.92	3.81	3.72	3.54	3.33	3.36	3.38	3.39	3.38	3.74	3.91	3.82	3.73
	65°F (18.3°C)	TC	17.58	20.43	22.74	23.61	24.81	25.42	25.88	27.04	28.40	29.69	30.90	35.59	39.69	40.42	41.32
		Input	4.20	4.20	4.02	3.89	3.82	3.64	3.43	3.43	3.47	3.47	3.48	3.84	4.01	3.91	3.82
	70°F (21.1°C)	TC	17.09	19.87	22.08	22.97	24.00	24.56	25.17	26.35	27.57	28.74	29.94	34.59	38.39	39.43	40.31
		Input	4.32	4.31	4.10	3.99	3.91	3.72	3.53	3.54	3.55	3.54	3.55	3.92	4.12	4.03	3.91
	75°F (23.9°C)	TC	16.47	19.17	21.24	22.14	22.94	23.68	24.22	25.41	26.55	27.53	28.60	33.27	36.97	37.98	38.86
		Input	4.44	4.44	4.23	4.10	4.03	3.83	3.63	3.63	3.65	3.65	3.67	4.03	4.26	4.16	4.03
DRA4H36M1A + Ducted	60°F (15.6°C)	TC	29.40	34.45	38.02	39.99	41.69	41.78	42.23	42.41	42.34	42.87	43.55	45.14	46.72	48.17	49.25
		Input	6.10	6.16	5.89	5.73	5.62	5.07	4.80	4.62	4.44	4.31	4.19	4.16	4.18	4.06	3.95
	65°F (18.3°C)	TC	28.54	33.35	37.06	38.68	40.32	40.52	40.80	41.17	41.31	41.75	42.12	43.87	45.54	46.95	47.96
		Input	6.29	6.32	6.01	5.85	5.74	5.22	4.90	4.74	4.55	4.44	4.28	4.29	4.30	4.17	4.07
	70°F (21.1°C)	TC	27.77	32.29	35.87	37.59	38.99	39.31	39.65	39.93	40.23	40.49	40.78	42.47	44.34	45.41	46.56
		Input	6.48	6.46	6.15	6.02	5.86	5.37	5.02	4.84	4.68	4.53	4.39	4.39	4.41	4.29	4.19
	75°F (23.9°C)	TC	26.54	30.96	34.29	36.16	37.28	37.65	38.10	38.49	38.62	39.03	39.06	40.77	42.44	43.50	44.79
		Input	6.65	6.67	6.34	6.20	6.03	5.51	5.18	5.01	4.81	4.66	4.51	4.54	4.55	4.43	4.30
DRA5H48M1A + Ducted	60°F (15.6°C)	TC	36.90	42.54	46.90	48.65	51.13	52.68	54.67	54.93	54.88	55.55	56.38	59.20	62.38	64.47	65.94
		Input	7.57	7.43	7.12	6.94	6.83	6.55	6.25	6.07	6.00	5.92	5.76	5.96	6.11	5.84	5.75
	65°F (18.3°C)	TC	35.65	41.22	45.67	47.28	49.78	51.39	52.87	53.13	53.54	53.99	54.68	57.64	60.86	62.59	63.96
		Input	7.73	7.65	7.31	7.11	7.01	6.72	6.38	6.25	6.15	6.06	5.90	6.09	6.24	6.01	5.92
	70°F (21.1°C)	TC	34.65	39.83	44.25	46.04	48.10	49.75	51.13	51.58	51.98	52.41	52.83	56.02	59.14	60.59	62.10
		Input	7.92	7.89	7.52	7.31	7.16	6.89	6.57	6.44	6.31	6.19	6.07	6.24	6.38	6.18	6.06
	75°F (23.9°C)	TC	33.37	38.11	42.57	44.34	46.42	47.91	49.09	49.57	49.80	50.53	50.88	53.72	56.95	58.17	59.43
		Input	8.16	8.11	7.73	7.55	7.40	7.09	6.74	6.63	6.51	6.35	6.26	6.40	6.56	6.37	6.23
DRA5H55M1A + Ducted	60°F (15.6°C)	TC	26.79	33.60	39.88	43.78	47.76	48.30	48.23	49.27	49.44	49.30	49.17	57.91	65.73	67.16	69.21
		Input	4.58	5.37	5.93	5.91	5.96	5.80	5.71	5.64	5.64	5.58	5.61	5.41	5.22	5.10	4.95
	65°F (18.3°C)	TC	26.03	32.78	38.53	42.38	46.46	46.84	47.05	47.60	47.87	47.96	47.88	56.45	63.75	65.01	66.87
		Input	4.68	5.53	6.09	6.03	6.11	5.94	5.84	5.79	5.78	5.71	5.72	5.55	5.35	5.21	5.09
	70°F (21.1°C)	TC	25.30	31.76	37.52	41.26	45.24	45.57	45.86	46.08	46.29	46.51	46.71	54.91	61.89	63.43	64.99
		Input	4.82	5.68	6.24	6.18	6.24	6.10	5.97	5.93	5.90	5.87	5.84	5.71	5.51	5.34	5.24
	75°F (23.9°C)	TC	24.24	30.36	36.09	39.53	43.29	43.52	44.16	44.05	44.21	44.61	44.93	52.49	59.11	60.76	62.71
		Input	4.98	5.86	6.43	6.39	6.39	6.30	6.15	6.14	6.09	6.05	6.02	5.85	5.69	5.48	5.42

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb


WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Heating Performance Curves

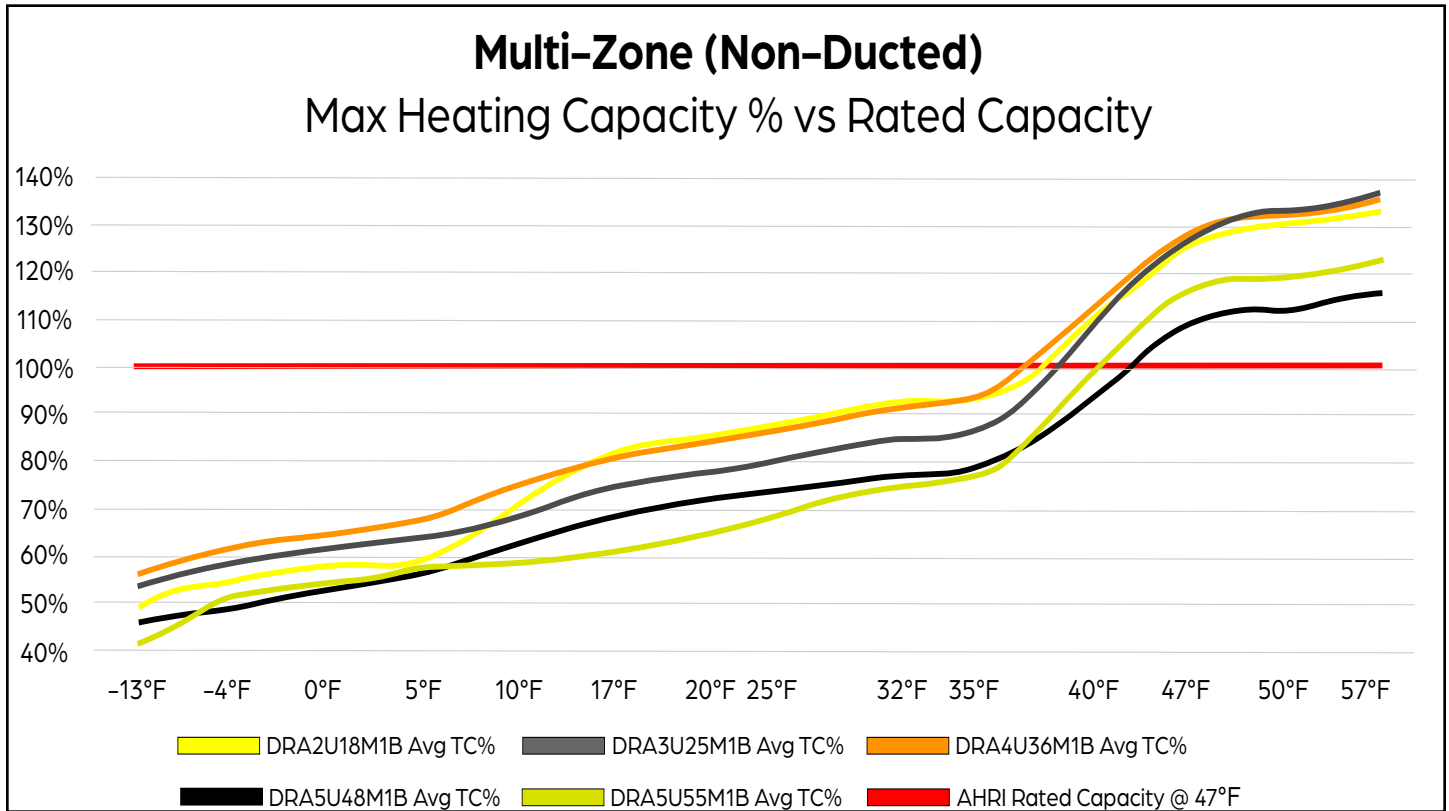

Non-Ducted Heating Performance Data*

Heating			OutDoor Temperature													
Unit	Indoor Temperature		-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA2U18M1B + Non-Ducted	60°F (15.6°C)	TC	9.94	11.04	11.52	11.89	14.46	16.34	16.98	17.60	18.36	18.80	21.69	25.06	25.70	26.37
		Input	1.87	1.79	1.74	1.70	1.78	1.81	1.76	1.72	1.67	1.64	1.77	1.88	1.81	1.77
	65°F (18.3°C)	TC	9.65	10.73	11.17	11.56	13.97	15.94	16.43	17.07	17.76	18.28	21.14	24.36	25.00	25.62
		Input	1.91	1.83	1.78	1.75	1.82	1.86	1.81	1.76	1.71	1.67	1.81	1.92	1.85	1.81
	70°F (21.1°C)	TC	9.34	10.37	10.86	11.28	13.54	15.43	16.01	16.62	17.19	17.82	20.62	23.60	24.16	24.78
		Input	1.97	1.87	1.82	1.78	1.86	1.92	1.85	1.80	1.75	1.72	1.85	1.96	1.90	1.86
	75°F (23.9°C)	TC	8.99	9.92	10.46	10.77	12.94	14.87	15.40	15.99	16.52	17.05	19.72	22.66	23.12	23.69
		Input	2.02	1.93	1.88	1.84	1.92	1.98	1.91	1.85	1.80	1.77	1.90	2.02	1.95	1.92

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Non-Ducted Heating Performance Data* cont.

Heating			OutDoor Temperature													
Unit	Indoor		-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA3U28M1B + Non-Ducted	60°F (15.6°C)	TC	15.59	17.13	18.08	18.76	20.42	22.05	22.71	23.85	24.80	25.92	31.76	37.56	38.16	39.44
		Input	2.83	2.69	2.61	2.56	2.55	2.59	2.54	2.48	2.44	2.38	2.73	3.01	2.97	2.87
	65°F (18.3°C)	TC	15.14	16.71	17.49	18.13	19.73	21.37	22.14	23.20	24.20	25.19	30.98	36.40	37.05	38.26
		Input	2.90	2.76	2.67	2.62	2.62	2.65	2.60	2.54	2.50	2.44	2.81	3.08	3.04	2.93
	70°F FF (21.1°C)	TC	14.64	16.27	16.93	17.68	19.12	20.64	21.60	22.52	23.49	24.38	30.08	35.24	36.11	37.00
		Input	2.96	2.82	2.73	2.69	2.69	2.73	2.66	2.61	2.57	2.50	2.86	3.17	3.10	3.01
	75°F FF (23.9°C)	TC	14.04	15.68	16.32	17.03	18.28	19.78	20.62	21.55	22.44	23.43	28.73	33.69	34.84	35.70
		Input	3.06	2.91	2.82	2.76	2.76	2.82	2.76	2.69	2.64	2.56	2.94	3.27	3.21	3.09
DRA4U36M1B + Non-Ducted	60°F (15.6°C)	TC	21.81	23.91	25.17	26.40	29.18	31.41	32.87	33.96	35.90	36.92	43.37	49.54	50.73	52.37
		Input	4.28	4.08	3.95	3.89	3.89	3.78	3.67	3.61	3.45	3.37	3.85	4.23	4.15	4.01
	65°F (18.3°C)	TC	21.08	23.28	24.41	25.50	28.22	30.62	31.85	33.10	34.69	35.85	41.94	47.86	49.20	50.75
		Input	4.37	4.20	4.06	3.98	3.97	3.89	3.77	3.69	3.56	3.47	3.94	4.34	4.26	4.13
	70°F FF (21.1°C)	TC	20.42	22.69	23.61	24.67	27.32	29.81	31.07	32.29	33.52	34.70	40.88	46.70	47.96	49.03
		Input	4.50	4.28	4.16	4.08	4.07	4.01	3.88	3.77	3.66	3.58	4.06	4.47	4.36	4.24
	75°F FF (23.9°C)	TC	19.59	21.88	22.74	23.65	26.11	28.50	29.92	31.07	32.34	33.21	39.37	45.06	46.28	47.27
		Input	4.62	4.42	4.28	4.21	4.21	4.14	4.01	3.89	3.76	3.69	4.16	4.62	4.49	4.36
DRA5U48M1B + Non-Ducted	60°F (15.6°C)	TC	23.06	24.88	27.09	28.63	31.55	34.63	36.20	37.63	38.87	40.54	47.30	55.09	56.35	57.51
		Input	5.08	4.87	4.77	4.64	4.61	4.62	4.42	4.22	4.01	3.90	4.26	4.62	4.47	4.40
	65°F (18.3°C)	TC	22.28	24.06	26.20	27.88	30.72	33.72	35.28	36.46	37.81	39.28	46.10	53.38	54.65	55.94
		Input	5.22	4.98	4.89	4.74	4.71	4.73	4.52	4.34	4.14	4.02	4.39	4.72	4.61	4.49
	70°F FF (21.1°C)	TC	21.61	23.45	25.41	27.04	29.68	32.90	34.12	35.33	36.60	37.99	44.59	51.88	53.11	54.47
		Input	5.37	5.11	5.01	4.87	4.83	4.85	4.61	4.43	4.26	4.14	4.48	4.84	4.72	4.60
	75°F FF (23.9°C)	TC	20.74	22.49	24.39	26.07	28.52	31.58	32.93	33.74	35.29	36.36	42.63	49.75	50.83	52.13
		Input	5.56	5.27	5.14	5.04	4.97	5.00	4.75	4.54	4.40	4.28	4.62	4.96	4.86	4.75
DRA5U55M1B + Non-Ducted	60°F (15.6°C)	TC	23.56	29.80	31.14	33.01	33.99	35.63	37.70	40.70	43.31	45.87	57.18	66.62	68.75	70.50
		Input	5.45	5.10	4.96	4.86	4.76	4.65	4.59	4.54	4.53	4.43	5.00	5.41	5.22	5.14
	65°F (18.3°C)	TC	22.99	28.82	30.27	32.14	32.97	34.43	36.75	39.55	42.00	44.36	55.25	64.87	66.95	68.12
		Input	5.57	5.25	5.09	4.99	4.88	4.77	4.73	4.67	4.64	4.53	5.13	5.52	5.36	5.24
	70°F FF (21.1°C)	TC	22.38	27.98	29.47	31.09	32.13	33.26	35.78	38.32	40.74	43.23	53.80	63.17	64.68	66.32
		Input	5.70	5.38	5.24	5.12	5.02	4.90	4.85	4.80	4.74	4.66	5.29	5.64	5.49	5.36
	75°F FF (23.9°C)	TC	21.46	26.83	28.38	29.78	30.88	31.77	34.53	36.91	39.11	41.72	51.91	60.58	62.35	63.80
		Input	5.88	5.54	5.39	5.26	5.19	5.02	4.97	4.92	4.88	4.80	5.46	5.82	5.65	5.50

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb


WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

Input --- Total Power (kW)



Multi-Zone Heating Performance Curves

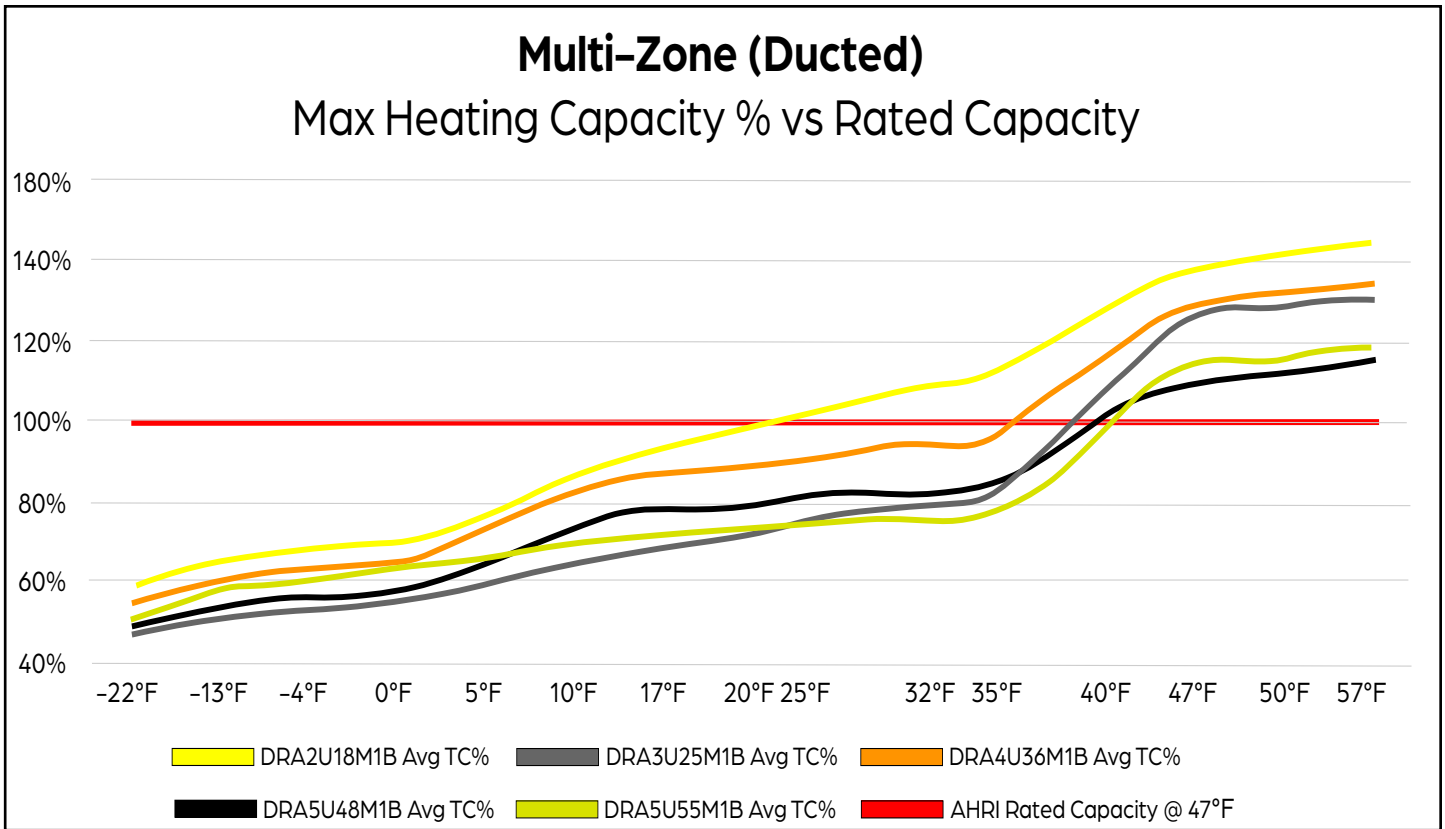

Ducted Heating Performance Data*

Heating			OutDoor Temperature													
Unit	Indoor		-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA2U18M1B + Ducted	60°F (15.6°C)	TC	11.58	12.99	13.62	14.21	15.87	17.77	19.18	20.12	21.39	22.33	24.98	27.26	28.09	28.71
		Input	2.01	1.93	1.86	1.81	1.81	1.78	1.76	1.77	1.77	1.78	1.86	1.98	1.94	1.90
	65°F (18.3°C)	TC	11.29	12.57	13.16	13.74	15.40	17.34	18.53	19.61	20.72	21.79	24.25	26.49	27.22	27.82
		Input	2.07	1.97	1.90	1.86	1.84	1.85	1.81	1.82	1.81	1.82	1.92	2.03	1.99	1.94
	70°F (21.1°C)	TC	11.01	12.24	12.73	13.30	14.93	16.85	17.92	19.05	20.16	21.17	23.43	25.82	26.50	27.11
		Input	2.12	2.01	1.95	1.92	1.90	1.87	1.87	1.87	1.86	1.86	1.97	2.09	2.03	1.99
	75°F (23.9°C)	TC	10.62	11.75	12.22	12.71	14.29	16.23	17.29	18.25	19.39	20.22	22.42	24.87	25.39	25.89
		Input	2.18	2.08	2.01	1.97	1.96	1.92	1.93	1.93	1.92	1.91	2.03	2.15	2.08	2.05

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.



Ducted Heating Performance Data* cont.

Heating			OutDoor Temperature													
Unit	Indoor		-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F	57°F
			-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	40.5°C	8.3°C	10°C	13.9°C
DRA3U28M1B + Ducted	60°F (15.6°C)	TC	13.65	15.13	15.73	16.47	18.11	19.55	20.84	21.95	23.08	24.21	30.15	36.68	37.72	38.26
		Input	2.93	2.77	2.71	2.65	2.60	2.51	2.58	2.65	2.67	2.74	2.80	2.95	2.90	2.80
	65°F (18.3°C)	TC	13.26	14.69	15.27	15.96	17.60	18.98	20.23	21.37	22.41	23.57	29.24	35.51	36.62	37.32
		Input	3.00	2.86	2.80	2.73	2.68	2.57	2.65	2.71	2.75	2.80	2.88	3.03	2.96	2.89
	70°F (21.1°C)	TC	12.83	14.26	14.84	15.50	17.02	18.51	19.64	20.73	21.80	22.86	28.31	34.58	35.48	36.31
		Input	3.09	2.94	2.86	2.80	2.75	2.64	2.70	2.76	2.81	2.86	2.95	3.12	3.04	2.96
	75°F (23.9°C)	TC	12.32	13.62	14.23	14.85	16.31	17.87	18.78	19.86	20.81	21.85	27.32	33.37	33.89	34.74
		Input	3.17	3.03	2.95	2.87	2.83	2.72	2.77	2.84	2.91	2.95	3.04	3.22	3.14	3.06
DRA4U36M1B + Ducted	60°F (15.6°C)	TC	21.28	23.33	24.86	25.53	29.49	33.20	33.94	35.29	36.28	37.29	43.50	49.51	51.26	52.04
		Input	4.39	4.17	4.11	4.01	4.03	3.93	3.84	3.69	3.62	3.54	3.83	4.08	4.00	3.92
	65°F (18.3°C)	TC	20.58	22.74	24.02	24.91	28.57	32.11	33.05	34.09	35.19	36.24	42.44	48.21	49.52	50.33
		Input	4.50	4.30	4.19	4.09	4.12	4.03	3.93	3.80	3.73	3.62	3.95	4.18	4.10	4.01
	70°F (21.1°C)	TC	19.97	22.18	23.21	24.11	27.77	31.14	32.15	33.17	34.16	35.25	41.17	46.62	47.85	48.96
		Input	4.64	4.42	4.32	4.21	4.24	4.15	4.02	3.92	3.81	3.70	4.05	4.31	4.21	4.09
	75°F (23.9°C)	TC	19.07	21.27	22.16	23.27	26.71	29.86	30.99	31.71	32.93	33.84	39.56	44.71	46.08	47.10
		Input	4.77	4.55	4.46	4.32	4.36	4.27	4.16	4.03	3.90	3.80	4.17	4.44	4.35	4.21
DRA5U48M1B + Ducted	60°F (15.6°C)	TC	25.73	28.61	29.52	30.92	35.59	40.08	41.24	41.93	42.80	43.94	51.55	57.13	58.61	60.39
		Input	5.31	5.00	4.88	4.81	4.74	4.74	4.62	4.56	4.50	4.36	4.63	4.75	4.65	4.50
	65°F (18.3°C)	TC	24.88	27.67	28.80	30.08	34.49	39.10	39.93	40.83	41.60	42.74	49.90	55.68	57.13	58.63
		Input	5.45	5.16	5.02	4.92	4.85	4.86	4.73	4.65	4.59	4.47	4.74	4.87	4.75	4.59
	70°F (21.1°C)	TC	24.27	26.97	28.10	29.32	33.35	37.82	38.76	39.68	40.58	41.45	48.26	54.06	55.52	56.76
		Input	5.56	5.30	5.16	5.05	4.98	4.98	4.88	4.79	4.70	4.60	4.87	4.97	4.88	4.73
	75°F (23.9°C)	TC	23.25	25.87	27.06	28.11	32.19	36.46	37.37	38.25	39.04	40.00	46.33	51.79	53.02	54.49
		Input	5.71	5.46	5.31	5.17	5.12	5.12	5.01	4.92	4.83	4.76	5.02	5.12	5.00	4.86
DRA5U55M1B + Non-Ducted	60°F (15.6°C)	TC	28.79	33.61	35.20	36.50	38.61	40.60	41.53	42.96	43.98	45.11	54.65	65.31	67.13	68.91
		Input	5.77	5.39	5.31	5.19	4.99	4.81	4.69	4.58	4.47	4.40	4.78	5.31	5.15	5.02
	65°F (18.3°C)	TC	27.82	32.79	34.14	35.54	37.45	39.26	40.44	41.55	42.74	43.71	52.90	63.72	65.04	66.78
		Input	5.93	5.55	5.46	5.31	5.10	4.92	4.81	4.70	4.61	4.52	4.91	5.44	5.28	5.16
	70°F (21.1°C)	TC	27.11	31.90	33.15	34.67	36.53	38.12	39.19	40.34	41.50	42.56	51.26	61.68	63.33	64.77
		Input	6.05	5.71	5.57	5.44	5.25	5.03	4.91	4.81	4.72	4.61	5.02	5.56	5.42	5.28
	75°F (23.9°C)	TC	26.14	30.62	31.69	33.32	35.07	36.71	37.66	38.57	39.88	40.78	48.96	59.53	60.74	61.92
		Input	6.22	5.89	5.73	5.62	5.41	5.19	5.09	4.98	4.84	4.73	5.18	5.76	5.60	5.44

* Estimated performance only. Specific performance may vary based on the installation and ambient environment.

DB --- Dry Bulb

WB --- Wet Bulb

TC --- Total Net Capacity (1000 Btu/hour)

Input --- Total Power (kW)