



SIRIUS HEAT™

18,000 BTU/H SIRIUS HEAT ONE-WAY CASSETTE SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____




ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

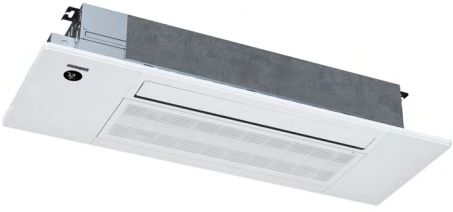SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAL18F1A	Outdoor Unit (ODU): DRA1H18S1A	Wireless Remote Control
		

PRODUCT FEATURES

- Up to 100% heating capacity at 0°F
- Low ambient heating down to -22°F
- Low ambient cooling down to 5°F
- Wireless Remote Control with "Follow Me" Technology
- Variable Speed Inverter Compressor
- Auto Restart
- Sleep Mode
- Turbo Mode
- Quiet operation
- 46°F Freeze Protection
- Included base pan heater
- Humidity sensor
- Refrigerant leak detection
- Anti-corrosive fin coating
- Grille included

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95 °F ¹	16700
	Minimum	6100
	Maximum	17500
Heating Capacity (BTU/hr)	Rated at 47°F ²	20000
	Maximum at 5°F ³	21500
	Minimum	6450
	Maximum	21500

SYSTEM DATA	
Refrigerant Type	R-410A
Refrigerant Charge (oz.)	65.2
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

EFFICIENCY DATA	
SEER2	19.8
EER2	12.5
HSPF2	11.2
SEER	19.8
EER	12.5
HSPF	11.8
COP at 47°F	2.8
COP at 5°F	1.9



Specifications are subject to change without notice.

© 2023 Ferguson Enterprises LLC

www.durastar.com



18,000 BTU/H SIRIUS HEAT ONE-WAY CASSETTE SYSTEM

SPECIFICATIONS

SIRIUS HEAT™

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid	Ø1/4" (Ø6.35mm)
Gas	Ø1/2" (Ø12.7mm)
Pre-Charge Length	25'
Minimum Length	10'
Maximum Length	98'
Maximum Height Differential	66'
Additional Refrigerant (oz./ft)	0.16

OUTDOOR UNIT		
Unit Dimensions	Width	35-1/16"
	Depth	13-7/16"
	Height	26-1/2"
Carton Dimensions	Width	39-3/16"
	Depth	15-11/16"
	Height	32-11/16"
Net Weight	101 lbs.	
Gross Weight	108 lbs.	
Cooling Operating Temperature	5°F - 122°F	
Heating Operating Temperature	-22°F - 75°F	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	25	
Minimum Circuit Ampacity (Amps)	16	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	8.3	
Rated Current - Heating (Amps) ²	12.3	
Sound Pressure (dB(A))	59	


INDOOR UNIT		
Unit Dimensions	Width	50-5/16"
	Depth	13-13/16"
	Height	9"
Carton Dimensions	Width	57-5/8"
	Depth	22-1/2"
	Height	22-1/2"
Net Weight	60.7 lbs.	
Gross Weight	82.9 lbs.	
Indoor Unit Air Flow (CFM)	Low	207
	Medium	300
	High	352
Drain Port O.D.	1"	
Drain Pump Lift	20.8"	
Recommended Breaker (Amps)	25	
Sound Pressure (dB(A))	Low	35.0
	Medium	40.5
	High	44.0

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz.)	21 oz. (620ml)

¹ AHRI Rated at 95°F (AFull).

² AHRI Rated at 47°F (H1Full).

³ AHRI Rated Capacity at 5°F (H42)

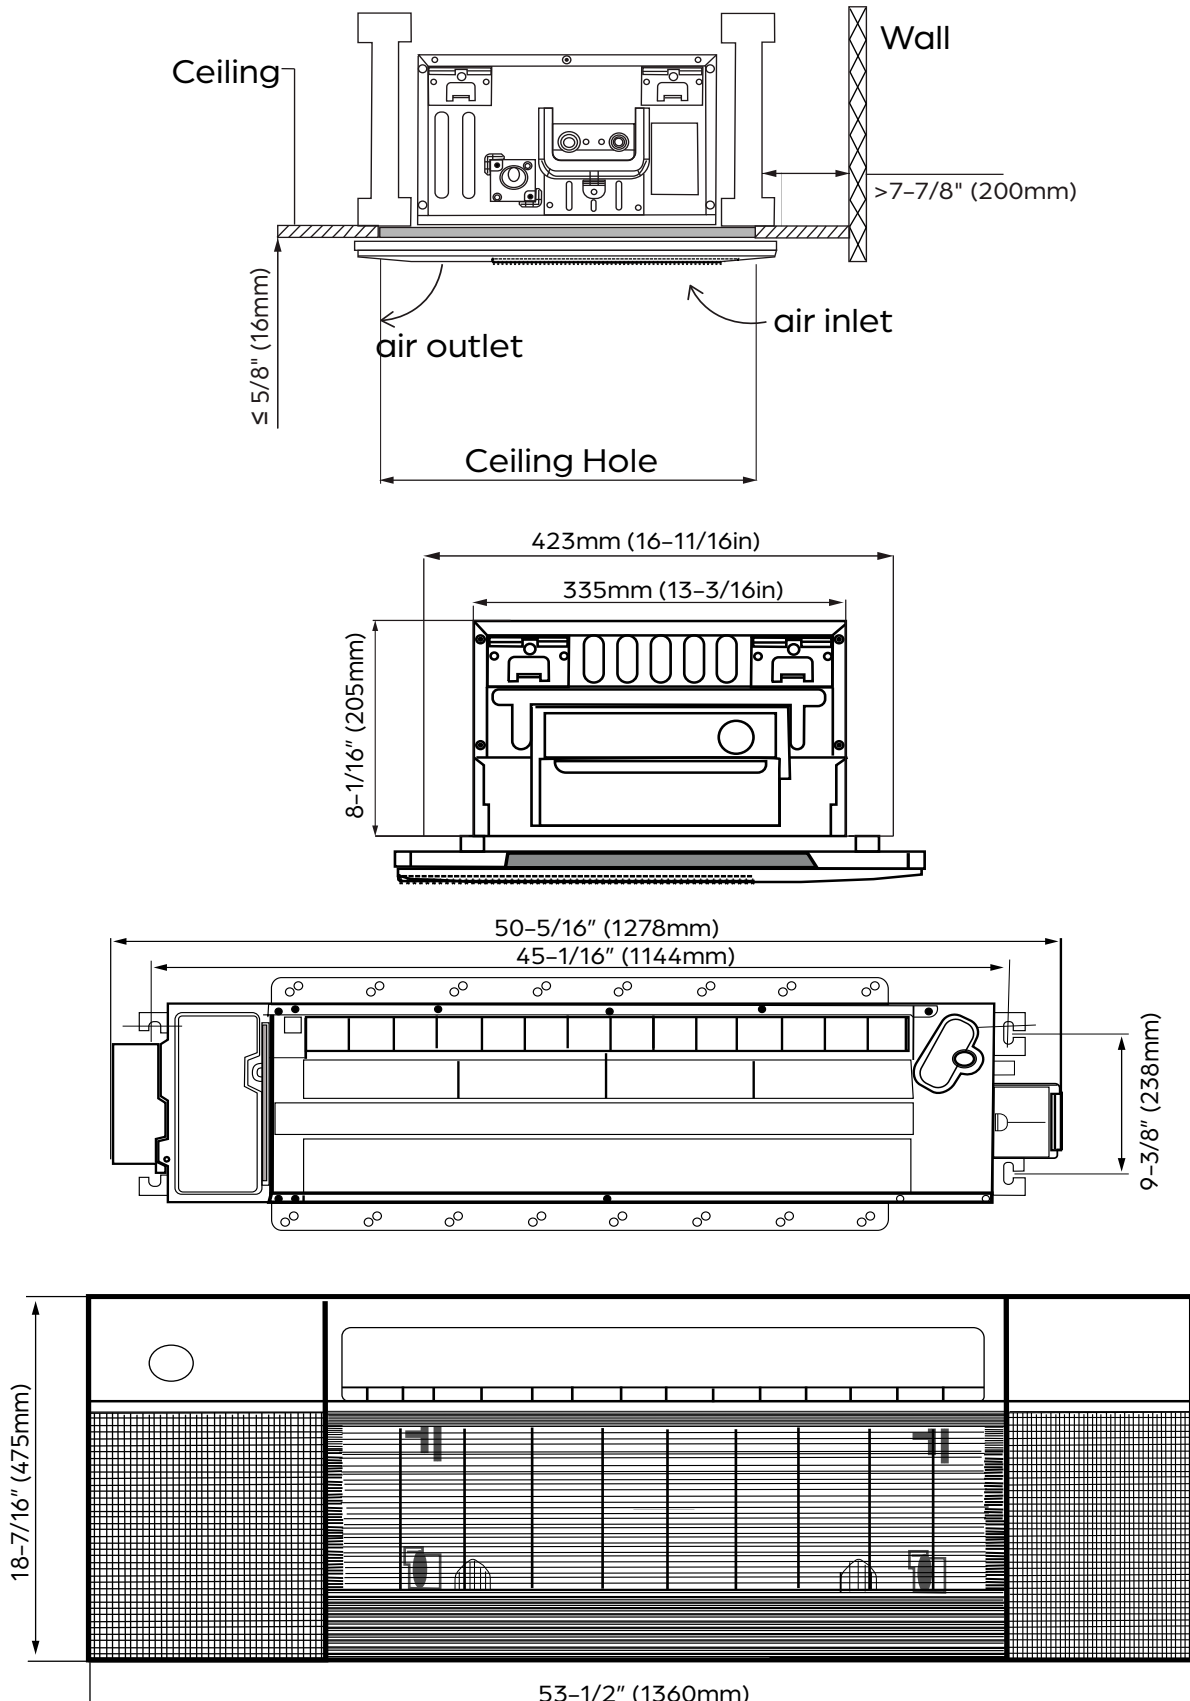




SIRIUS HEAT™


18,000 BTU/H SIRIUS HEAT ONE-WAY CASSETTE SYSTEM

ODU DIMENSIONS - DRA1H18S1A

Clearances

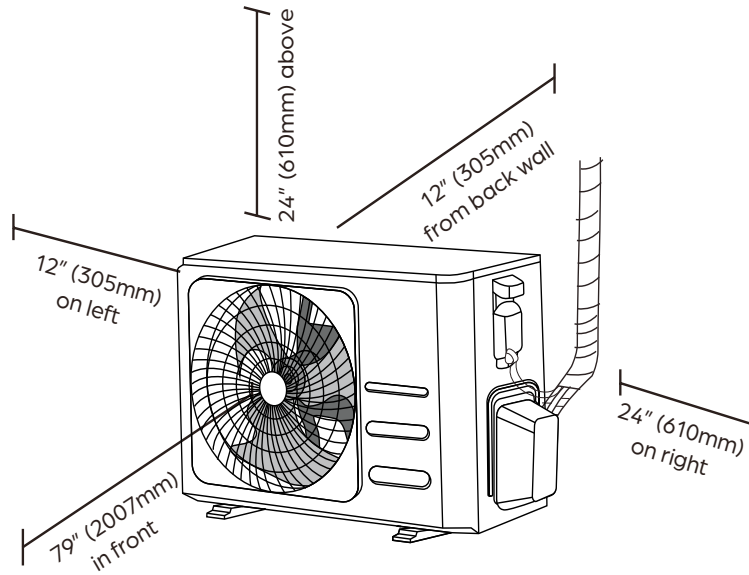

Dimensions

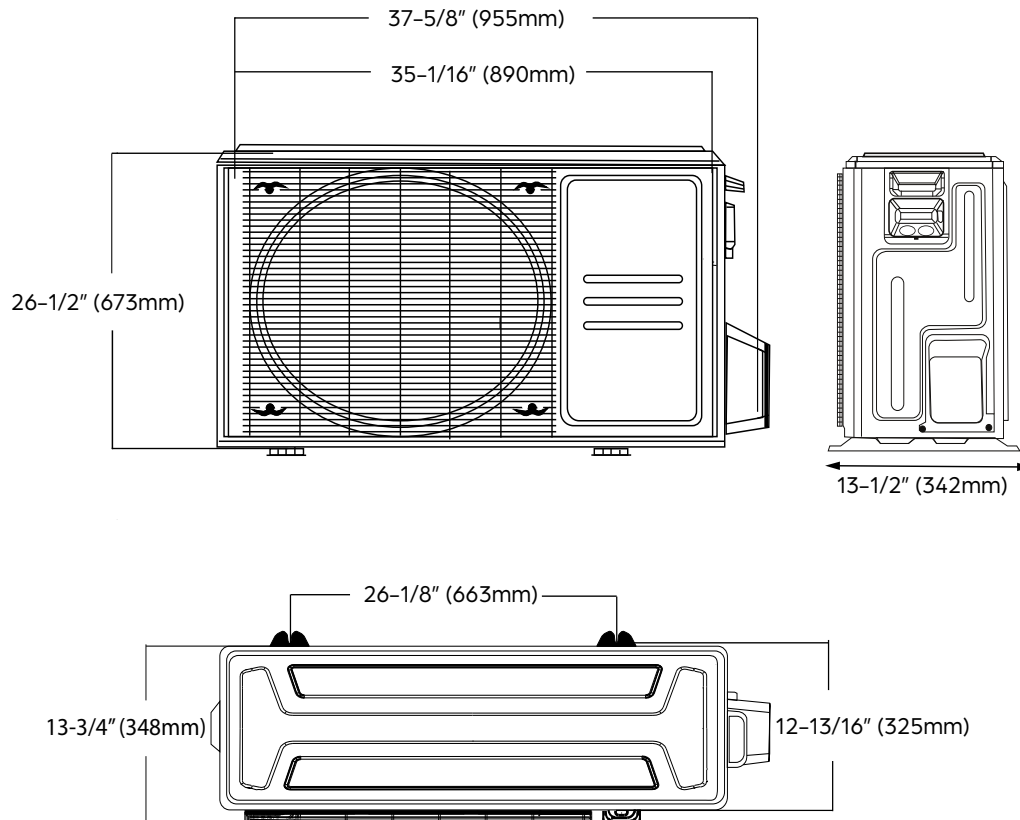

NOTE

- Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.