

TEMPO™ FLAT PANEL IN-WALL SINGLE-BOX

MOUNT SYSTEM

The patent-pending Tempo™ Flat Panel In-Wall Single-Box Mount System is a professional-grade mounting solution that supports small to medium size displays in landscape or portrait orientation, and also provides in-wall storage behind the display for small devices.


The in-wall box and the mount can be ordered together or separately to improve installation workflow efficiencies. The pre-drywall kit (FPIWSBMKIT1) allows contractors to install during the construction phase. The post-drywall kit (FPIWSBMKIT2) includes the interfaces, flanges, display mount and small-device storage panel, and can be installed after wall finishing is complete. For projects requiring both kits, order the all-in-one Tempo Flat Panel In-Wall Single-Box Mount (FPIWSBMS).

This all-in-one wall mounting system can be installed in either steel stud or wood stud construction and is UL Listed for both.


1-TECH™

1-TECH SERVICE ACCESS
One technician can service devices without removing the display, reducing MTTR (Mean Time to Repair).

FPIWSBMS
Tempo Flat Panel In-Wall Single-Box Mount System shown with 40" extended display

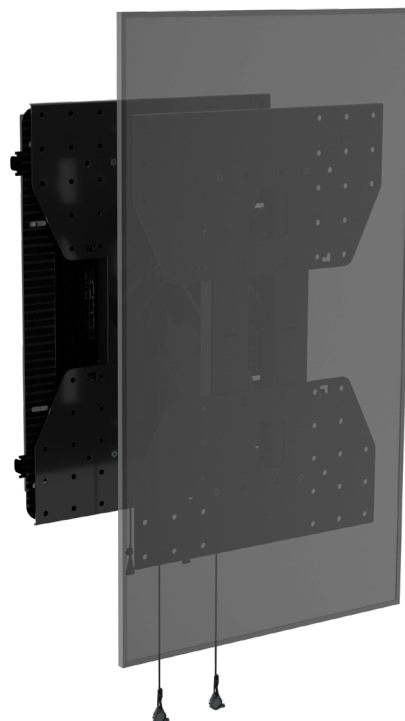

FPIWSBMKIT1
Tempo Flat Panel In-Wall Single-Box Pre-Drywall Kit

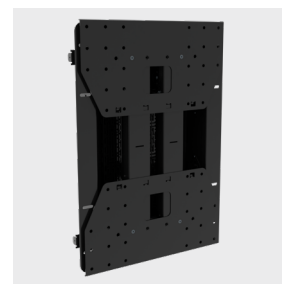

FPIWSBMS
Tempo Flat Panel In-Wall Single-Box Mount System shown in home position

FEATURES

- Supports landscape display sizes: 49" to 65"
- Supports portrait display sizes: 40" to 70"
- Supports displays up to 100 lbs (45.35 kg) when installed to 25 ga. steel studs or wood studs
- UL 2442 Listed – installation on metal or wood studs, 16" O.C.
- VESA mounting patterns: 200x200 to 400x600 mm
- Includes one 10"x15" Lever Lock™ storage panel for dedicated in-wall storage
- In-wall box provides four sizes of side wall knock-outs, allowing freedom to easily route power and data cables
- In-wall box fits between 16" O.C. studs – no cutting of studs is required
- Tilt: -10°/+0°, 2.5° increments
- 10.65" (271 mm) of service extension to easily access devices behind the display
- Lateral shift of +/- 3" (76 mm) to adjust placement of display
- Choose display distance offset from the wall from 0.5" to 2" (13 to 51 mm) (in 0.5" (13 mm) increments)
- 0.5" (13 mm) installed depth from the wall facilitates ADA compliance when paired with displays less than 3.5" (89 mm) deep

TEMPO™ FLAT PANEL IN-WALL SINGLE-BOX


MOUNT SYSTEM

Storage and mount components can be ordered together or separately for installation flexibility.



FPIWSBMKIT1
(Pre-Drywall Kit)

Tempo Flat Panel In-Wall Single-Box Pre-Drywall Kit allows contractors to install the in-wall box during the construction phase.

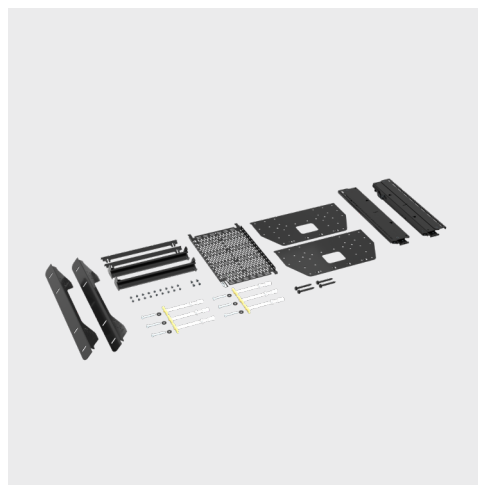

FPIWSBMKIT2
(Post-Drywall Kit)

Tempo Flat Panel In-Wall Single-Box Post-Drywall Kit can be ordered separately and delivered after wall finishing is complete to add flanges, display mount and small device storage panel.



FPIWSBMS

(All-In-One Mounting System)
This all-in-one kit includes both the pre-drywall kit (FPIWSBMKIT1) and post-drywall kit (FPIWSBMKIT2).

TEMPO™ FLAT PANEL IN-WALL SINGLE-BOX


MOUNT SYSTEM

SPECIFICATIONS

PART #	FPIWSBMS	FPIWSBMKIT1	FPIWSBMKIT2
Description	Tempo Flat Panel In-Wall Single-Box Mount System	Tempo In-Wall Single-Box Pre-Drywall Kit	Tempo In-Wall Single-Box Post-Drywall Kit
Prerequisites	None	FPIWSBMKIT2 Must Be Ordered Separately	FPIWSBMKIT1 Must Be Ordered Separately
Typical Display Size	40" - 65"		
Display Orientation	Landscape / Portrait		
Display Mounting Pattern (Landscape)	Min. 200 x 200 mm Max. 400 x 600 mm		
Weight Capacity	100 lbs (45.35 kg)		
Shipping Dimensions (W x H x D)	30.25 x 24.5 x 12.88 inches (768 x 622 x 327 mm)	28.75 x 17.25 x 4.38 inches (730 x 438 x 111 mm)	28 x 20 x 4.25 inches (711 x 508 x 108 mm)
Shipping Weight	55.6 lbs (25.21 kg)	13.8 lbs (6.25 kg)	35.4 lbs (16 kg)
Wall Substrates	16" O.C. 25 ga. steel or wood stud wall		
Interface Height Adjust	± 0.50 inches (12.7 mm)	NA	± 0.50 inches (12.7 mm)
Lateral Shift	Yes, display mounting interfaces can travel the width of the in-wall back box		
Tilt	-10° / +0°; 2.5° increments		
Plumb Adjustment	0.38" (9.5 mm)	NA	
Service Extension	10.65" (271 mm)		
Storage Weight Capacity	20 lbs (9 kg) per Lever Lock plate		
Storage Details	One (1) Lever Lock plate included		One (1) Lever Lock plate included
In-Wall Back Box Knock-Outs	- (6) top/bottom concentric trade conduit size 1/2", 1", 1-1/4" - (2) top/bottom single duplex electrical box - (4) left/right concentric trade conduit size 1/2", 1", 1-1/4", 1-1/2"		NA
TAA Compliant	Yes		
Certifications		UL 2442	UL 2442
UPC	841872179001	841872178981	841872178998


TEMPO™ FLAT PANEL IN-WALL SINGLE-BOX MOUNT SYSTEM

FPIWSBMKIT1

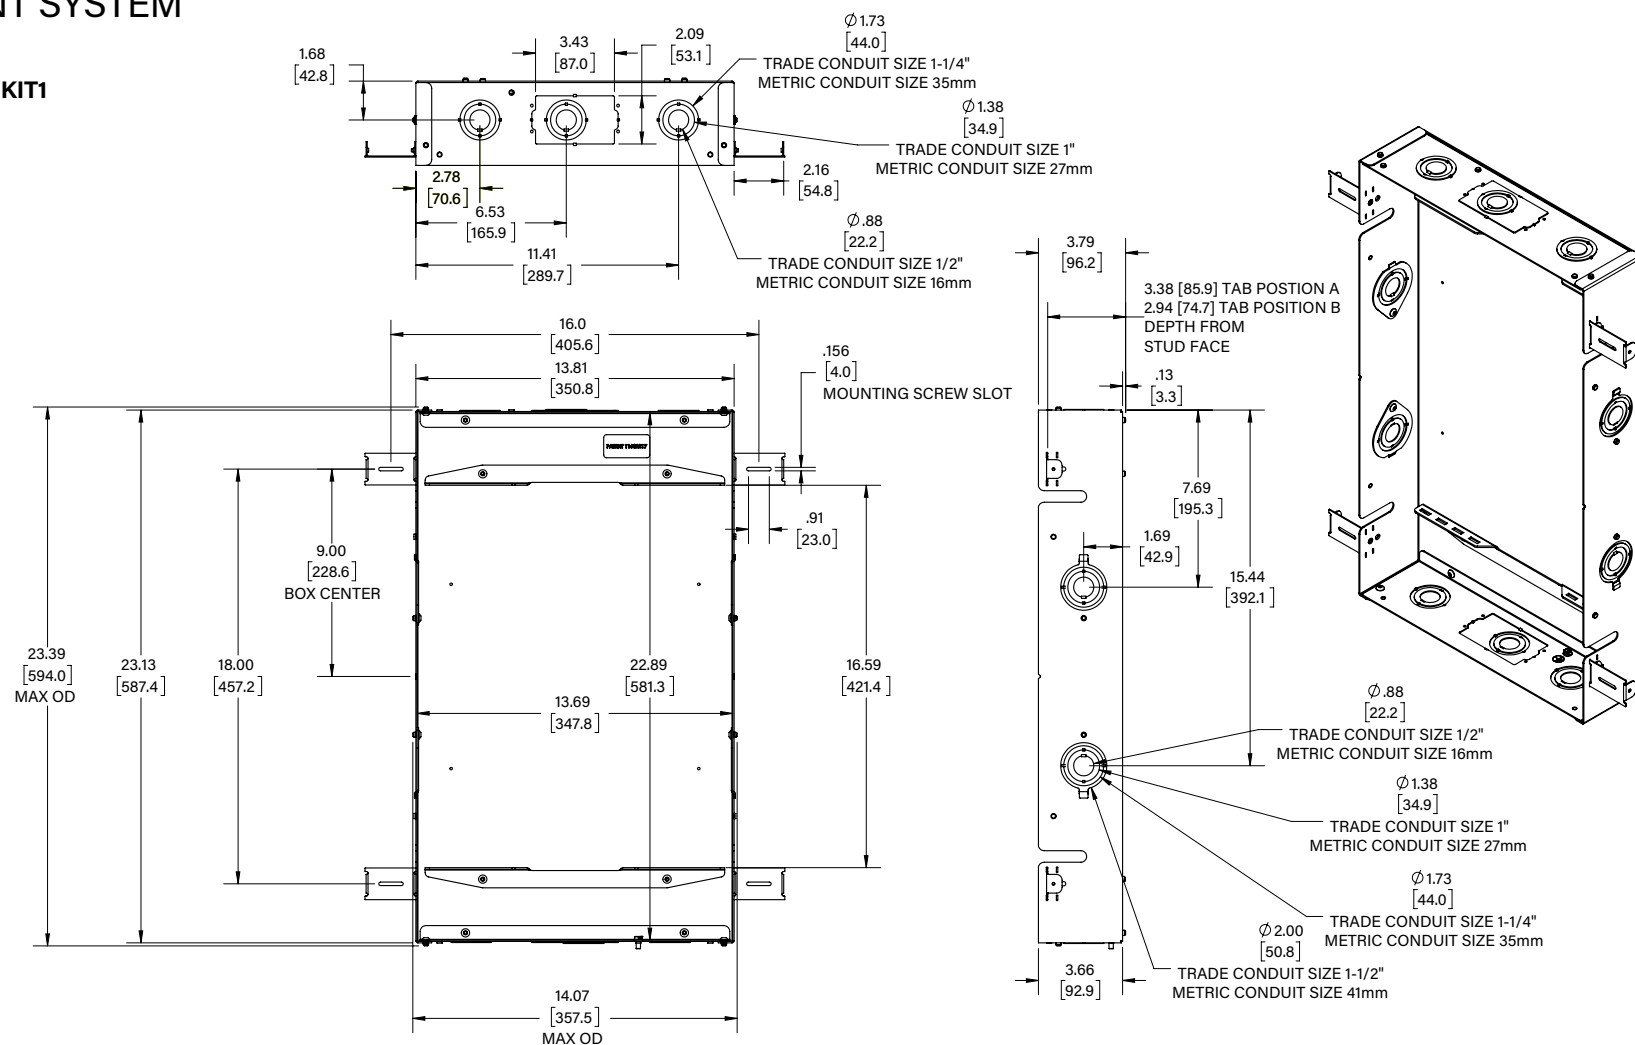

TEMPO™ FLAT PANEL IN-WALL SINGLE-BOX MOUNT SYSTEM

FPIWSBMS

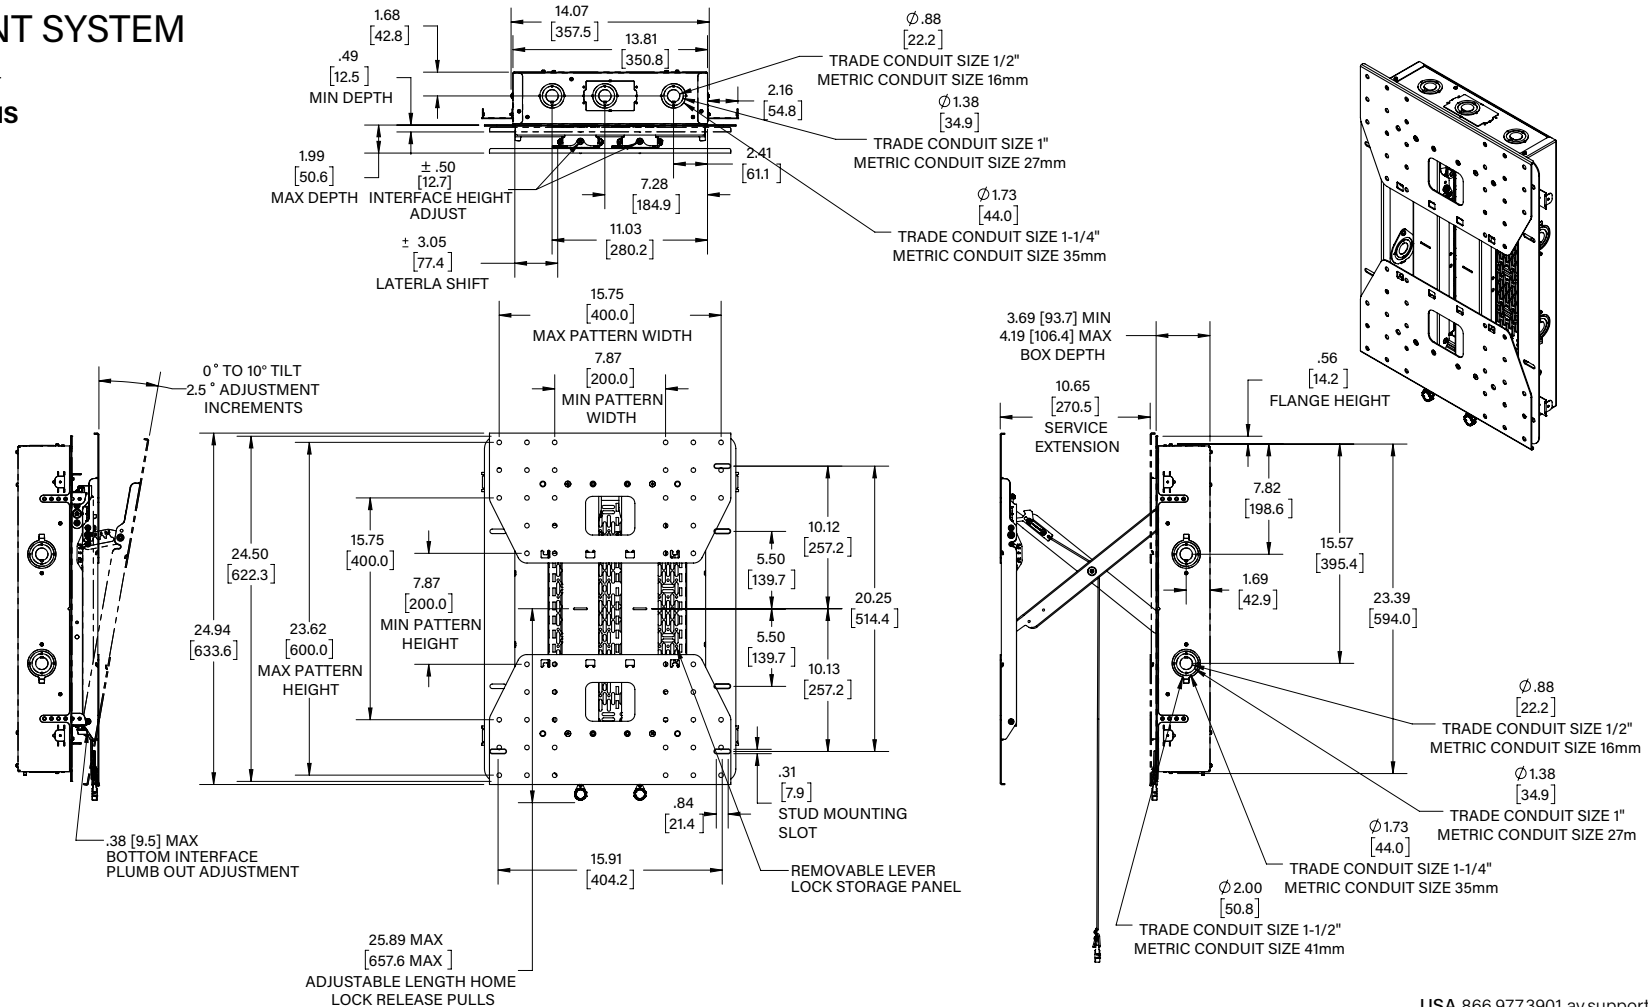

USA 866.977.3901 av.support@legrand.com

CANADA 877.345.4329 av.support@legrand.com

EMEA +31 495 580 840 av.emea.sales@legrand.com

APAC +852 2145 4099 av.asia.sales@legrand.com

C2G | CHIEF | DA-LITE | LUXUL | MIDDLE ATLANTIC | VADDIO | WIREMOLD

©2026 Legrand AV Inc. 260140 Rev A 3/26 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, Vaddio and Wiremold are registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designs. Other patents pending.

CHIEF®
A brand of **legrand**