

INSTALLATION INSTRUCTIONS

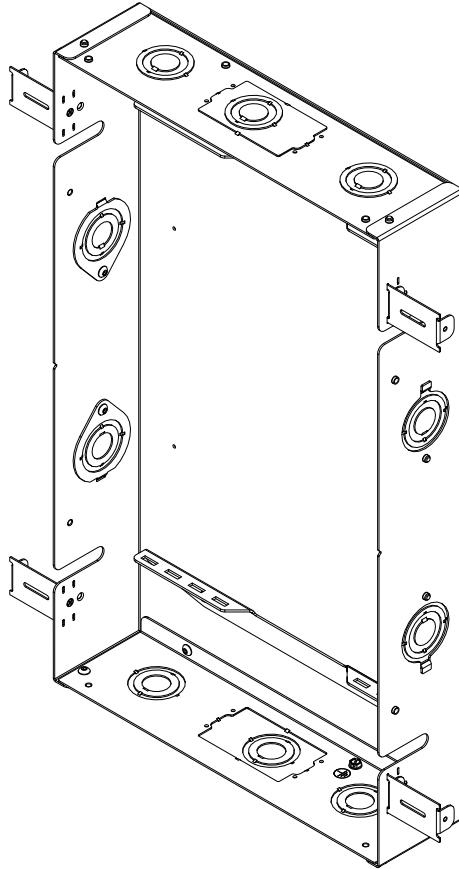

Tempo™ Flat Panel Single In-Wall Box and Stud Tabs Kit

CHIEF®

A brand of  **legrand®**

FPIWSBMKIT1

DISCLAIMER

Legrand | AV and its affiliated corporations and subsidiaries (collectively "Legrand | AV"), intend to make this manual accurate and complete. However, Legrand | AV makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Legrand | AV makes no representation of warranty, expressed or implied, regarding the information contained herein. Legrand | AV assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Legrand AV Inc.

DEFINITIONS

MOUNTING SYSTEM: A MOUNTING SYSTEM is the primary Chief product to which an accessory and/or component is attached.

ACCESSORY: AN ACCESSORY is the secondary Chief product which is attached to a primary Chief product, and may have a component attached or setting on it.

COMPONENT: A COMPONENT is an audiovisual item designed to be attached or resting on an accessory or mounting system such as a video camera, CPU, screen, display, projector, etc.



WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



IMPORTANT SAFETY INSTRUCTIONS



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all mounting systems are properly assembled and installed using the instructions provided.



WARNING: Failure to provide adequate structural strength for this mounting system can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this mounting system is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the mounting system. The wall to which the mounting system is being attached may have a maximum drywall thickness of 1 1/4" (3.2cm). Do not install drywall anchors into the seam between drywall pieces.

IMPORTANT ! : The FPIWSBMKIT1 mounting system is designed to be installed with UL-listed FPIWSBMKIT2 (not included) mounted to a 25 ga minimum steel stud wall or a 2" x 4" wood stud wall with 16" on-center studs. FPIWSBMKIT1 cannot be used as a standalone mounting system and does not have an independent weight capacity when used outside of this configuration.



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the combined FPIWSBMKIT1 and FPIWSBMKIT2 mounting system does not exceed 120 lbs (54.4 kg) total:

- The combined weight of all components attached to the **interface brackets** must not exceed **100 lbs (45.4 kg)**
- The combined weight of all components attached each **storage panel** must not exceed **20 lbs (9.1 kg)**



WARNING: Use this mounting system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.



WARNING: Never operate this mounting system if it is damaged. Return the mounting system to a service center for examination and repair.



WARNING: Do not use this mounting system outdoors.



WARNING: Do not install this mounting system in a firewall.



CAUTION: The FPIWSBMKIT1 mounting system is designed to be mounted to:

- a 25 ga minimum steel stud wall (16" on-center studs only) covered with drywall having a maximum thickness of 1-1/4" and minimum of 1/2";
- a 2" x 4" wood stud wall (16" on-center studs only) covered with drywall having a maximum thickness of 1-1/4" and minimum of 1/2"



CAUTION: The FPIWSBMKIT1 mounting system is only compatible with 16" on-center stud walls.

IMPORTANT ! : The FPIWSBMKIT1 mounting system may accommodate up to two UL-listed electrical box accessories (not included).

IMPORTANT ! : If installing an electrical box, follow all instructions included with the UL-listed electrical box.

NOTES:


- It is the installer's responsibility to ensure that the enclosure is bonded to the ground in the switch box, in accordance with the National Electric Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1. A green grounding screw is provided in the enclosure for the purpose, if required.
- The equipment shall be installed and assembled by qualified service personnel.
- Spacings - To ensure safe operation of the equipment installed in the enclosure, per National Electric Code ANSI/NFPA 70, a minimum separation between power cords and signal or communication cables may be required.

--SAVE THESE INSTRUCTIONS--

DIMENSIONS





**RECOMMENDED ELECTRICAL BOX:
RACO 560 3" X 2" BOX, 2 3/4"
DEEP GANGABLE OR EQUIVALENT.**

**RECOMMENDED ELECTRICAL BOX COVER:
RACO 864 SINGLE DUPLEX**

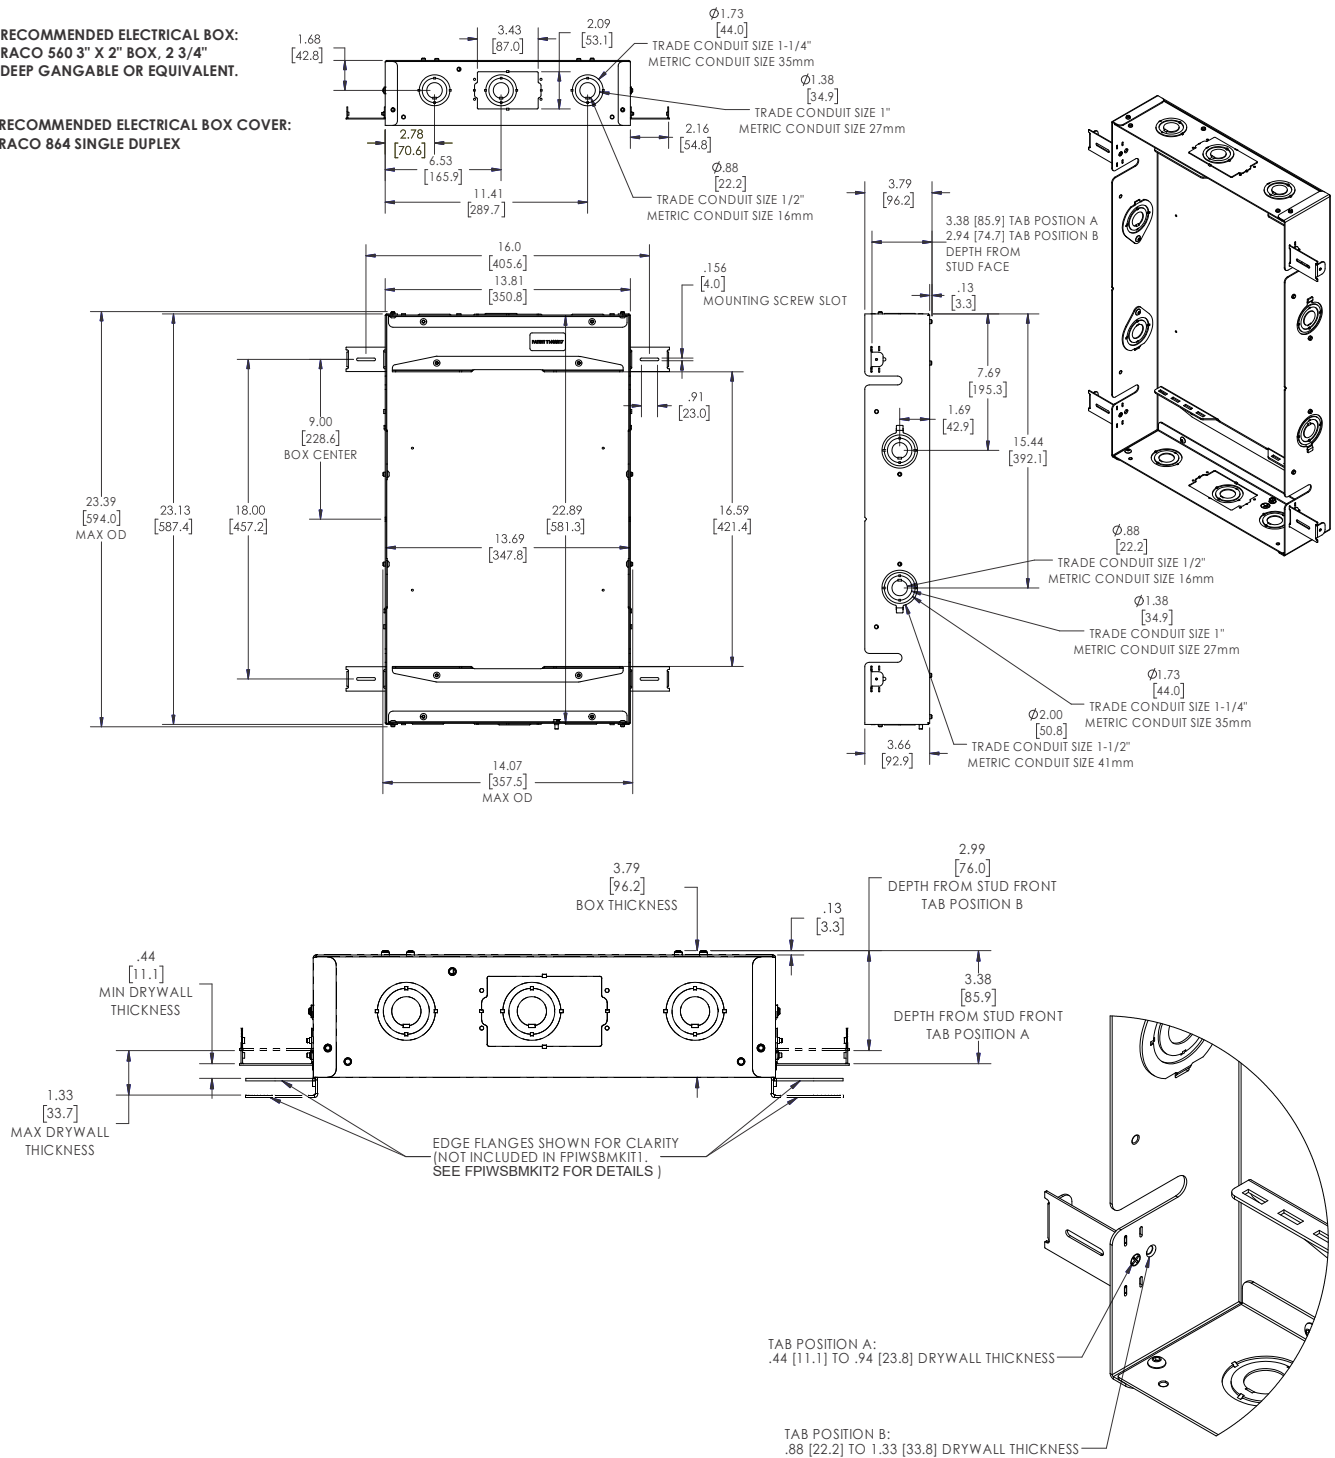


**DIMENSIONS: INCHES
[MILLIMETERS]**


LEGEND

	Tighten Fastener Apretar elemento de fijación Befestigungsteil festziehen Apertar fixador Serrare il fissaggio Bevestiging vastdraaien Serrez les fixations		Pencil Mark Marcar con lápiz Stiftmarkierung Marcar com lápis Segno a matita Potloodmerkteken Marquage au crayon
	Loosen Fastener Aflojar elemento de fijación Befestigungsteil lösen Desapertar fixador Allentare il fissaggio Bevestiging losdraaien Desserrez les fixations		Drill Hole Perforar Bohrloch Fazer furo Praticare un foro Gat boren Percez un trou
	Phillips Screwdriver Destornillador Phillips Kreuzschlitzschraubendreher Chave de fendas Phillips Cacciavite a stella Kruiskopschroevendraaier Tournevis à pointe cruciforme		Adjust Ajustar Einstellen Ajustar Regolare Afstellen Ajuster
	Open-Ended Wrench Llave de boca Gabelschlüssel Chave de bocas Chiave a punte aperte Steeksleutel Clé à fourche		Remove Quitar Entfernen Remover Rimuovere Verwijderen Retirez
	By Hand A mano Von Hand Com a mão A mano Met de hand À la main		Optional Opcional Optional Opcional Opzionale Optie En option
	Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel Chave de cabeça sextavada Chiave esagonale Zeskantsleutel Clé à tête hexagonale		Security Wrench Llave de seguridad Sicherheitsschlüssel Chave de segurança Chiave di sicurezza Veiligheidssleutel Clé de sécurité

TOOLS REQUIRED FOR INSTALLATION

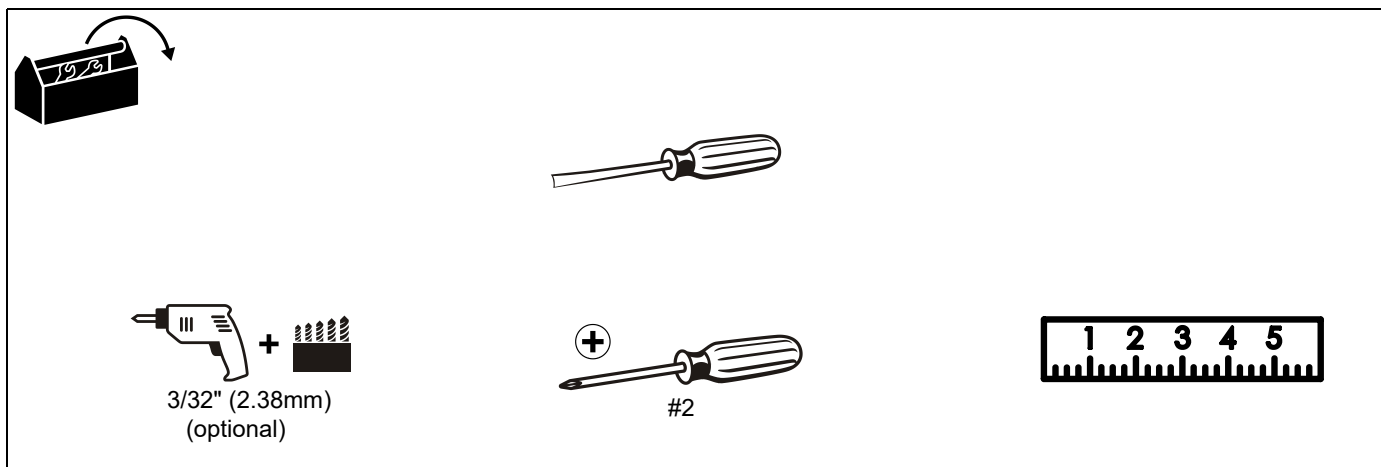

PARTS

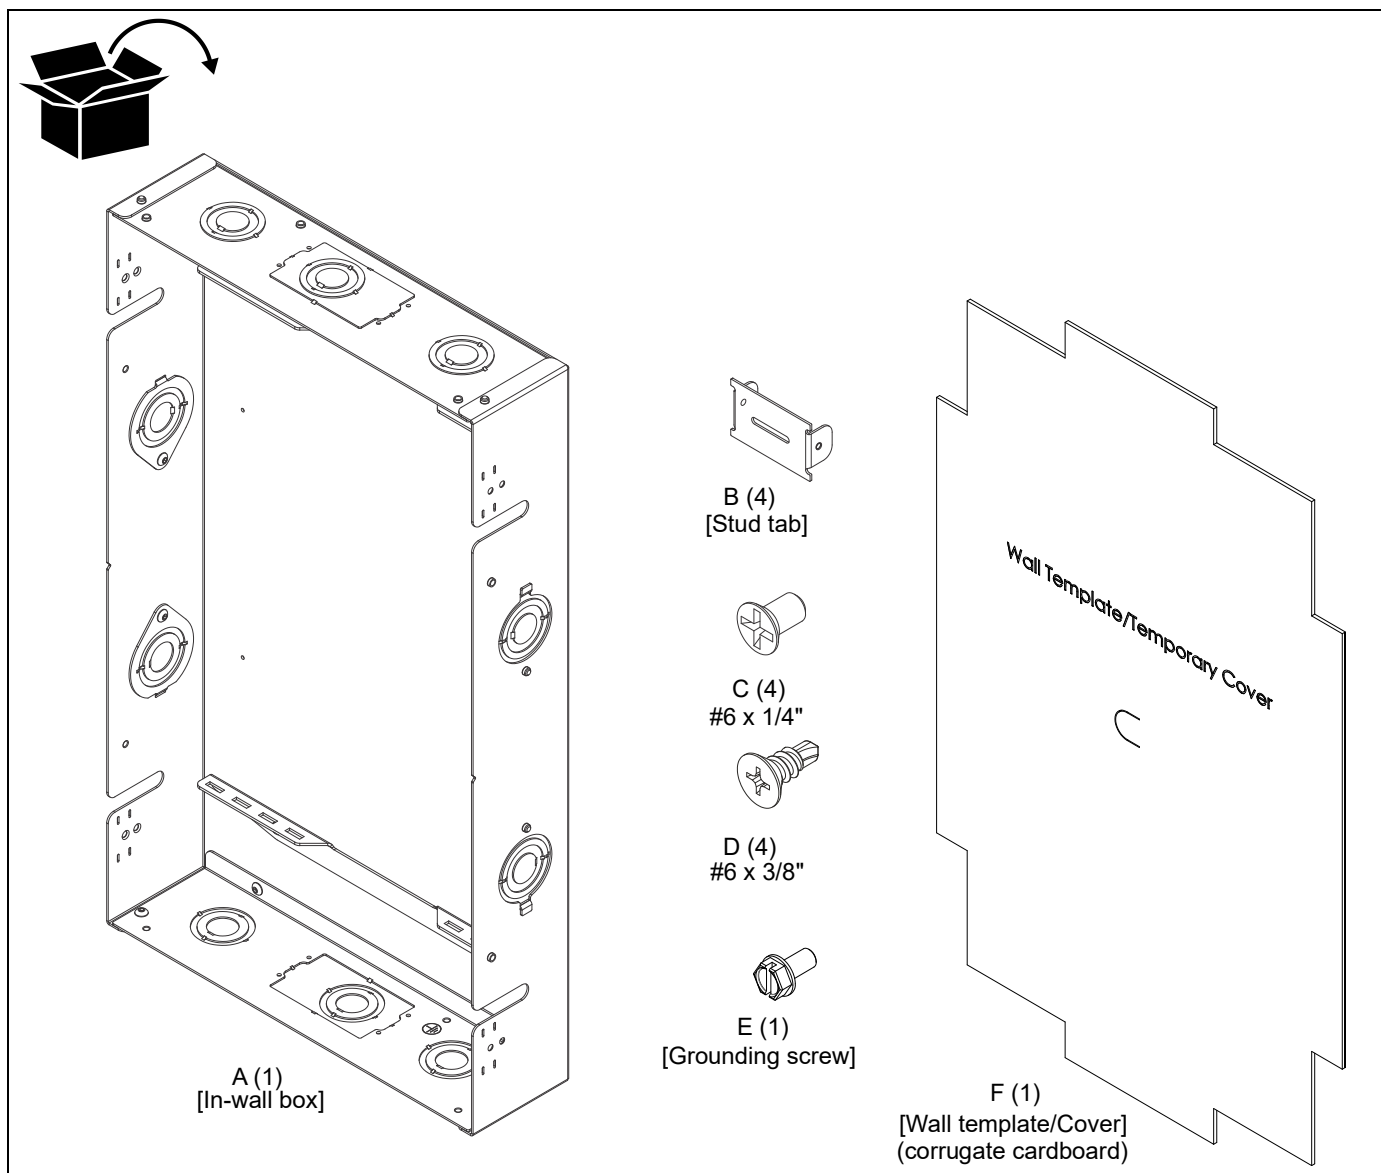

Installation - New Construction

NOTE: If installing into existing wall with drywall already installed, proceed to FPIWSBMKIT2 Installation Instructions - **Installation to Existing Construction Section.**



WARNING: IMPROPER INSTALLATION CAN RESULT IN DEATH OR SERIOUS PERSONAL INJURY! This mounting system should be installed by qualified personnel.

1. Determine mounting location.



WARNING: ELECTRICAL SHOCK HAZARD! CUTTING OR DRILLING INTO ELECTRICAL WIRES OR CABLES CAN CAUSE DEATH OR SERIOUS PERSONAL INJURY! ALWAYS make certain area behind mounting surfaces is free of electrical wires and cables before cutting, drilling, or installing fasteners.



WARNING: EXPLOSION AND FIRE HAZARD! CUTTING OR DRILLING INTO GAS PLUMBING CAN CAUSE DEATH OR SERIOUS PERSONAL INJURY! ALWAYS make certain area behind mounting surfaces is free of gas, water, waste, or any other plumbing before cutting, drilling, or installing fasteners.

IMPORTANT ! : Consult a qualified building contractor to follow all applicable building codes!

2. Use four #6 x 1/4" Phillips flathead screws (C) to secure four stud tabs (B) to first in-wall box (A) to be installed to studs. (See Figure)

IMPORTANT ! : Tab position to use will depend on the thickness of the drywall to be installed.

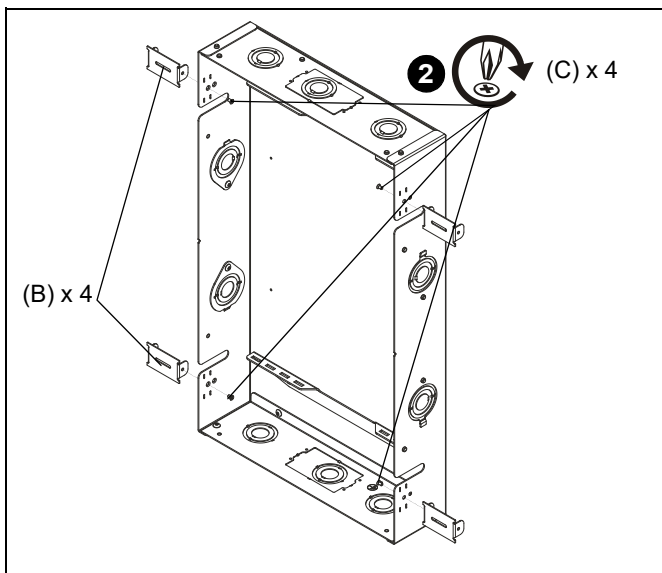


Figure 1

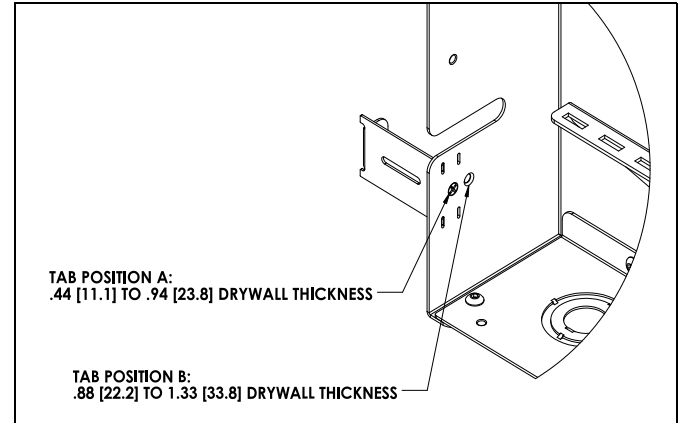


Figure 2

3. Use four #6 x 3/8" Phillips tapping screws (D) to secure four stud tabs (B) to studs at desired mounting height for in-wall box (A). (See Figure 3)

NOTE: Four 3/32" pilot holes may be drilled into studs prior to installation of screws if desired. (See Figure 3)

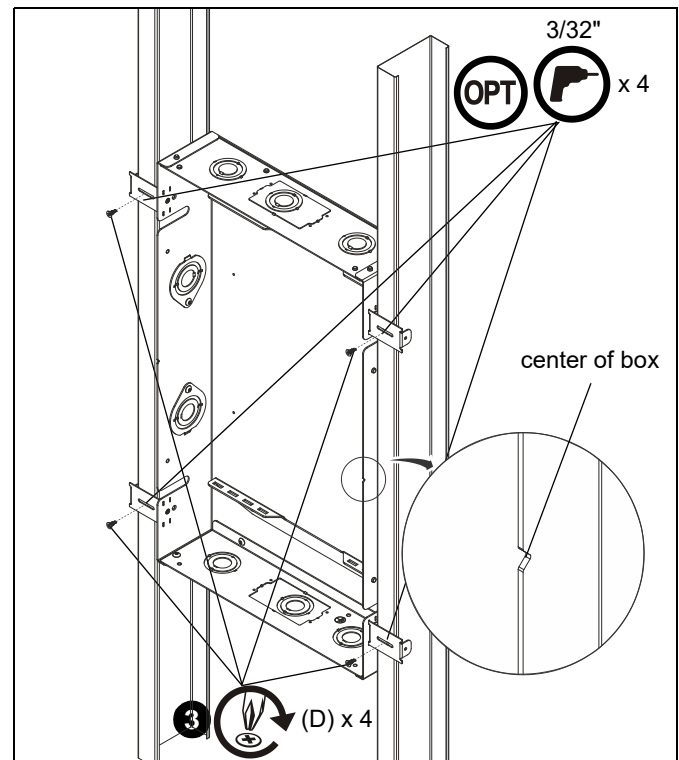


Figure 3

4. (Optional) Install Wall template/Temporary Covers (F) into box openings until ready to install FPIWSBMKIT2 to prevent debris from entering box during drywall installation. (See Figure 7)

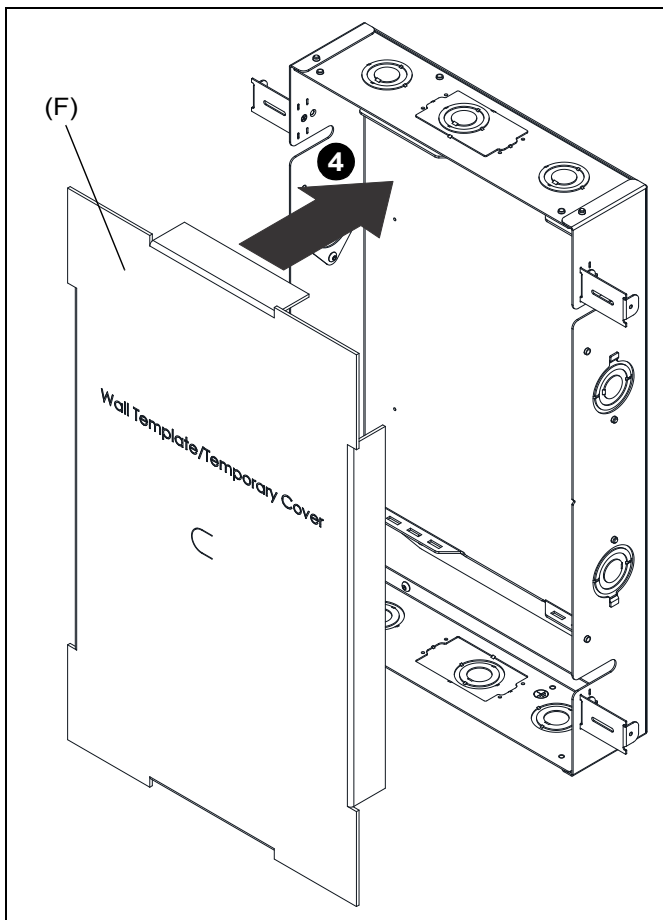


Figure 4

5. Allow drywall to be installed around boxes prior to installing FPIWSBMKIT2 to FPIWSBMKIT1 boxes.

Site Requirements For Steel Stud Wall



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! The figure below identifies the minimum requirements for installation of display

mounts onto a steel stud structure. If the structure or its components do not meet these requirements contact the mount manufacturer for specific instructions before attempting installation. It should also be noted that no other equipment should be mounted to the same stud.



If back side of wall is unfinished, drywall must be installed to a minimum of one stud left and right of the stud(s) being used to install the mount. Drywall must be secured to studs with screws 12" on center

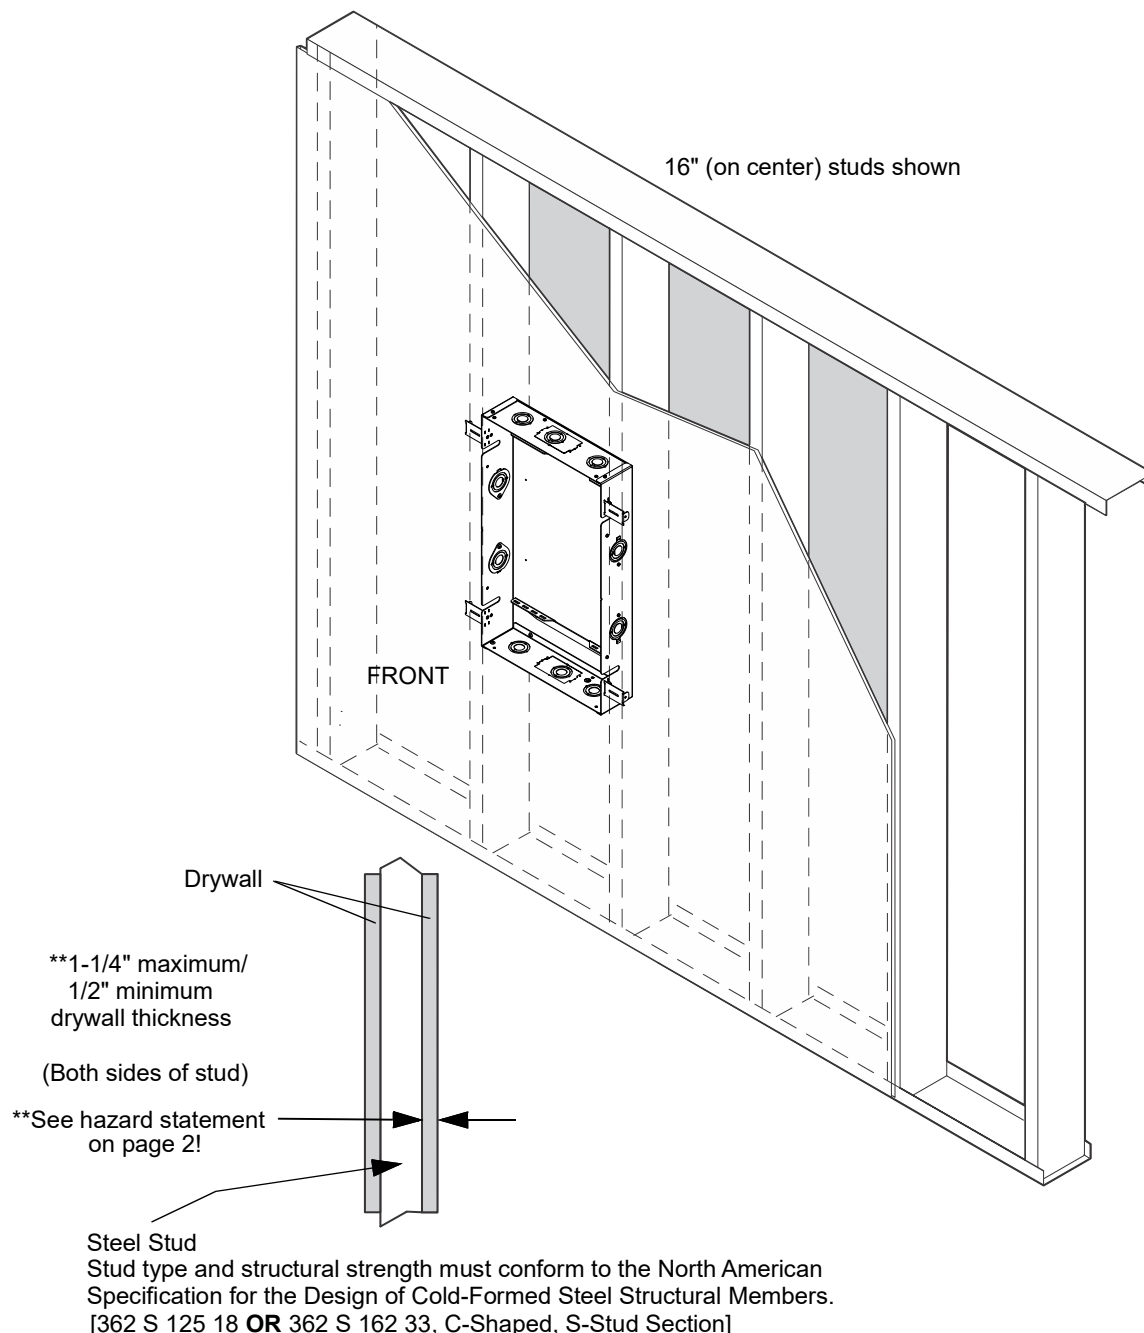


Figure 5

CHIEF®

A brand of  **legrand®**

8800-003465 Rev00
©2026 Legrand | AV
www.legrandav.com
03/2026

USA/International	A	6436 City West Parkway, Eden Prairie, MN 55344
	P	800.582.6480 / 952.225.6000
	F	877.894.6918 / 952.894.6918
Europe	A	Franklinstraat 14, 6003 DK Weert, Netherlands
	P	+31 (0) 495 580 852
	F	+31 (0) 495 580 845
Asia Pacific	A	Office No. 918 on 9/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong
	P	852 2145 4099
	F	852 2145 4477

