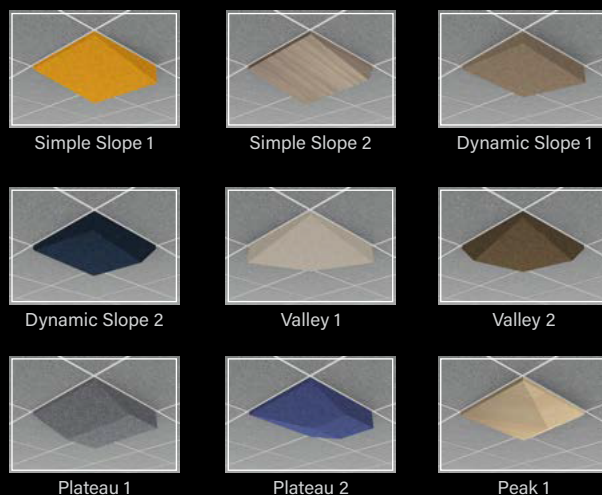
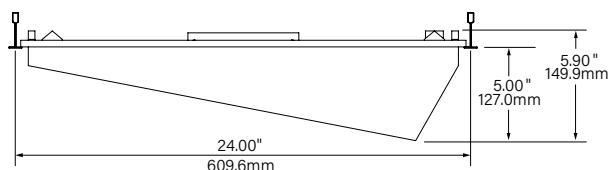




DIMENSIONAL DATA (see page 4 for additional details)

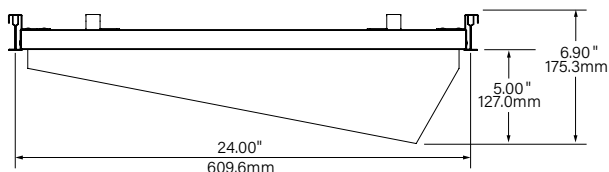
Simple Slope 2




All Ori tiles have a drop of 5.00" at their deepest point

Simple Slope 2

Plenum/Chicago Plenum



Profiles

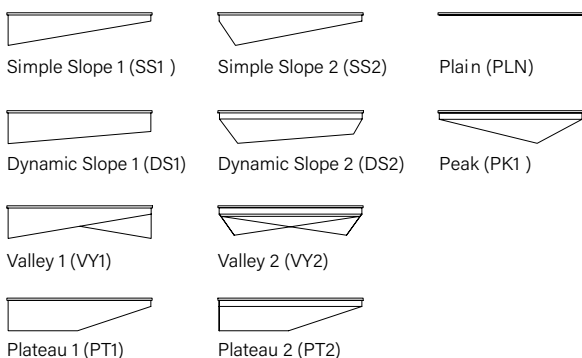

FEATURES

2x2 sound absorbing tiles available in ten design variations to add dimension to the ceiling plane.

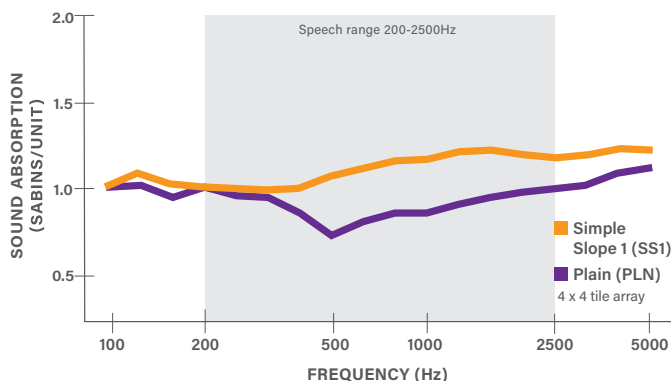
Cut and folded, not thermoformed, to yield crisp, defined edges.

Noise Reduction Coefficient (NRC) average of 1.1, varies for each design. Refer to ASTM C423 test reports for more information.

Wide range of color options provides design flexibility and personalization for any project.

Plenum option meets construction requirements for CCEA (Chicago Plenum) marking, 2015 IMC 602.2 & 2018 NFPA 90A.

ACOUSTIC PERFORMANCE*



*Standard tile only. Plenum results will vary.

SPECIFICATIONS

Acoustic Material

Content	Housing material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) with an ASTM E-84 Class A / CAN ULC S102 fire rating and is moisture resistant. See page 3 for color offering. Acoustic material colors are subject to change without notice. For the most current color options, please visit https://www.legrandav.com/resources/360_product_overviews/acoustic-systems . Lead times may vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm

Acoustic Performance

Acoustic testing is performed on all acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from av.middleatlantic.techsupport@legrand.com. Contact av.middleatlantic.techsupport@legrand.com for technical questions.

NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. Average NRC = 1.1, varies for each design
-----	---

Weight

Individual tiles will not exceed 5lbs. Plenum/Chicago Plenum tiles will not exceed 8lbs.

Assembly & Installation

Ships assembled for quick and easy installation; simply drop in grid ceiling structure.

Reliability

Our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.









ORDERING

Series		AUO
Ori acoustic tile		
Nominal Size		22
2' x 2'		22
(consult factory for custom sizes)		
Profile		
	Simple Slope 1	SS1
	Simple Slope 2	SS2
	Dynamic Slope 1	DS1
	Dynamic Slope 2	DS2
	Valley 1	VY1
	Valley 2	VY2
	Plateau 1	PT1
	Plateau 2	PT2
	Peak 1	PK1
	Plain	PLN
Mounting		
(Ceiling grid by others)		
15/16" Layin		G1
9/16" Layin		G2
Factory Options		
Plenum / Chicago Plenum		CP
(Contact factory for Flush tile)		
Color		
See page 3 for color offering		





Acoustic Materials


MIDDLE ATLANTIC
A brand of

STANDARD PET

	
PURE BLACK PBK	CHARCOAL GRAY CHG
	
SLATE SLT	SHADOW GRAY SDG
	
SILVER GRAY SLG	PEARL ICE PIC
	
CLASSIC WHITE CWH	NATURAL LINEN NTL
	
HAZELWOOD HZW	

PREMIUM PET

			
CORNFLOWER BLUE CFB	DENIM BLUE DNB	MIDNIGHT BLUE MNB	DEEP PURPLE DPP
			
BRICK RED BRD	CHERRY RED CHR	BERRY BRY	BLUSH BLS
			
DEEP WATER DWT	SEAFOAM SFM	EMERALD GREEN EMG	
			
CARROT CRT	PINEAPPLE PNA		
			
LIMESTONE LMS			

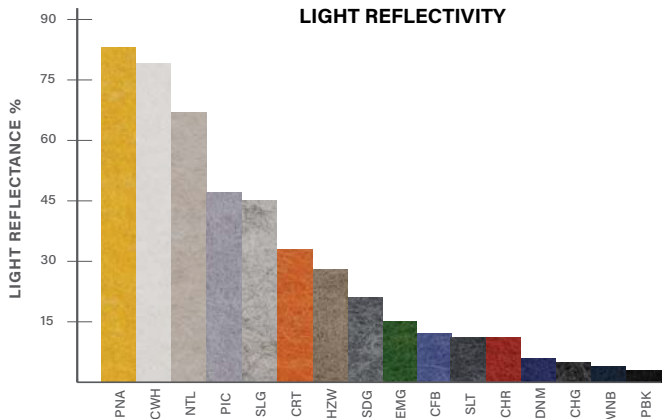



PET
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; N, N'-Ethylene bisstearamide: Octadecanamide, N,N'-1,2-ethanediylbis-; Stearic Acid; Antioxidant 1076: Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester; Antioxidant KY-405: Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]-; Titanium Dioxide: Titanium dioxide

Living Building Challenge Criteria:























I-13 Red List:
■ LBC Red List Free % Disclosed: 100% at 100ppm
□ LBC Red List Approved VOC Content: Not Applicable
□ Declared

I-10 Interior Performance: Not Compliant
I-14 Responsible Sourcing: Not Applicable

FPL-0001
EXP. 01 APR 2025
Original Issue Date: 2020

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

PROFILE DETAILS

Simple Slope 1 (SS1)   	Simple Slope 2 (SS2)   	Dynamic Slope 1 (DS1)   	Dynamic Slope 2 (DS2)   	Valley 1 (VY1)   
Valley 2 (VY2)   	Plateau 1 (PT1)   	Plateau 2 (PT2)   	Peak (PK1)   	Plain (PLN)   

USA 866.977.3901 av.support@legrand.com
CANADA 877.345.4329 av.support@legrand.com
EMEA +31 495 580 840 av.emea.sales@legrand.com
APAC +852 2145 4099 av.asia.sales@legrand.com

C2G | CHIEF | DA-LITE | LUXUL | MIDDLE ATLANTIC | VADDIO | WIREMOLD

**MIDDLE
ATLANTIC.**
A brand of  legrand