




FLEXIBLE Grommets

Model: HT1015-WH-10PK

OWNERS GUIDE

Doc#: 1507346 Rev. A



IMPORTANT SAFETY INSTRUCTIONS


PLEASE READ ENTIRE MANUAL PRIOR TO USE — SAVE THESE INSTRUCTIONS

CAUTION: Avoid potential personal injuries and property damage!

- For low voltage cabling only (HDMI, audio, coax or data cabling), DO NOT run power cords in-wall.
- Please read through these instructions completely to be sure you're comfortable with this easy install process.
- Do not use this product for any purpose not explicitly specified by manufacturer.
- Manufacturer is not responsible for damage or injury caused by incorrect assembly or use.
- If you do not understand these instructions or have doubts about the safety of the installation, assembly or use of this product, contact customer service.

Parts Included

WARNING: Before starting assembly, verify all parts are included and undamaged. If any parts are missing or damaged, do not return the damaged item to your dealer; contact Customer Service. Never use damaged parts!



Grommets
qty. 10

This product requires drilling a 1½ inch hole.
Hole saw is NOT INCLUDED.

Tools Required




Tape Measure



Pencil




Electric Drill




1½ in.
Hole Saw

Verify SURFACE Compatibility





NOTE: Walls with blown-in type insulation may require removal of some insulation inside the cavity.



Minimum Thickness
for Drywall: 1/2 in.

Minimum Space
into Wall: 1 in.



Minimum Thickness
for Panel: 1/2 in.


Minimum Space
into Furniture: 1 in.

STEP 1

Drill HOLES

Drill the holes at your desired locations.


Verify your cable length BEFORE drilling.

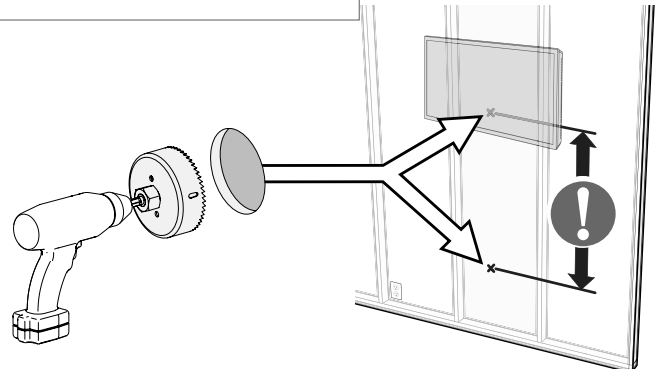


STEP 2

Assemble (1 grommet illustrated)


a Route Cable(s)




TIP: Use a fish tape to pull cables through the wall.




B Insert Grommets

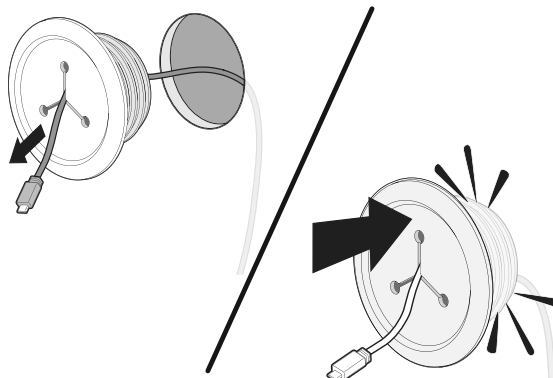

C Plug In



TO REMOVE



Legrand, Inc. and its affiliated corporations and subsidiaries (collectively, "Legrand"), intend to make this manual accurate and complete. However, Legrand makes no claim that the information contained herein covers all details, conditions, or variations. Nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Legrand makes no representation of warranty, expressed or implied, regarding the information contained herein. Legrand assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

©2023 Legrand. All Rights Reserved.

Legrand, Inc. • 301 Fulling Mill Rd; Suite G • Middletown, PA 17057 • 800.321.2343 • 1.877.BY.LEGRAND • www.legrand.us




MINI Grommets

Model: HT1020-WH-4PK

OWNERS GUIDE

Doc#: 1507346 Rev. A



IMPORTANT SAFETY INSTRUCTIONS

PLEASE READ ENTIRE MANUAL PRIOR TO USE — SAVE THESE INSTRUCTIONS


CAUTION: Avoid potential personal injuries and property damage!

- For low voltage cabling only (HDMI, audio, coax or data cabling), DO NOT run power cords in-wall.
- Please read through these instructions completely to be sure you're comfortable with this easy install process.
- Do not use this product for any purpose not explicitly specified by manufacturer.
- Manufacturer is not responsible for damage or injury caused by incorrect assembly or use.
- If you do not understand these instructions or have doubts about the safety of the installation, assembly or use of this product, contact customer service.

Parts Included


WARNING:

Before starting assembly, verify all parts are included and undamaged. If any parts are missing or damaged, do not return the damaged item to your dealer; contact Customer Service. Never use damaged parts!

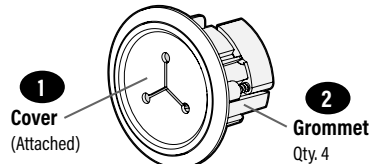

This product requires drilling a 2-inch hole.
Hole saw is NOT INCLUDED.


Tools Required

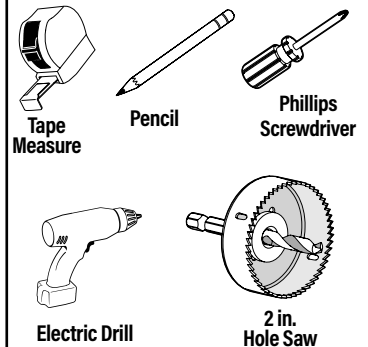

Verify SURFACE Compatibility



NOTE: Walls with blown-in type insulation may require removal of some insulation inside the cavity.



Minimum Thickness
for Drywall: 1/2 in.


Minimum Space
into Wall: 1 1/2 in.

STEP 1

Drill HOLES

Drill the holes at your desired locations.


Verify your cable length BEFORE drilling.

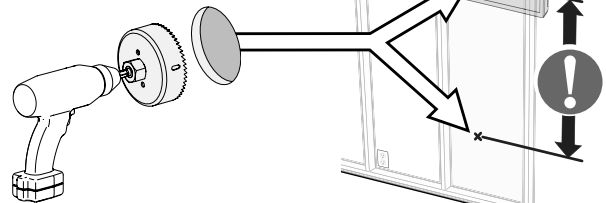


STEP 2

Assemble (1 grommet illustrated)


a Insert Grommets

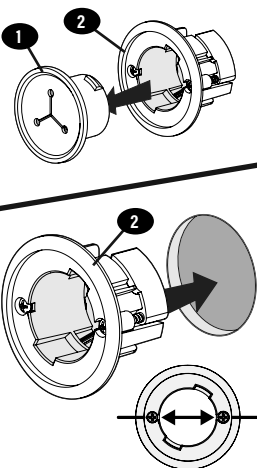


b Lock Grommets

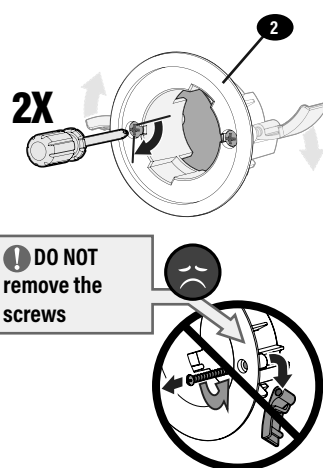


c Route Cable(s)

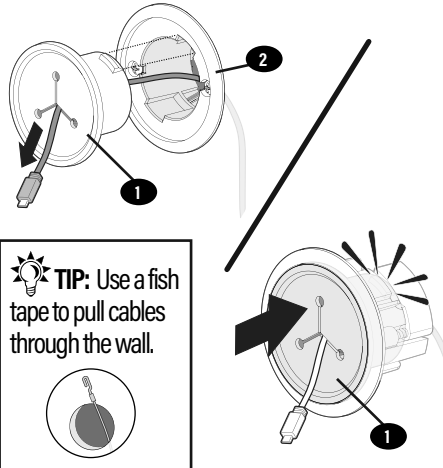

d Plug In



TO REMOVE



Legrand, Inc. and its affiliated corporations and subsidiaries (collectively, "Legrand"), intend to make this manual accurate and complete. However, Legrand makes no claim that the information contained herein covers all details, conditions, or variations. Nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Legrand makes no representation of warranty, expressed or implied, regarding the information contained herein. Legrand assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

©2023 Legrand. All Rights Reserved.

Legrand, Inc. • 301 Fulling Mill Rd; Suite G • Middletown, PA 17057 • 800.321.2343 • 1.877.BY.LEGRAND • www.legrand.us