# Ori® Acoustic Tile

MIDDLE ATLANTIC

AUO


AirCore® Technology



## BEFORE YOU BEGIN

- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Middle Atlantic Products accepts no responsibility for inadequatley reinforcing and preparing walls and/or ceilings.
- The information contained in this drawing is the sole property of Middle Atlantic Products. Any reproduction in part or whole without the written permission of Middle Atlantic Products is prohibited.

## **COMPONENT KEY**

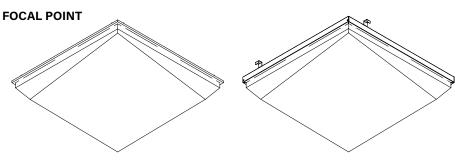

Standard Assembly

Plenum/Chicago Plenum Assembly


### **INSTRUCTION KEY**



**ATTENTION** 

#### **PROFILE KEY**

SIMPLE SLOPE 1 (SS1)



5.0"




SIMPLE SLOPE 2 (SS2)



5.0"




DYNAMIC SLOPE 1 (DS1)



5.0"



DYNAMIC SLOPE 2 (DS2)








VALLEY 1 (VY1)








VALLEY 2 (VY2)



5.0"




PLATEAU 1 (PT1)



5.0"



PLATEAU 2 (PT2)







PEAK 1 (PK1)







PLAIN (PLN)








#### **ORI ACOUSTIC TILE**

**DO NOT** apply any weight on or suspend objects from tile.



## STANDARD INSTALLATION





## **ORI ACOUSTIC TILE - PLAIN**


AUO-22-PLN


To integrate with sprinkler heads, downlights or other ceiling objects, it is recommended to only cut PLAIN (PLN) acoustic tiles, using a utility knife with fresh blade and a steady hand.

DO NOT apply any weight on or suspend objects from tile.





## PLENUM/CHICAGO PLENUM INSTALLATION



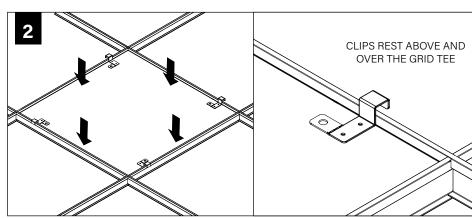

## SECURE TO STRUCTURE ABOVE [OPTIONAL]





240412 REV. B 2 of 2