



PLUS SERIES

Pro Essentials.

STANDARD SPEED CL2P HDMI™ CABLE WITH GRIPPING CONNECTORS

Strict building code requirements for cabling in plenum spaces have created installation challenges in settings such as schools, hospitals, and other commercial buildings. This CL2P rated cable meets all requirements for commercial, industrial, hospital, and school spaces that require CL2P plenum cable to be installed.

C2G Plus Series HDMI™ Cables with Gripping Connectors are designed to connect multimedia devices in an office, meeting room, or other commercial environments. Ensure that your most critical equipment maintains signal with the gripping connectors, which provide greater port retention than a standard HDMI connector. Gripping connectors limit the chance the cable could be accidentally disconnected. No need for special locking sockets, tie downs or screws.

Make every presentation count by delivering crisp audio and pristine high definition video to any audience. Whether streaming video or displaying a presentation, this cable is an ideal solution to provide content in demanding environments.





PLUS SERIES

Pro Essentials.

STANDARD SPEED CL2P HDMI™ CABLE
WITH GRIPPING CONNECTORS

FEATURES

- CL2P Plenum rated jacket
- Gripping connectors
- Supports up to 1080p @60Hz video resolution
- Supports HDMI™ 1.4 technology
- Gold plated connectors

PLUS SERIES STANDARD SPEED CL2P HDMI® CABLE WITH GRIPPING CONNECTORS	
42528	15ft (4.6m) C2G Plus Series Standard Speed CL2P HDMI Cable With Gripping Connectors - CL2P - Plenum Rated
42529	25ft (7.6m) C2G Plus Series Standard Speed CL2P HDMI Cable With Gripping Connectors - CL2P - Plenum Rated
42530	35ft (10.7m) C2G Plus Series Standard Speed CL2P HDMI Cable With Gripping Connectors - CL2P - Plenum Rated
42531	40ft (12.2m) C2G Plus Series Standard Speed CL2P HDMI Cable With Gripping Connectors - CL2P - Plenum Rated
42532	50ft (15.2m) C2G Plus Series Standard Speed CL2P HDMI Cable With Gripping Connectors - CL2P - Plenum Rated



PLUS SERIES

Pro Essentials.

STANDARD SPEED CL2P HDMI™ CABLE
WITH GRIPPING CONNECTORS

ELECTRICAL SPECIFICATIONS	Conductor Resistance	at 20°C Max 24AWG: 94.2Ω/KM
	Impedance	100±10 Ω
PHYSICAL CHARACTERISTICS	Operating Temperature	0° to 50° C; 10-85% Relative Humidity
	Storage Temperature	-25°C to +70°C
	Connectors	HDMI Male
	Minimum Bend Radius	135mm
	Contacts	Gold Plated; Gold Flash Shell
	Cable Diameter	9mm±0.5mm
	Cable Gauge	24AWG
	Shield	Aluminum Foil - 100% Coverage / Braid - Tinned Copper (24/7/0.12mm)
	Port Retention	6.6lbs Minimum Withdraw Force
	Jacket Rating	CL2P
	Contact Material	Gold Flashing
	Regulatory Approvals	Product is CE Marked and Conforms to 2011/65/EU ROHS 2




PLUS SERIES

Pro Essentials.

STANDARD SPEED CL2P HDMI™ CABLE
WITH GRIPPING CONNECTORS

TECHNICAL DRAWING

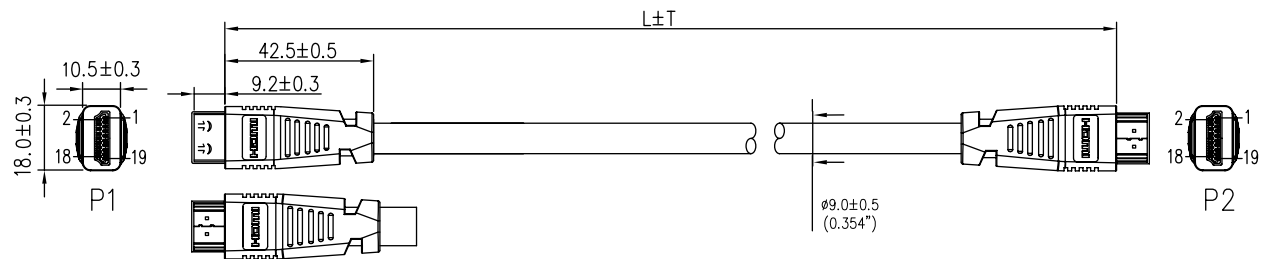

LEGRAND | AV COMMERCIAL BRANDS
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | legrandav.com

USA 800.506.9607 customer-service@c2g.com

©2021-24 Legrand AV Inc. 240039 Rev A 10/24 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, Vaddio, and Wiremold are registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.