



PLUS SERIES

Pro Essentials.

STANDARD SPEED CMP HDMI™ CABLE

The C2G Plus Series Standard Speed HDMI™ Cable - Plenum CMP-Rated is the perfect solution for extending HDMI signals in classrooms, conference rooms, houses of worship, or anywhere you need longer-length connections. The commercial-grade plenum cables offer digital performance while meeting the highest standards in fire resistance.

These cables support resolutions up to 1080p @60Hz with bandwidths up to 4.95Gbps for displays and up to 1920 x 1200 pixels for computers, and with lengths ranging from 15 to 50 feet, this series is the ideal connectivity solution for A/V equipment used in classrooms or conference rooms. The 24K gold-plated connectors prevent metal corrosion, producing optimal signal transfer and shielded 24AWG copper conductors protect against EMI and RFI to ensure uninterrupted performance.

*CL2 is equivalent to FT4 rating in Canada, while CMP is equivalent to FT6.





PLUS SERIES

Pro Essentials.

STANDARD SPEED CMP
HDMI™ CABLE

FEATURES

- Plenum, CMP-rated
- Supports up to a 1080p resolution @60Hz
- Gold plated connectors for increased electrical conductivity and enhanced durability
- 24 AWG conductor construction

| PLUS SERIES STANDARD SPEED CMP HDMI™ CABLE | |
|--|---|
| 41190 | 15ft (4.6m) C2G Plus Series Standard Speed HDMI Cable - Plenum CMP-Rated |
| 41191 | 25ft (7.6m) C2G Plus Series Standard Speed HDMI Cable - Plenum CMP-Rated |
| 41192 | 35ft (10.7m) C2G Plus Series Standard Speed HDMI Cable - Plenum CMP-Rated |
| 41193 | 50ft (15.2m) C2G Plus Series Standard Speed HDMI Cable - Plenum CMP-Rated |



PLUS SERIES

Pro Essentials.

STANDARD SPEED CMP
HDMI™ CABLE

| | | CG50611-2 AND CG50611-2 |
|------------------------------|-----------------------|---|
| ELECTRICAL SPECIFICATIONS | Voltage Rating | 30V |
| | Conductor Resistance | at 20°C max 24AWG: 93.25Ω/km |
| | Rating Temperature | 75°C |
| PHYSICAL CHARACTERISTICS | Operating Temperature | 0°C to +50°C |
| | Storage Temperature | -25°C to +70°C |
| | Connectors | HDMI 19P Male, Gold Plate Contacts and Shell |
| | Shielding | Copper Foil Shield |
| | Jacket Thickness | 0.58mm ± 0.012 |
| | OD | 8.35MM |
| | Cable Rating | Plenum – CMP – Rated |
| | Minimum Bend Radius | 125.73mm |
| | Regulatory Approvals | Product is CE marked and conforms to 2011/65/EU RoHS2 |




PLUS SERIES

Pro Essentials.

STANDARD SPEED CMP
HDMI™ CABLE

TECHNICAL DRAWING

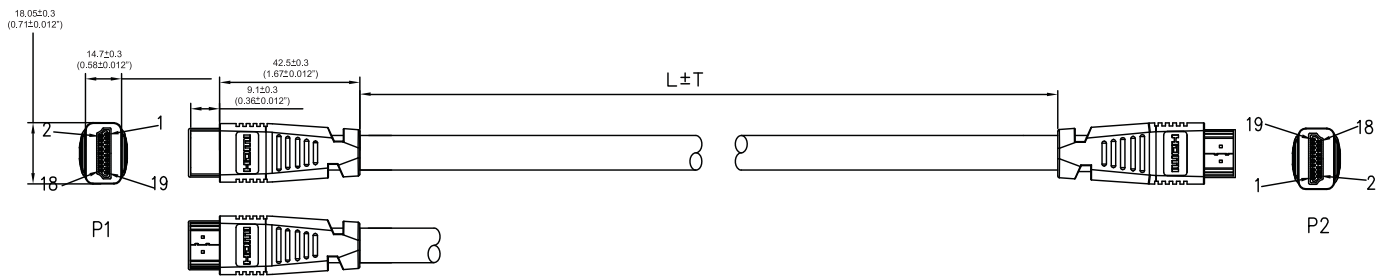

LEGRAND | AV COMMERCIAL BRANDS
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | legrandav.com

USA 800.506.9607 customer-service@c2g.com

©2024 Legrand AV Inc. 240042 Rev A 10/24 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, Vaddio, and Wiremold are registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.