

6260



SOFT SERVE FREEZER

Twin twist flavor, Floor, Gravity feed,
Microprocessor control, Independent refrigeration and
control system for each flavor

Product Offering

Offer all popular soft serve variations from low or
non-fat ice cream to custards, yogurt and sorbet

Freezing Cylinder

Two, 3.2 Liter (3.38 quarts)

Mix Hopper

Two, 15 Liters (15.9 quarts)
Separate hopper refrigeration maintains mix
temperature below 4.4°C (40°F) during Cool and
Standby modes.

Mix Low Indicator

When mix level is low, the Mix Low light turns "ON"
to alert operator to add mix.

Standby

Maintains product temperature in the mix hoppers
and freezing cylinders below 4.4°C (40°F) during
long no-use periods.

Microprocessor Controls

Automatically regulates refrigeration and maintains
consistent product quality by controlling product
temperature and viscosity.

Counter

Records number of dispenses per day and total
number of dispenses.

Temperature Display

Displays hopper and cylinder temperature; helps
control product safety

Output

720 Cups/Hour
(80 gram/cup at 4°C Liquid & 24°C Ambient)

Safety Protections

- Low temperature and motor overload cutouts
protect from cylinder over freezing.
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Model 6260




Selected 60Hz
Models

50Hz
Models



Flexible Beater Blade (optional)
Higher capacity, higher overrun

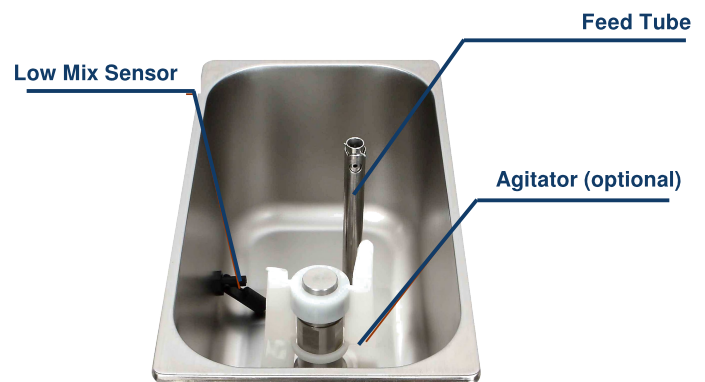


SPACEMAN USA

CORPORATE OFFICE: 4635 Nautilus Court South - Unit C | Boulder, CO 80301

PHONE: (888) 610-5520

WEB: WWW.SPACEMANUSA.COM

Model 6260

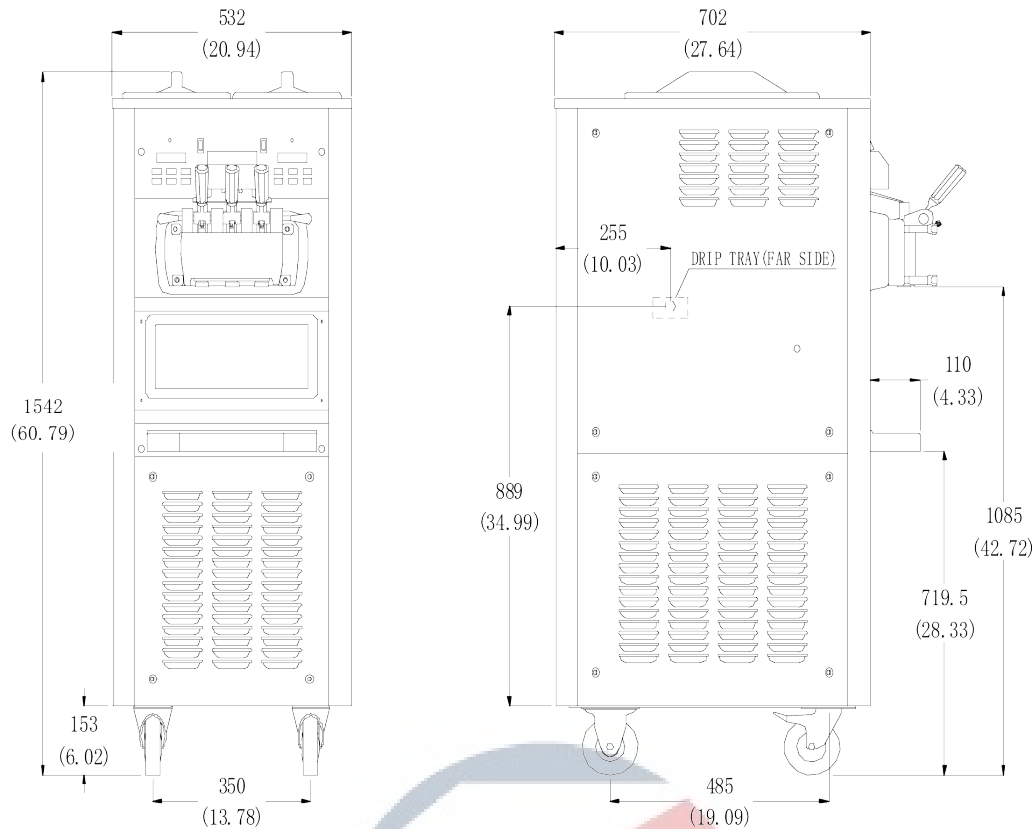

| Weight | Kg/lb |
|----------|-----------|
| Net | 242 / 538 |
| Shipping | 262 / 582 |

Packaging Volume 1.09 CBM / 38.56 CBF

| Dimensions | Net (mm/in) | Shipping (mm/in) |
|------------|-------------|------------------|
| Width | 532 / 20.9 | 710 / 28.0 |
| Depth | 702 / 27.6 | 890 / 35.0 |
| Height | 1542 / 60.8 | 1730 / 68.1 |

| Electrical | Maximum Fuse Size | Min. Circuit Ampacity | Poles (P) Wires(W) |
|--------------|-------------------|-----------------------|--------------------|
| 208-230/60/1 | 30 | 20 | 3P/3W |
| 208-230/60/3 | 20 | 16 | 4W |

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.
(For exact electrical information, always refer to the data label of the unit.)*

Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

Specifications

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

Motor

Two, 1.25HP (1PH) or 1.0HP (3PH)

Refrigeration System

Main Compressor: One, 10,000 BTU/HR, R404A

Separate Hopper Cooling Compressor:

One, 480 BTU/HR, R134A

(BTUs may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm (6") on unit left, right and back sides is required to achieve optimum performance.

Options

- Water Cooled.
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
- Cone dispenser



SPACEMAN USA

CORPORATE OFFICE: 4635 Nautilus Court South - Unit C | Boulder, CO 80301

PHONE: (888) 610-5520

WEB: WWW.SPACEMANUSA.COM