


NEXUS WHITE MOULDED RCD Protected Socket

Single, switched, DP, 13A, with integrated Type-A RCD
821DPARCD-01

MAIN FEATURES

- 13A Rated
- Integrated Type A RCD to prevent the leakage of electrical current
- Angled in-line colour coded terminals with backed out screws for fast installation
- Latching operation: socket returns to original state when power is resumed
- Trip current - 30mA trip current 40mS trip speed
- Angled colour coded terminals with backed out screws for fast installation
- Anti-microbial certified - inhibits 99% of bacterial growth on touch point surfaces from infectious diseases including MRSA, E-Coli, Salmonella and Klebsiella Pneumonia bacteria
- Double Pole

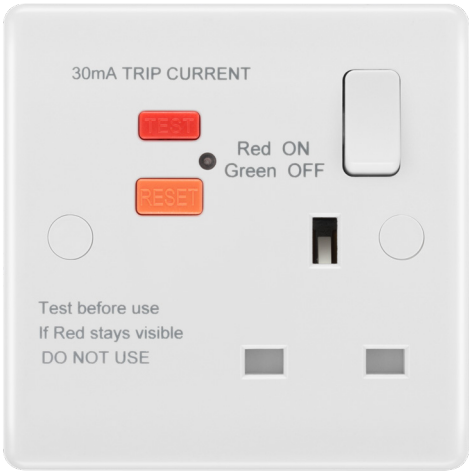

GENERAL	Warranty (years)	30
DIMENSIONS	Product HxWxD (mm)	86x86x38.3
	Front Plate Profile Depth (mm)	6.9
	Front Plate Material Thickness (mm)	3
CONSTRUCTION	Switched	Yes
	Switch Style Type	Rocker
	Switch Position	Right of Socket
	Anti-microbial Property	Yes
	Front Plate Type	Nexus - 800
	Front Plate Material	Urea
ELECTRICAL	Operating Voltage (V)	240
	Frequency (Hz)	50-60
	Current Rating (A)	13
PROTECTION	Earth Terminal Fitted	Yes
	Number of Earth Terminals	2
	RCD Type	Type A
	Rated Sensitivity (mA)	30mA
	Trip Speed (mS)	<40ms
	RCD Mechanism Type	Latching

*Specification is subject to change without notice. Errors and omissions excluded.




Specification Sheet

STYLE	General Colour	White
	Front Plate Colour	Urea White - RAL9016 (Traffic White)
	Front Plate Marking	Yes
	Light Reflective Value (%)	74.3
	Shutter Colour	White
	Switch Colour	Urea White - RAL9016 (Traffic White)
	Switch Indicator Type	Insert
	Switch Indicator Colour	Red
	Main Power Indicator	Yes
	Fixing Screws Colour	White Zinc Plated
	Status Indicator	Yes
	Base Colour	Grey
	Printing Colour	Anthracite Grey - RAL 7016
	Reset Button Colour	Orange
	Test Button Colour	Red
TECHNICAL	Socket Type	G-3P UK Ireland Hong Kong 220-240V 13A
	Switch Type (Ways & Poles)	Double Pole
INSTALLATION	Minimum Box Depth (mm)	35
	Fixing Screws Supplied	Yes
	Terminal Type	Screw
	Terminal Capacity (# x mm ²)	2 x 2.5 4 x 1.0 1 x 4
	Terminal Arrangement	Angled
	Backed-out Terminal Screws	Yes
	Terminals with Colour Coding Print	Yes
	Captive Terminal Screws	Yes
	Screw Caps	Yes
COMPLIANCE	Standard(s)	EU EN 61000-3-3:2013+A2:2021 EU EN 61543:1996 UK BS 7288:2016+A1:2022 UK BS EN 61543:1996
	Directive(s)	EU EMC - 2014/30/EU EU GPSR - 2023/988 (EU) EU LVD - 2014/35/EU EU REACH - 1907/2006/EU EU ROHS - 2011/65/EU UK EMC - UK SI 2016 NO. 1091 UK LVD - UK SI 2016 NO. 1101 UK ROHS - UK SI 2012 NO. 3032
	WEEE Group	2. Small household appliances
BARCODE	Package EAN	5050765299718
	Inner EAN	5050765299725
	Outer EAN	5050765299732

*Specification is subject to change without notice. Errors and omissions excluded.

PART PACKAGING	Package Pack Type	Printed Bag
	Packed HxWxD (mm)	170x120x40
	Package Hanging	Yes
	Packed Gross Weight (kg)	0.157
INNER PACKAGING	Inner Pack Type	Roll Printed Box
	Inner Quantity	10
	Inner HxWxD (mm)	97x187x202
	Inner Gross Weight (kg)	1.663
OUTER PACKAGING	Outer Pack Type	Roll Printed Box
	Outer Quantity	100
	Outer HxWxD (mm)	221x383x503
	Outer CBM (cu.m)	0.04258
	Outer Gross Weight (kg)	17.108
SHIPPING	Commodity Code (EU)	8536508000
EDATA	ETIM Class	Residual current circuit breaker (RCCB)
BG EXTRAS	Other Accessories Provided	Screw Caps

Web URL:
Specification sheet created: 20260911
PG-BG0214

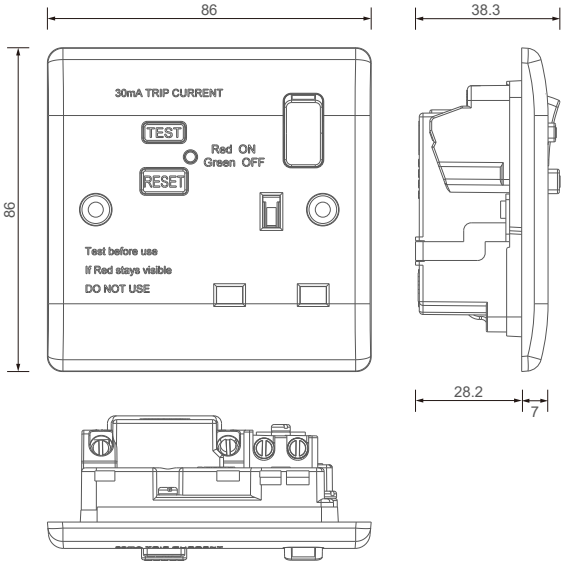

*Specification is subject to change without notice. Errors and omissions excluded.