



Technical Data

20 Amp Double Pole Switch

Brief product description:

The BG Electrical Part M range offers a wide range of suitable solutions to enable compliance to the requirements of Part M1 (Sections 4.25-4.29) with contrasting colours and sleek polycarbonate front plates.

Features:

- Slim and sleek polycarbonate front plate
- Ideal for appliances such as water heaters
- Flush LED indicator
- Captive, backed out terminal screws for fast installation
- Contrasting graphite and white design to aid the visually impaired
- Part M approved

Product Images




PM31

Technical Specifications

Standard(s)	BS EN 60669-1
Rating	20A 250V AC
Contact Gap	3.0mm minimum
Switch Type	Double pole
Terminal Capacity	3 x 2.5mm ² 2 x 4.0mm ² 1 x 6.0mm ²
Light Reflective Value	8.9
RoHS Directive	Yes
WEEE Directive	Yes
Mounting Box Depth (Min)	25mm
Fixing Centres	60.3mm



Line Diagrams

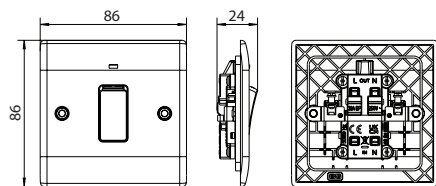

PM31

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
PM31	20A DP SWITCH + LED	Printed Bag	Printed Carton	Printed Carton	1	10	100	5050765106054	5050765106245	5050765106436

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Unpacked Product	Packed Product	Inner Box	Outer Box	Outer Box
PM31	20A DP SWITCH + LED	8.6 x 8.6 x 2.4	13.5 x 12 x 2.5	9.5 x 12.7 x 18.2	20.1 x 26.3 x 50.3	0.059	0.063	0.68	8.77	0.02659