



Technical Data

45 Amp Double Pole Switch


Brief product description:

The BG Electrical Part M range offers a wide range of suitable solutions to enable compliance to the requirements of Part M1 (Sections 4.25-4.29) with contrasting colours and sleek polycarbonate front plates.

Features:

- Slim and sleek polycarbonate front plate
- Easy to install, supplied with fixing screws and installation instructions
- Flush LED indicator
- Colour coded terminals with backed out captive screws for fast installation
- Double pole for peace of mind and safer installation
- Twin earth for high integrity circuits
- Contrasting graphite and white design to aid the visually impaired
- Part M approved

Product Images

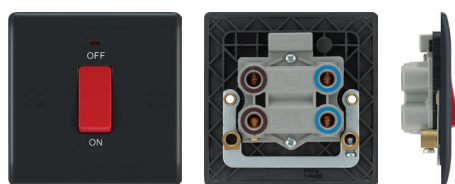

PM74


Technical Specifications

Standard(s)	BS EN 60669-1
Rating	45A 250V AC
Contact Gap	3.0mm minimum
Switch Type	Double pole
Terminal Capacity	4 x 4.0mm ² 3 x 6.0mm ² 1 x 16.0mm ²
Light Reflective Value	8.9
RoHS Directive	Yes
WEEE Directive	Yes
Mounting Box Depth (Min)	47mm
Fixing Centres	60.3mm



Intertek
Lic No.1012

Line Diagrams

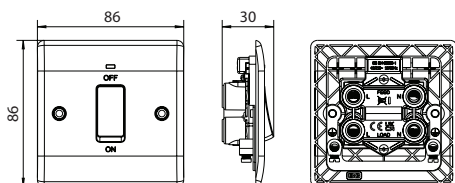

PM74

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
PM74	45A DP SWITCH + LED	Printed Bag	Printed Carton	Printed Carton	1	10	100	5050765106115	5050765106306	5050765106498

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Unpacked Product	Packed Product	Inner Box	Outer Box	Outer Box
PM74	45A DP SWITCH + LED	8.6 x 8.6 x 3.0	13.5 x 12 x 23.2	9.5 x 14.7 x 18.2	20.1 x 230.3 x 49.8	0.105	0.109	1.15	12.08	0.03033

British General Helpline
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.bgelectrical.uk