



Technical Data

Replacement Switchable Dimmer Module

Brief product description:

This replacement dimmer module offers a suitable replacement and simple way to upgrade existing dimmer switches. Compatible with BG 800 Series, 900 Series, Nexus Metal, Evolve and Flatplate Screwless ranges.

Features:

- Switchable Dimmer module for choice of trailing or leading edge (set to trailing edge as default)
- Adjust the lighting level to suit the mood and save power at lower lighting levels
- Soft start brings the lights to a set level in around 1 second and extends the life of lamps
- Smooth dimming control with silent operation - no noise when dimming
- Overload protection prevents failure if you mistakenly connect your dimmer to too many lights or transformers, and will turn the lights down or off until the load is corrected
- Support for lower wattage lamps eliminates flicker
- 2 way push on/off with rotary control
- Suitable for LED, Halogen and Incandescent lamps
- Captive backed out terminal screws for fast installation

Product Images



DMLT

Technical Specifications


Standard(s)	BS EN 60669-2-1
Voltage	200-250V AC
Load Rating (Max/Min per module)	
Dimmable LED	Trailing: 5-150W, Leading: 5-100W
Tungsten/Incandescent	Trailing: 5-200W, Leading: 5-100W
Halogen	Trailing: 5-200W, Leading: 5-100W
Type	Switchable Leading/Trailing Edge (set to Trailing Edge as default)
Terminal Capacity	2 x 1mm ² & 2 x 1.5mm ²
RoHS Directive	Yes
WEEE Directive	Yes
Mounting Box Depth (Min)	25mm





Replacement Switchable Dimmer Module

Line Diagrams

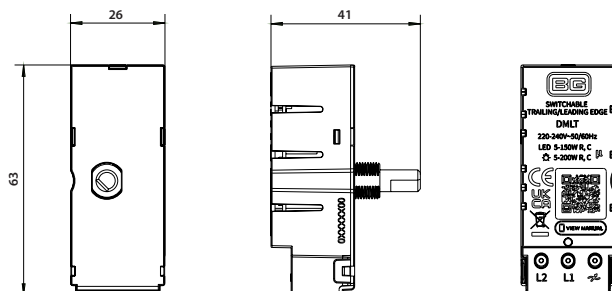

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
DMLT	2-Way Dual Mode Dimmer Module	Bag	Colour Box	Carton	1	20	200	5050765262156	5050765262163	5050765262170

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm			Weight (kg)			CBM (m³)
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
DMLT	2-Way Dual Mode Dimmer Module	6.3 x 2.6 x 4.1	9.3 x 14.2 x 16.7	17.6 x 29.3 x 48.5	0.32	0.7	7.36	0.02501