

### Brief Product Description

This analogue timer is part of the BG circuit protection range of control devices and is suitable for use within any BG consumer unit or enclosure.

This analogue timer is part of the BG Circuit Protection range of control devices and is suitable for use in any BG consumer unit or enclosure. The timer is programmed by pushing in the blue segments to set the required operating periods. It features an easy-to-read dial, a minimum switching interval of 30 minutes, a continuous ON/OFF mode, and an AUTO setting for timed operation.

### Features

- 1 Channel
- IP20 Rating
- Daily Programme
- Summer/Winter Time Correction
- 2-Module Width
- Fine Adjustment for Accurate Time Setting


### Part Code

| Cat No. | Description            |
|---------|------------------------|
| CUTS5   | 24-Hour Analogue Timer |

### Product Images



### Dimensional Line Drawing

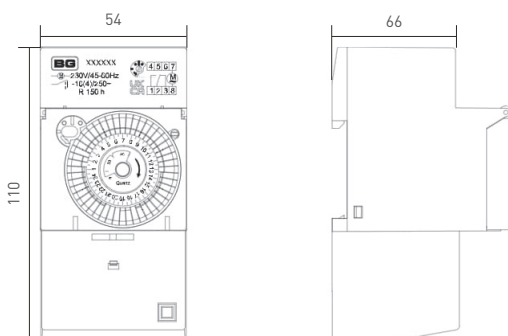

### Dimensions of Product

Height: 110 mm  
 Width: 54 mm  
 Depth: 66 mm

### Technical Specifications (16A - 40A)

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Channels                        | Push Fit                                |
| Programme Type                  | Daily Programme                         |
| Shortest Switching Time         | 30 Minutes                              |
| Permanent ON/Off Switch         | Yes                                     |
| Manual Switching                | Yes                                     |
| Switching Display Status        | Yes                                     |
| Rated Operational Voltage Ue    | 230V                                    |
| Operating Temperature Range     | -10°C - + 50°C                          |
| Power Consumption               | 1.5VA                                   |
| Power Reserve                   | 7 Days                                  |
| Time Accuracy                   | ± 2 sec/day                             |
| Switching Capacity              | Resistive Load 16A<br>Inductive Load 4A |
| Switching Segments              | 48                                      |
| Number of Mechanical Operations | 10,000                                  |





### Guarantee

BG Electrical Circuit Protection products are guaranteed against faulty materials and workmanship for a period of 10 years from date of delivery.

Products will be repaired or (at BG Electrical's discretion) replacements will be supplied or (at BG Electrical's discretion) a credit note will be issued. This guarantee is subject to BG Electrical's conditions of sale and in particular to the following conditions being met.



1. Notification of any defect is given as soon as reasonably practicable after becoming apparent, and the products then returned to BG Electrical.
2. The products have only been operated under normal operating conditions and have only been subject to normal use.
3. No work (other than normal and proper maintenance) has been carried out to the products without BG Electrical's prior written consent.
4. The products have been assembled, or incorporated into other goods, by a qualified and recognised electrician and only in accordance with any instructions issued by BG Electrical.
5. The defect has not arisen from an item manufactured or supplied by a person other than BG Electrical.

This guarantee does not affect any customer statutory rights.

All components used in a BG Electrical enclosure, must be supplied by BG Electrical.

The use of any other components will negate compliance to BS 61439 and the BG Electrical guarantee. Failure to fit the enclosure in accordance with these instructions will invalidate the guarantee.