



**Kingfisher  
Lighting**

## Datasheet

# Auriga 2.0 Series



### Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 136 luminaire lm/W and will be capable of producing up to 7950 luminaire lumens at 4000K with a CRI >70. It shall be rated at IP66 and IK08.

### Specification

Weight: 9.5 - 13.5 kg  
Windage: 0.15m<sup>2</sup>  
Material: Die-cast Aluminium  
Paint Finish: Anthracite Grey



### Key Features

- 22W - 60W
- 2,992 - 7,950 Luminaire Lumens
- Efficacy up to 136 lm/W
- 4000K, CRI >70
- Lifetime >70,000hr
- Symmetrical - Stirrup
- Asymmetrical - Post top/ side entry
- Post Top/ side entry 60mm




### Optics

Auriga 2.0



### Dimensions

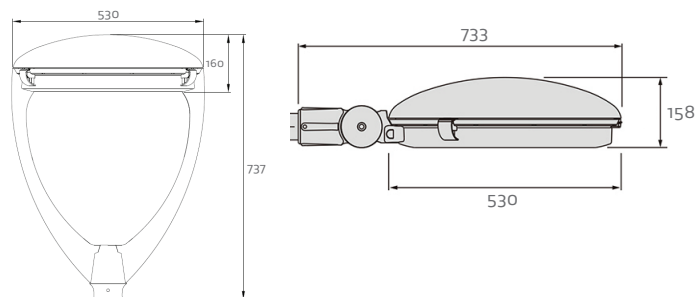

All measurements in mm

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
AURPS22T3AF	22W	LED	2992	Asymmetrical Street Optic Wide	4000	IP66	IK08	9.5	Anthracite Grey
AURPS40T3AF	40W	LED	5400		4000	IP66	IK08	9.5	Anthracite Grey
AURPS60T3AF	60W	LED	7950		4000	IP66	IK08	9.5	Anthracite Grey
AURST22T1F	22W	LED	2992	Symmetrical 90° Optic	4000	IP66	IK08	13.5	Anthracite Grey
AURST40T1F	40W	LED	5400		4000	IP66	IK08	13.5	Anthracite Grey
AURST60T1F	60W	LED	7950		4000	IP66	IK08	13.5	Anthracite Grey



### Accessories / Options

- DALI Dimmable
- Photocell options

### Mounting Options

- Post Top 60mm

