

LED PLATINUM RECESSED DOWNLIGHT

LDP20Wxx

Class III for LED panel, Class II for LED driver, Class II for the whole product.
Indoor use only



LIGHT SURFACE



This Luminaire contains a light source of Class <D>

- ES** Esta luminaria contiene una fuente luminosa de clase <D>
- FR** Ce luminaire une source de classe <D>
- IT** Questo apparecchio contiene una sorgente luminosa di classe <D>
- PT** Esta luminária contém uma fonte de luz de classe <D>
- DE** Diese Leuchte enthält eine Lichtquelle der Klasse <D>

ASSEMBLY AND INSTALLATION

EN

- For emergency options, please use Luceco "plug and play" LED3EP80-02 Emergency Pack

ZUSAMMENBAU UND INSTALLATION

DE

- Für eine optionale Notstromversorgung, verwenden Sie bitte die LUCECO-Notstromversorgung LED3EP80-02

NOTICE D'ASSEMBLAGE ET DE MONTAGE

FR

- Pour la fonction Urgence, merci d'utiliser le pack Luceco "plug and play" LED3EP80-02

MONTAJE E INSTALACIÓN

ES

- Para necesidades con emergencia, utilice nuestro Pack de Emergencia "Plug & Play" LED3EP80-02





MONTAGGIO E INSTALLAZIONE

IT

- Per le opzioni di emergenza, si prega di utilizzare Luceco "plug and play" "LED3EP80-02 emergenza pack



luminaires not suitable for covering with thermally insulated material

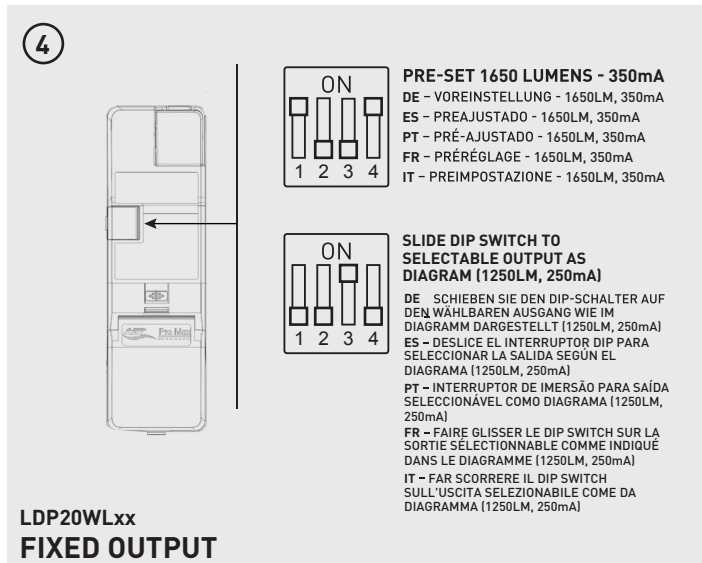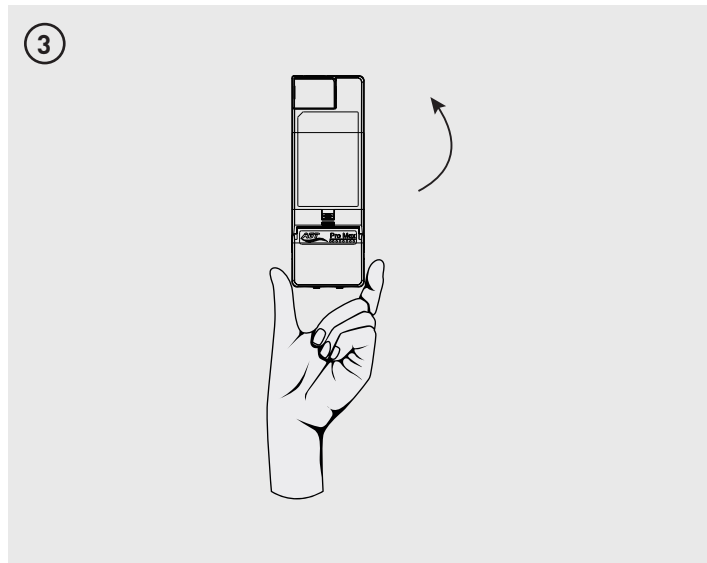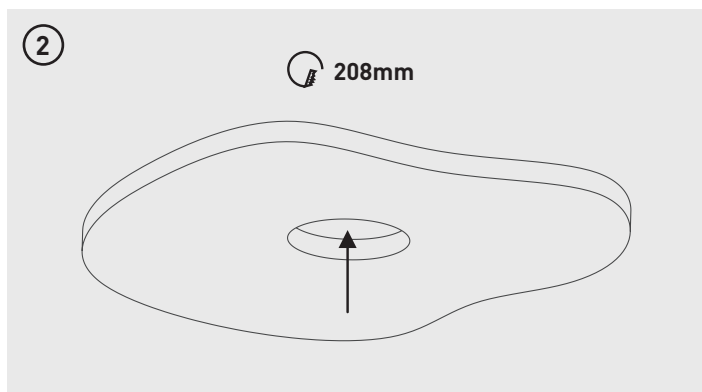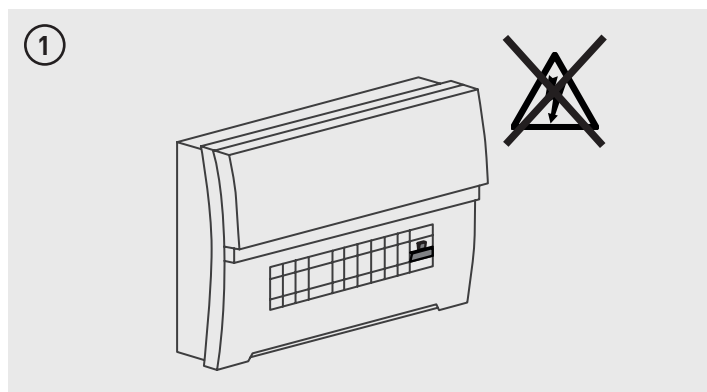

Tech Help Line
UK - 0330 0249 279
Non UK - +44 (0)1952 238 100
Supplied by LUCECO
Stafford Park 1, Telford, Shropshire,
England, TF3 3BD
Visit our website at www.luceco.com

Servicio de asistencia telefónica
UK - 0330 0249 279
Non UK - +34 93 829 55 74
(EU) Luceco SE
C/ Bobinadora 1-5
08302 Mataró Spain
Visite nuestra web en www.luceco.com

5




PRE-SET 1650 LUMENS - 350mA
 DE - VOREINSTELLUNG - 1650LM, 350mA
 ES - PREAJUSTADO - 1650LM, 350mA
 PT - PRÉ-AJUSTADO - 1650LM, 350mA
 FR - PRÉRÉGLAGE - 1650LM, 350mA
 IT - PREIMPOSTAZIONE - 1650LM, 350mA



SLIDE DIP SWITCH TO SELECTABLE OUTPUT AS DIAGRAM (1250LM, 250mA)
 DE - SCHIEBEN SIE DEN DIP-SCHALTER AUF DEN WÄHLBAREN AUSGANG WIE IM DIAGRAMM DARGESTELLT (1250LM, 250mA)
 ES - DESLICE EL INTERRUPTOR DIP PARA SELECCIONAR LA SALIDA SEGÚN EL DIAGRAMA (1250LM, 250mA)
 PT - INTERRUPTOR DE IMERSÃO PARA SAÍDA SELECIONÁVEL COMO DIAGRAMA (1250LM, 250mA)
 FR - FAIRE GLISSER LE DIP SWITCH SUR LA SORTIE SÉLECTIONNABLE COMME INDICUÉ DANS LE DIAGRAMME (1250LM, 250mA)
 IT - FAR SCORRERE IL DIP SWITCH SULL'USCITA SELEZIONABILE COME DA DIAGRAMMA (1250LM, 250mA)

LDP20WLxx
DALI DIMMABLE

6



PRE-SET 2500 LUMENS - 500mA
 DE - VOREINSTELLUNG - 2500LM, 500mA
 ES - PREAJUSTADO - 2500LM, 500mA
 PT - PRÉ-AJUSTADO - 2500LM, 500mA
 FR - PRÉRÉGLAGE - 2500LM, 500mA
 IT - PREIMPOSTAZIONE - 2500LM, 500mA



SLIDE DIP SWITCH TO SELECTABLE OUTPUT AS DIAGRAM (3300LM, 700mA)
 DE - SCHIEBEN SIE DEN DIP-SCHALTER AUF DEN WÄHLBAREN AUSGANG WIE IM DIAGRAMM DARGESTELLT (3300LM, 700mA)
 ES - DESLICE EL INTERRUPTOR DIP PARA SELECCIONAR LA SALIDA SEGÚN EL DIAGRAMA (3300LM, 700mA)
 PT - INTERRUPTOR DE IMERSÃO PARA SAÍDA SELECIONÁVEL COMO DIAGRAMA (3300LM, 700mA)
 FR - FAIRE GLISSER LE DIP SWITCH SUR LA SORTIE SÉLECTIONNABLE COMME INDICUÉ DANS LE DIAGRAMME (3300LM, 700mA)
 IT - FAR SCORRERE IL DIP SWITCH SULL'USCITA SELEZIONABILE COME DA DIAGRAMMA (3300LM, 700mA)

LDP20WHxx
FIXED OUTPUT

7



PRE-SET 2500 LUMENS - 500mA
 DE - VOREINSTELLUNG - 2500LM, 500mA
 ES - PREAJUSTADO - 2500LM, 500mA
 PT - PRÉ-AJUSTADO - 2500LM, 500mA
 FR - PRÉRÉGLAGE - 2500LM, 500mA
 IT - PREIMPOSTAZIONE - 2500LM, 500mA



SLIDE DIP SWITCH TO SELECTABLE OUTPUT AS DIAGRAM (3300LM, 700mA)
 DE - SCHIEBEN SIE DEN DIP-SCHALTER AUF DEN WÄHLBAREN AUSGANG WIE IM DIAGRAMM DARGESTELLT (3300LM, 700mA)
 ES - DESLICE EL INTERRUPTOR DIP PARA SELECCIONAR LA SALIDA SEGÚN EL DIAGRAMA (3300LM, 700mA)
 PT - INTERRUPTOR DE IMERSÃO PARA SAÍDA SELECIONÁVEL COMO DIAGRAMA (3300LM, 700mA)
 FR - FAIRE GLISSER LE DIP SWITCH SUR LA SORTIE SÉLECTIONNABLE COMME INDICUÉ DANS LE DIAGRAMME (3300LM, 700mA)
 IT - FAR SCORRERE IL DIP SWITCH SULL'USCITA SELEZIONABILE COME DA DIAGRAMMA (3300LM, 700mA)

LDP20WHxx
DALI DIMMABLE

8

FIXED OUTPUT WIRING


DE - FESTE AUSGANGSVERDRÄHTUNG
 ES - CABLEADO FIJO DE SALIDA
 PT - CABLAGEM DE SAÍDA FIXA
 FR - CÂBLAGE DE SORTIE FIXE
 IT - CABLAGGIO DELL'USCITA FISSA



9

DALI DIMMABLE


DE - DALI DIMMABLE
 ES - REGULABLE DALI
 PT - DALI DIMMABLE
 FR - DALI DIMMABLE
 IT - DIMMERABILE DALI

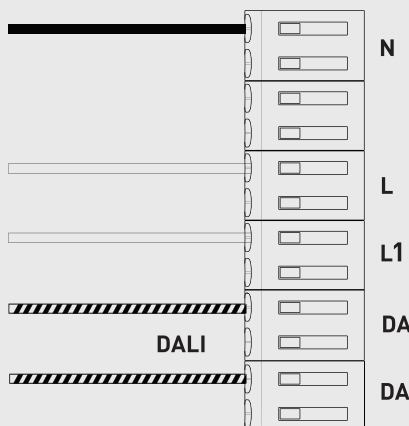

10

PUSH TO MAKE SWITCH DIMMING

DE - SCHALTER ZUM DIMMEN DRÜCKEN
 ES - PULSAR PARA REGULACIÓN CON EL INTERRUPTOR
 PT - EMPURRAR PARA FAZER A ESCURECIMENTO DO INTERRUPTOR
 FR - POUSSER POUR FAIRE VARIER L'INTENSITÉ DE L'INTERRUPTEUR
 IT - INTERRUPTORE DI DIMMERAZIONE PUSH TO MAKE

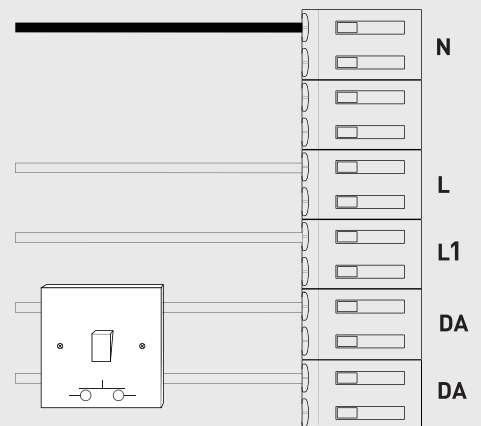

Tech Help Line

UK - 0330 0249 279

Non UK - +44 (0)1952 238 100

Supplied by LUCECO

Stafford Park 1, Telford, Shropshire,
 England, TF3 3BD

Visit our website at www.luceco.com

Servicio de asistencia telefónica

UK - 0330 0249 279


Non UK - +34 93 829 55 74

(EU) Luceco SE


C/ Bobinadora 1-5
 08302 Mataró Spain

Visite nuestra web en www.luceco.com


11

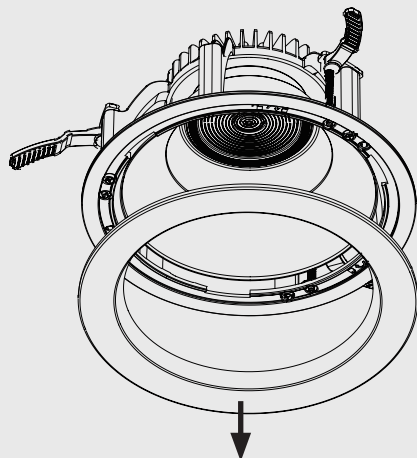


12

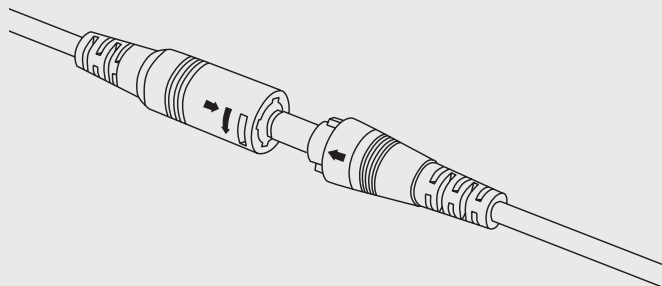


13

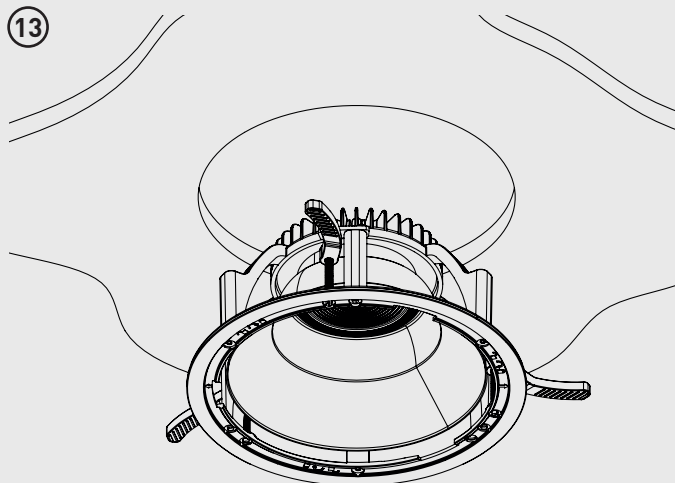


14

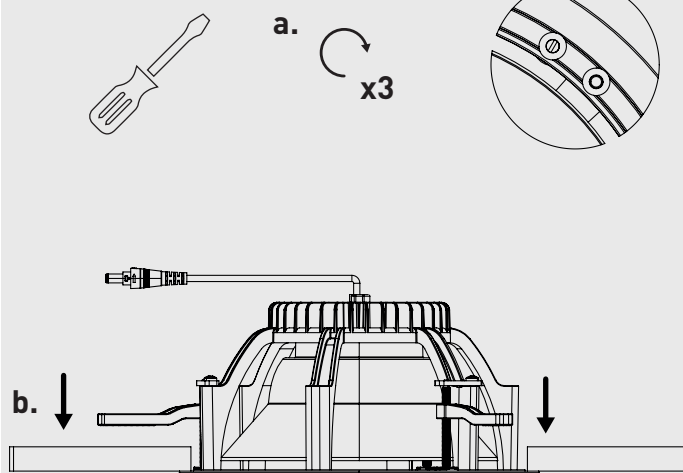

15

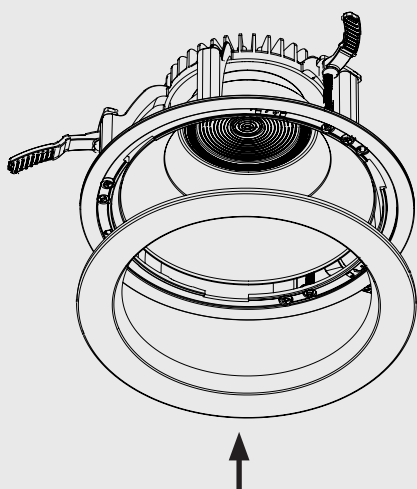

16

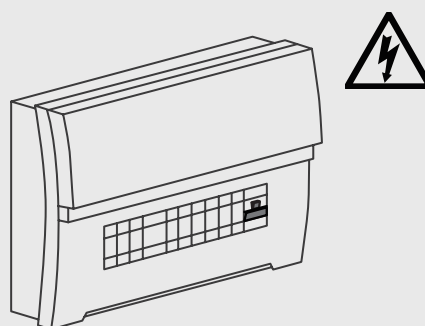

Tech Help Line
UK - 0330 0249 279
Non UK - +44 (0)1952 238 100
Supplied by LUCECO
Stafford Park 1, Telford, Shropshire,
England, TF3 3BD
Visit our website at www.luceco.com


Servicio de asistencia telefónica
UK - 0330 0249 279
Non UK - +34 93 829 55 74
(EU) Luceco SE
C/ Bobinadora 1-5
08302 Mataró Spain
Visite nuestra web en www.luceco.com

ACCESSORIES AVAILABLE

DE- ERHÄLTliches ZUBEHÖR / FR- ACCESSOIRES DISPONIBLES
ES- ACCESORIOS DISPONIBLES / IT- ACCESSORI DISPONIBILI

IP65 BEZELS


DE- IP65 Dekorring / FR- Colletteres IP65 / ES- Biseles IP65 / IT- IP65 Cornici

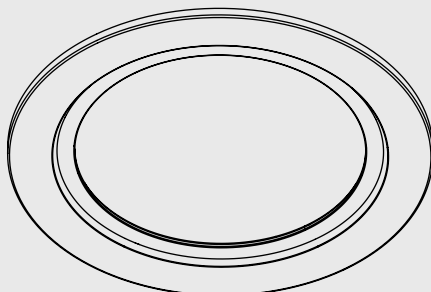


LDP20BWHIPF/LDP20BWHIP

DECORATIVE GLASS BEZELS

DE- Glas Dekorring / FR- Colletteres Décoratives transparentes
ES- Biseles Cristal Decorativo / IT- Cornici Vetro decorativi

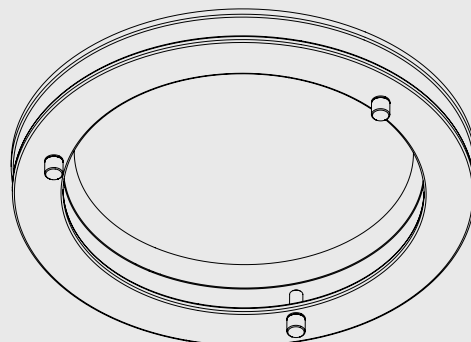

LDP20BWHDH/LDP20BWHDF/LDP20BPCDH
LDP20BPCDF/ LDP20BBSDH/LDP20BBSDF

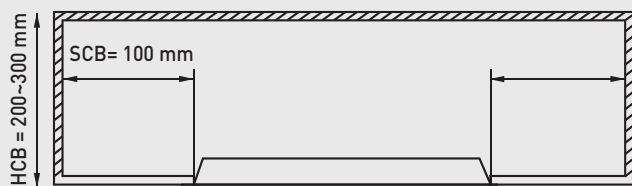

Warning-risk of overheating or fire if the clearance distance are compromised risk of fire-required clearance from structural members and building elements.

LIGHT SOURCE WARNING

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person"

Code	Wattage	Total Lumen	Useful Lumen	IP Rating	Current
LDP20WLMxx	9.5W	1250	1130	IP44	250mA
	13W	1650	1600	IP44	350mA
LDP20WLGxx	9.5W	1250	1130	IP44	250mA
	13W	1650	1600	IP44	350mA
LDP20WLBxx	9.5W	1050	1000	IP44	250mA
	13W	1500	1420	IP44	350mA
LDP20WHMxx	19W	2500	2310	IP44	500mA
	26W	3300	3030	IP44	700mA
LDP20WHGxx	19W	2500	2310	IP44	500mA
	26W	3300	3030	IP44	700mA
LDP20WHBxx	19W	2100	2020	IP44	500mA
	26W	2800	2680	IP44	700mA
LDP20WXHMxx	53W	6600	6000	IP40	1400mA
LDP20WXHGxx	53W	6600	6000	IP40	1400mA

Tech Help Line

UK - 0330 0249 279

Non UK - +44 (0)1952 238 100

Supplied by LUCECO

Stafford Park 1, Telford, Shropshire,
England, TF3 3BD

Visit our website at www.luceco.com

Servicio de asistencia telefónica

UK - 0330 0249 279

Non UK - +34 93 829 55 74

(EU) Luceco SE

C/ Bobinadora 1-5
08302 Mataró Spain

Visite nuestra web en www.luceco.com