

WALLWASHER


Product Features

- Die-cast aluminium construction with lockable adjustability and multifaceted reflector
- 35W and 70W CDM-T equivalent lumen outputs supplied with 24 and 38 degree distribution
- Recessed mounted secured with heavy duty steel spring tabs
- **This range is made to order including black versions. Please speak to a Luceco team member for further information**



| CAT NO. | DRIVER | LUMINAIRE LUMENS | WATTAGE | EFFICACY Llm/cW |
|-----------|--------------|------------------|---------|-----------------|
| LWCW20S40 | Fixed Output | 1900 | 22W | 86 |
| LWCW34S40 | Fixed Output | 3200 | 38W | 84 |

Product Drawing

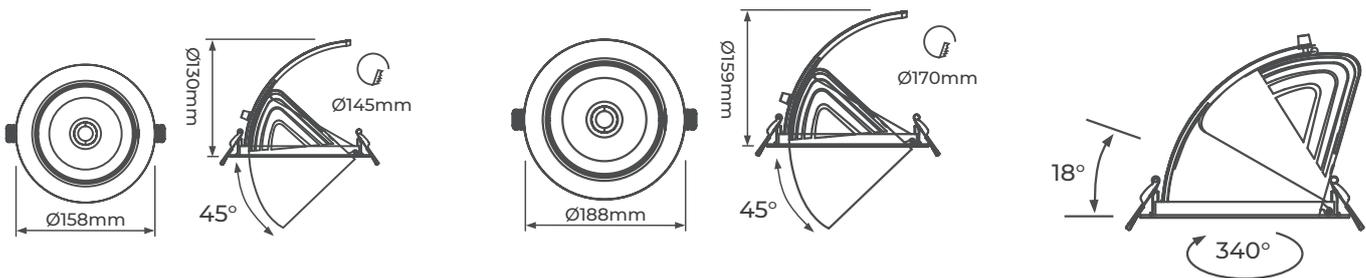

LWCW20S40

LWCW34S40

| CAT NO. | WEIGHT (kg) | CRI | FREQUENCY (Hz) | SDCM | UGR | TEMP RANGE (°C) | AMBIENT TEMP RATED LIFE (°C) | L/B RATED LIFE |
|-----------|-------------|-----|----------------|------|-----|-----------------|------------------------------|----------------|
| LWCW20S40 | 0.7 | >80 | 50-60 | <3 | <22 | -20 to +25 | 25 | L70 / B50 |
| LWCW34S40 | 1.2 | >80 | 50-60 | <3 | <23 | -20 to +25 | 25 | L70 / B50 |

| STANDARD | DESCRIPTION |
|--------------|--|
| EN 60598-1 | Luminaire – General requirements |
| EN 60598-2-2 | Luminaire – Recessed |
| EN 61000-3-2 | Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions |
| EN 61000-3-3 | Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection |
| EN 61547 | Equipment for general lighting purposes – EMC immunity requirements |
| EN 55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar |



LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012