

COLOUR
CHANGING

DECORATIVE INDOOR LED BULKHEAD COLOUR CHANGE

Product Features

- 3 step colour changing using a standard light switch
- 3000K, 4000K, 6500K
- IP54 rated-ideal for bathrooms, utility and decorative installations
- Easy quick installation – Wall or Ceiling mounted
- Push fit quick install terminal block
- Interchangeable twist on and off white and polished chrome bezels for classic or decorative finishes*



CAT NO.	COLOUR TEMPERATURE	LUMINAIRE LUMENS	WATTAGE
EBH22SCC	3000K 4000K 6500K	3000K – 1300Lm 4000K – 1500Lm 6500K – 1400Lm	14W



Product Accessories



Chrome Bezel | White Bezel

* Supplied with both Chrome and White Bezel

Product Drawing





CAT NO.	WEIGHT (kg)	EFFICACY (lm/W)	CRI	FREQUENCY (Hz)	IK RATING	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EBH22SCC	0.55	3000K – 87 4000K – 100 6500K – 93	>80	50-60	IK08	25	L70 / B50

EBH22SCC

Luminaire Performance

Light Output Ratio: 99.89%
 Luminaire Efficacy: 92.75 lm/W
 Light Distribution: A41±97.9%±2.1%
 CIE Flux Codes: 44 74 92 98 100
 UGR 4H 8H
 (20%, 50%, 70%) C0 / C90: 26.8 / 26.9

Luminous Intensity

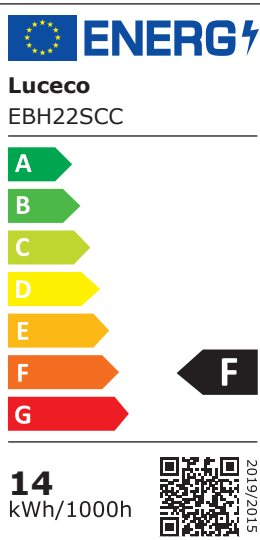

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment