


20W OPEN AREA 360° LIGHT TUBE WORKLIGHT WITH TRIPOD

Product Features

- Telescopic light tube - 360° light output
- Foldaway hanging hook and legs for compact storage
- 3 work light modes: Low 330lm, Mid 650lm, High 1500lm
- Waterproof switch
- Strong and durable casing
- Supplied with USB-C charging cable
- Can be held, supported and hung



CAT NO.	LUMINAIRE LUMENS	WATTAGE	CHARGING TIME	WORKING TIME
LILA150S65	1500	20W	8hrs	2hrs at max

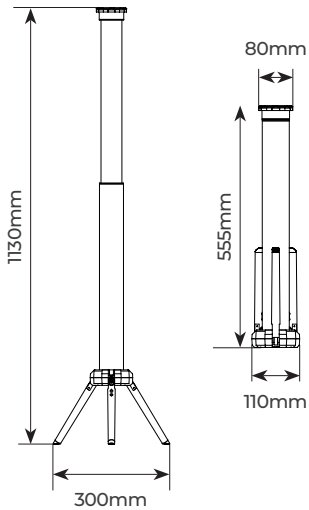

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment