


EMERGENCY PACK


Product Features

- Universal emergency packs compatible with most LED Panels and commercial downlights
- Can be retro-fitted to fixed output or dimmable drivers
- LiFePO₄ battery technology
- User replaceable universal batteries (2 x 2,000mAh 18650 Batteries)

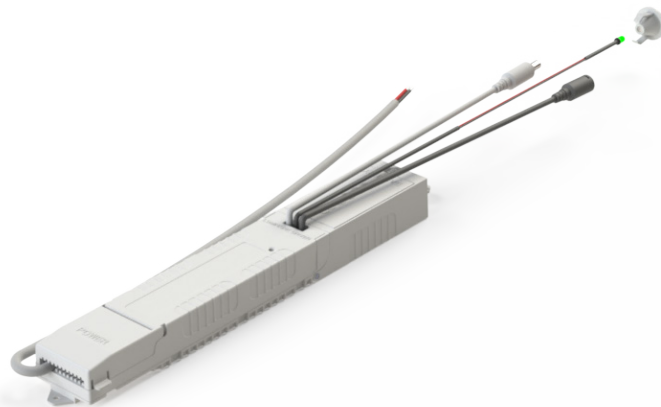

CAT NO.	TYPE	WATTAGE
LED3EP2W-01	Maintained Mode in Combination with LED driver	2W

Product Drawing

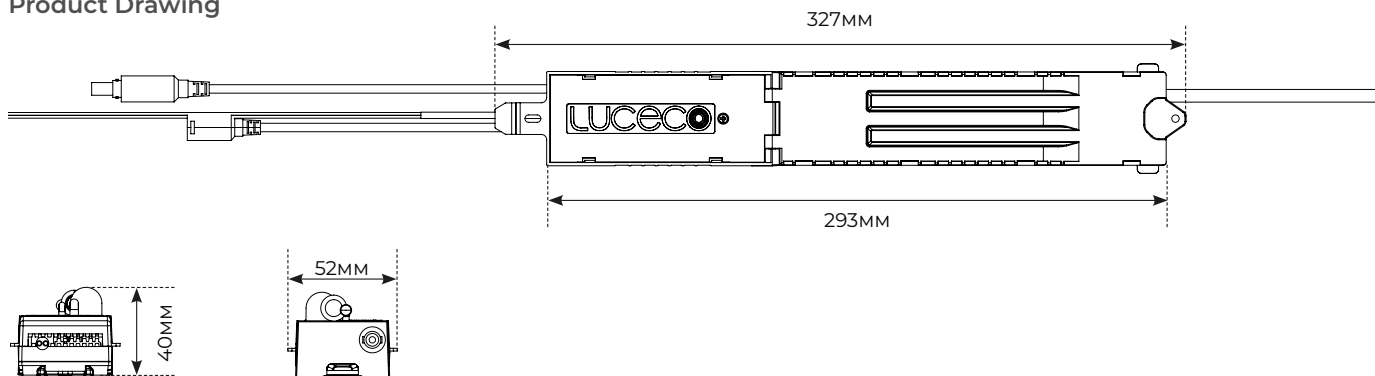

CAT NO.	WEIGHT	MIN. CUTOUT SIZE	VOLTAGE	FREQUENCY	TEMP. RANGE	AMBIENT TEMP RATED LIFE	BATTERY CHARGE TIME	PACK WARRANTY	BATTERY WARRANTY
LED3EP2W-01	0.33	55mm	220-240V	50-60	0-30°C	25°C	24hrs	5 years	5 years

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-22	Luminaires – Particular requirements. Luminaires for emergency lighting.
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic current emissions (equipment input current ≤16 A per phase)
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.