

SOLAR SECURITY FLOODLIGHT MENSA 10W HIGH OUTPUT COLOUR CHANGE & REMOTE CONTROL


Product Features

- Durable die-cast aluminium cover
- UV-proof optical lens for uniform light distribution
- Super bright light output
- High-efficiency monocrystalline solar panel
- Battery indicator showing battery life and charging state
- Li-ion battery for a longer lifespan
- Charging time of 4-6 hours
- IP65 rated
- 5m extension cord



CAT NO.	LUMINAIRE LUMENS	WATTAGE	BATTERY CAPACITY	COLOUR
LEXSFD10BCC	1500	10W	18650, 3.7V, 3600mAh, 13.32Wh	Black

Product Drawing

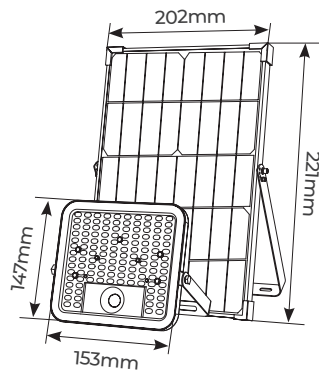

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

