

CARBON ULTRA DOWNLIGHT

Product Features

- Recessed mounted suitable for plasterboard or suspended ceiling systems
- Offering up to 130Lm/W whilst providing less distracting glare – reducing eye fatigue and providing a more comfortable ambiance
- CCT Change 3000K & 4000K




CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	CUTOUT
LCU6SCCT	Fixed Output	1900	15W	150mm
LCU8SCCT	Fixed Output	2650	21W	200mm

PRODUCT OPTIONS	
Dimmable	Insert D , eg. LCU6DCCT
Add Luceco Platform Wireless	Insert LPW , eg. LCU6LPWCCT

PRODUCT ACCESSORIES	
Remote 3hr LED Emergency Pack	LED3EP2W

Product Drawing

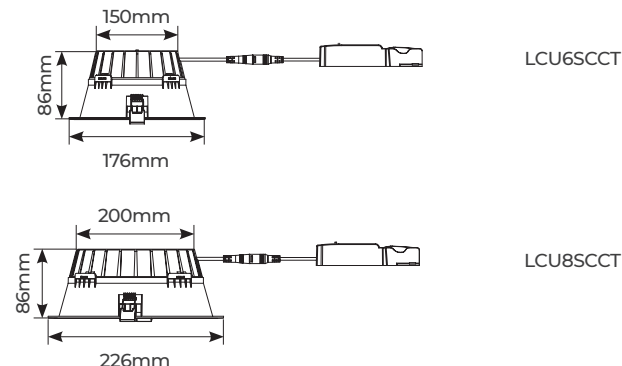

CAT NO.	WEIGHT (kg)	EFFICACY (Lm/W)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LCU6SCCT	0.38	126	>80	50-60	IK03	-20 - +40	25	L70 / B50
LCU8SCCT	0.52	126	>80	50-60	IK03	-20 - +40	25	L70 / B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

