



TEMPUS DALI EMERGENCY BULKHEAD

Product Features

- Surface mount maintained emergency bulkhead for internal or external use
- Two screw diffuser design with rear and side cable entry points
- Can be wired for non-maintained use
- Supplied with self-adhesive legend kit

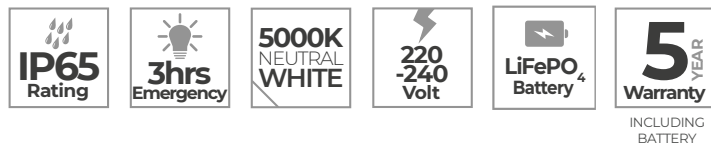

Product Drawing

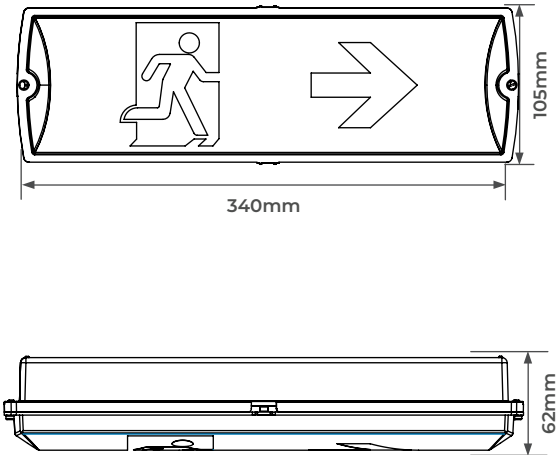

CAT NO.	TYPE	COLOUR	LUMINAIRE LUMENS	WATTAGE
LEMBKWEDA	DALI	White	200lm	2W
LEMBKBEDA	DALI	Black	200lm	2W

	HEIGHT	AXIAL DISTANCE FROM WALL	AXIAL SPACING	TRANSVERSE SPACING	TRANSVERSE SPACING FROM WALL
OPEN AREA	2.5	2	8	8	2
- 0.5 LUX	3	2	9	9	2
	4	2	10	10	2
ESCAPE ROUTE	2.5	-	-	8	2
- 1 LUX	3	-	-	8.2	2
(Based on 2m width)	4	-	-	8.4	2

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	RECHARGE TIME	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMBKWEDA	0.95	>80	50-60	IK08	LIFEPO4	24 Hours	0 – 45°C	25°C
LEMBKBEDA	0.95	>80	50-60	IK08	LIFEPO4	24 Hours	0 – 45°C	25°C

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp control gear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

